


Fitting for 1 top-running wooden door up to 15 kg (33 lbs.), with screwed on or groove mounted running track. Design Forslide.

Product highlights


- Flexibility** Flexible, efficient assembly with single running tracks for screw fixing, gluing, or with swivel lugs
- Aesthetics** Elegant, single door solution with invisible running system

Technical specifications

- Max. 15 kg (33 lbs.)
- Max. 1400 mm (4'7 1/8")
- Max. 1000 mm (3'3 3/8")
- 19–25 mm (3/4" to 31/32")

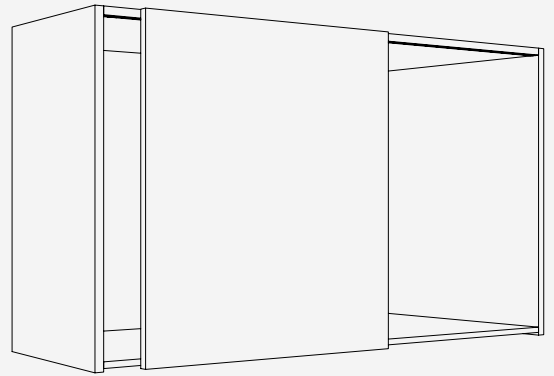








Installation examples

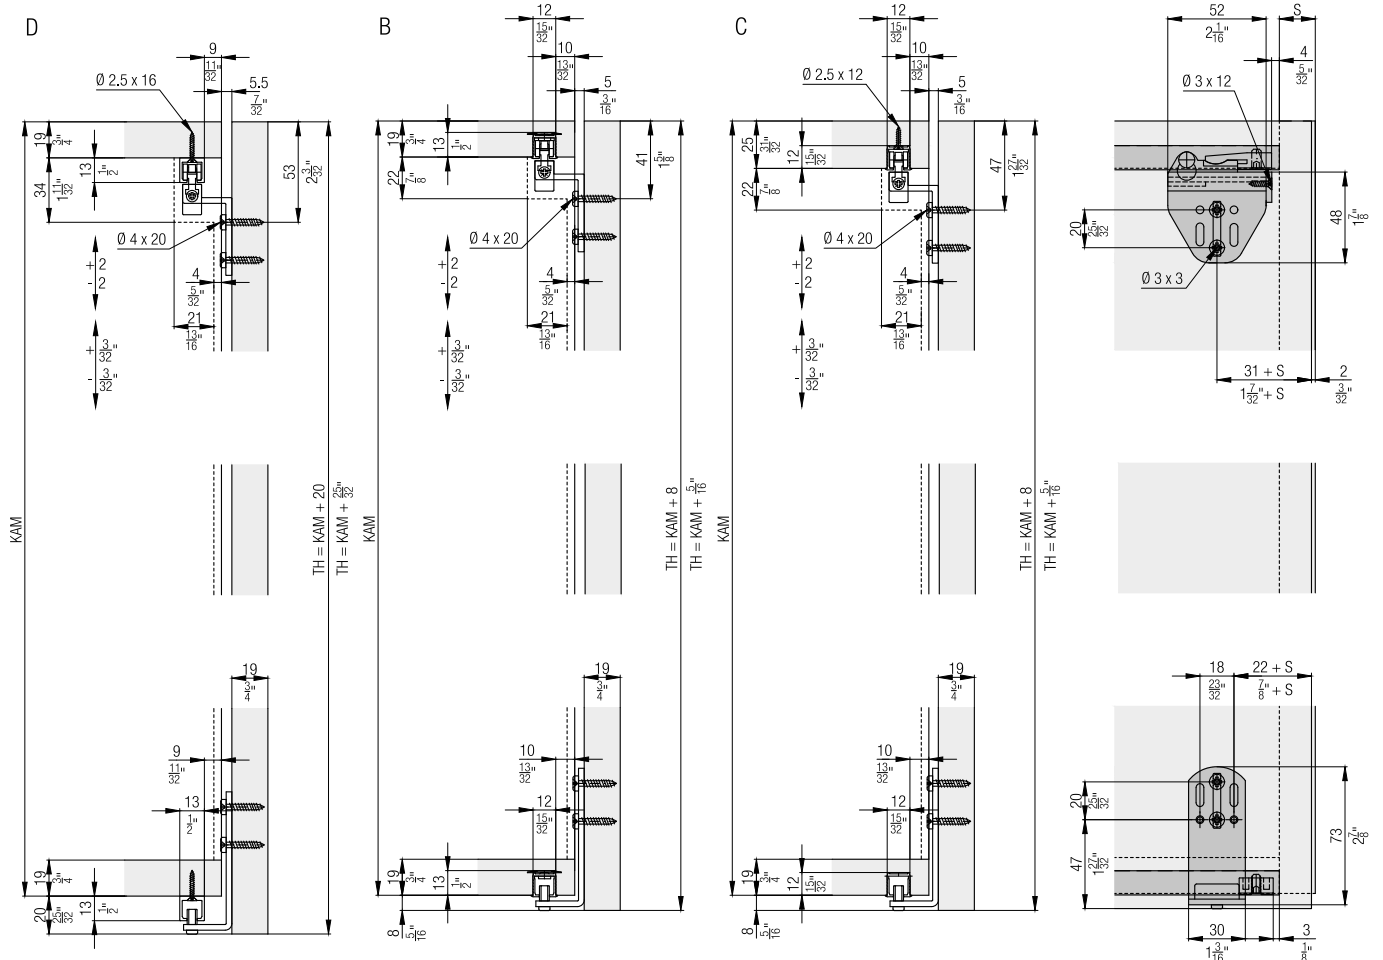





**Set for 1 wooden door up to 15 kg (33 lbs.), with height adjustment**

	No.
Hawa Clipo 15 H FS, for 1 door	053.3051.071



**Set consisting of:**

		053.3051.071	No.
	Running gear, to slide in	2	053.3032.071
	Flat countersunk head chipboard screw, 3x12 mm (1/8"x15/32"), steel, zinc-plated	2	766.5030.112
	Stopper, plastic, gray	2	053.3080.071
	Track support clip, plastic, gray	1	053.3087.001
	Housing for wooden doors, to screw fixing, aluminum	2	053.3048.002
	Angle plate guide, steel, zinc-plated	2	053.3050.172
	Stopper to guide angle, plastic, gray	2	053.3092.001


**Running tracks**

		mm (inch)	No.
	A: Single running track, for press fitting or glueing, aluminum	2,500 (8' 2 7/16")	053.3007.250
		3,500 (11' 5 25/32")	053.3007.350
		6,000 (19' 8 7/32")	053.3007.600
	B: Single running track, with swivel lug, notched on both sides, aluminum (not for hard wood/MDF)	2,500 (8' 2 7/16")	053.3008.250
		3,500 (11' 5 25/32")	053.3008.350
		6,000 (19' 8 7/32")	053.3008.600
	C: Single running track, notched on both sides, aluminum, pre-drilled	2,500 (8' 2 7/16")	053.3009.250
		3,500 (11' 5 25/32")	053.3009.350
		6,000 (19' 8 7/32")	053.3009.600
	D: Single running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	053.3035.250
		3,500 (11' 5 25/32")	053.3035.350
		6,000 (19' 8 7/32")	053.3035.600


**Handle profiles**

		mm (inch)	No.
	Handle profile, groove for brush seal, for groove mounting, aluminum, anodized, for door thickness of 19 mm (3/4")	2,500 (8' 2 7/16")	056.3028.250
		6,000 (19' 8 7/32")	056.3028.600
	Handle profile, groove for brush seal, for screw fixing, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	055.3140.250
		6,000 (19' 8 7/32")	055.3140.600


**Accessories**

		No.
	Track cleaner, plastic, red	040.3142.071


**Further installation examples**

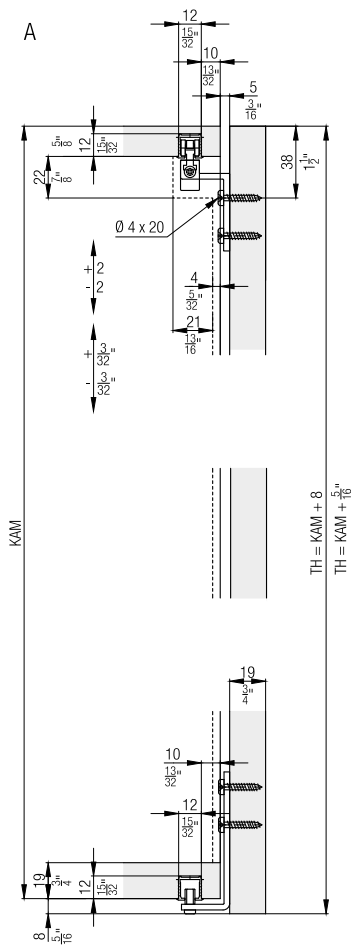


**Calculations**

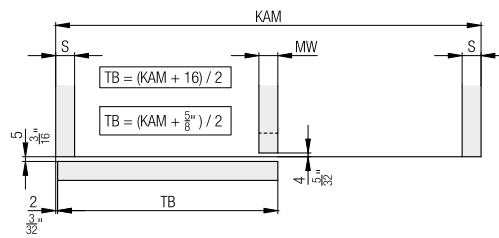

**Handle profiles**

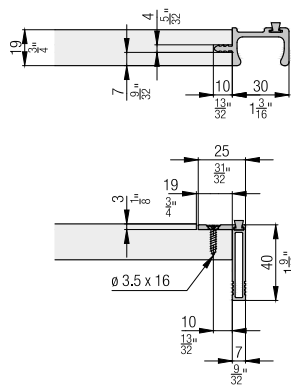

**Notched track**



**Accessories**

– Straightening fitting from page 236

**Planning/execution**

Further information about the product can be found on [www.hawa.com](http://www.hawa.com).