


SL-PP62K1

Push button 62 mm



TECHNICAL DRAWING

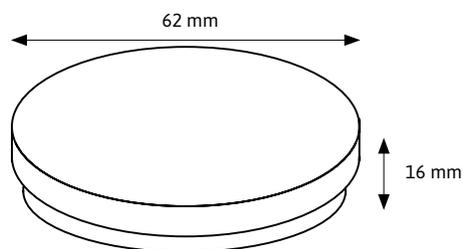

PRODUCT FEATURES

- ▶ Push button for sticking in the room or furniture.
- ▶ No battery and no wiring necessary!
- ▶ Battery-free device without external power supply.
- ▶ Transmission energy is generated from mechanical energy when the push button is pressed.
- ▶ Radio-based range up to 80 meters
- ▶ Push Button can be connected to any number of Push Power Receivers.
- ▶ Functions: ON - OFF - DIM for MONO receiver ON - OFF - DIM for DUO receiver (no color change possible!!)
- ▶ A changeover switch function is provided when several switches are used.
- ▶ Available in black (K1) version

ASSEMBLY

- ▶ Installation by simply gluing in any position.
- ▶ The substrate must be clean, grease-free and stable.

DIMENSIONS

- ▶ Push button (DxH): 62 x 16 mm

TECHNICAL FEATURES


- ▶ Transfer protocol: RF 433 mhz
- ▶ Range (without mesh): 30 meters (indoors)
- ▶ IP Rating: IP44 (IP 20 when the adhesive backing is removed)

SAFETY AND INSTALLATION INSTRUCTIONS


- ▶ This product is not a toy and is not suitable for children!
- ▶ The SIRO LED system is only suitable for indoor use. Unprotected outdoor use is not permitted. Contact with moisture must be avoided at all costs!

GENERAL FUNCTIONS

Single click:	Switching on or off
Click and hold:	Dimming 0 - 100%
Click and hold when switched off:	Night mode (5% brightness)

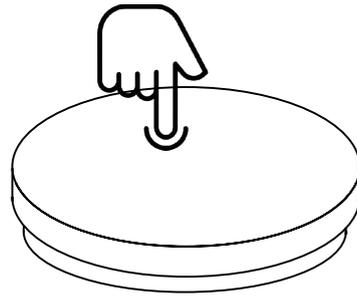


POSSIBLE COMBINATIONS

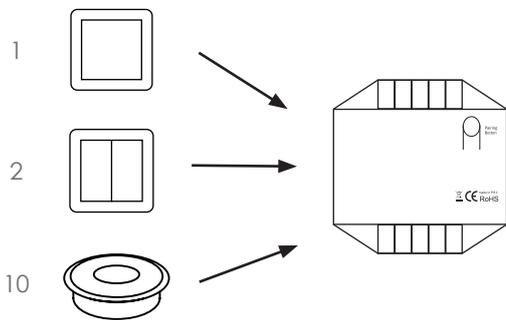

More controls on one receiver


a maximum of 10 PushPower control units (sensors, push buttons, etc.) can be connected to one receiver.

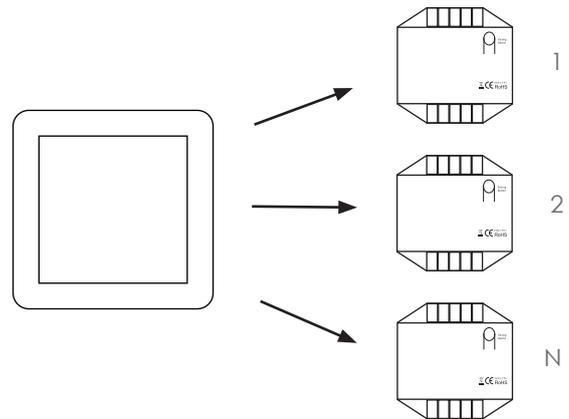

One control on several receivers

1 PushPower control unit can control any number of receivers to control.

CONNECTING THE CONTROL UNIT & RECEIVER

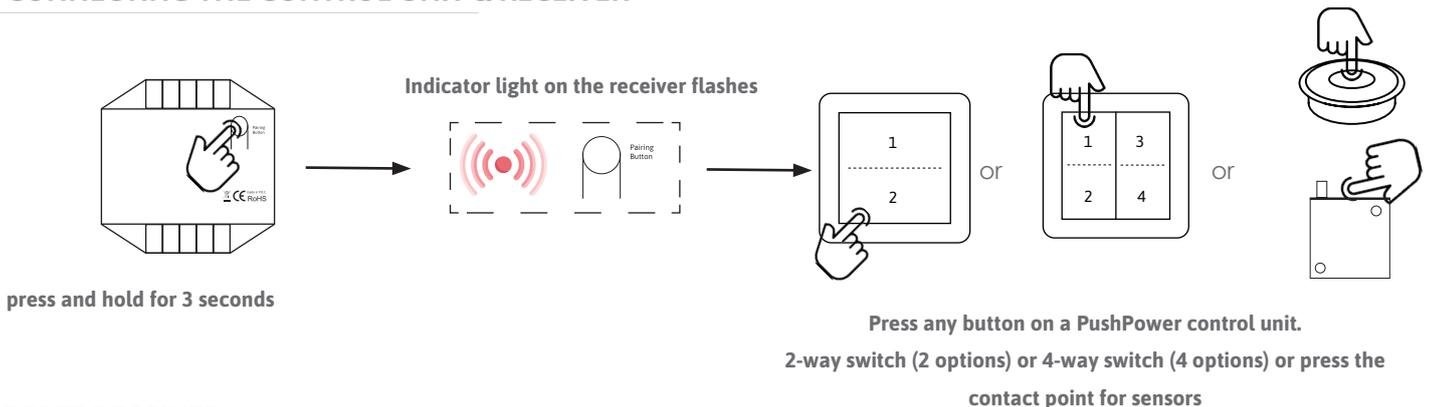

RESET RECEIVER

