


Fitting for 2 top-running glass doors with aluminum frame up to 26 kg (57 lbs.), with groove mounted running track. With soft and self closing mechanism. Design Inside.

Product highlights


- Comfort** Quiet, smooth running and soft and self closing system for different door weights
- Productivity** No groove in the base and invisible technology

Technical specifications

- Max. 26 kg (57 lbs.)
- Max. 2000 mm (6'6 3/4")
- Max. 800 mm (2'7 15/32")
- 4 mm (5/32)
Frame: 20 mm (25/32")

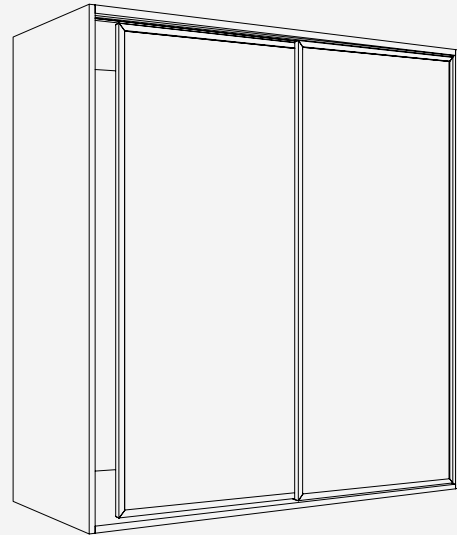


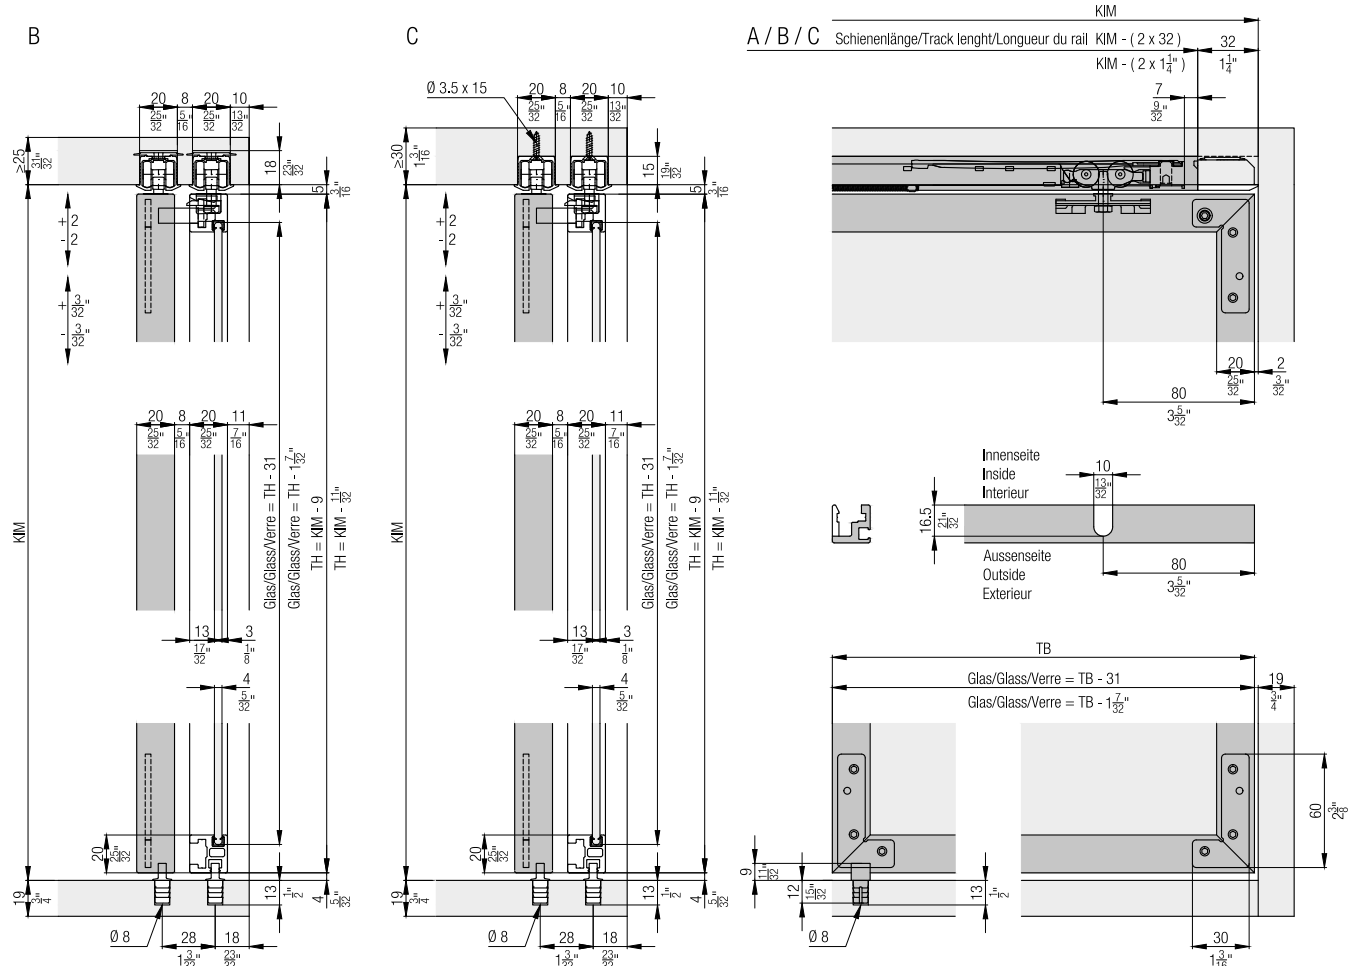




Installation examples






Set for 2 glass doors up to 26 kg (57 lbs.), with height adjustment

	No.
Hawa Clipo 26 GR IS, for 2 doors	053.3360.071


Set consisting of:

		053.3360.071	No.
	Running gear	4	053.3345.071
	Stopper, plastic, gray	4	057.3148.071
	Corner connector left, steel, zinc-plated	4	040.3054.171
	Corner connector right, steel, zinc-plated	4	040.3054.172
	Door follower	1	053.3350.071
	Hawa Clipo 16 H bottom guide, plastic, anthracite	2	053.3214.001

Glass frame profiles




		mm (inch)	No.
	Glass frame profile, above/lateral, aluminum, anodized	2,500 (8' 2 7/16")	040.3045.250
		3,500 (11' 5 25/32")	040.3045.350
		6,000 (19' 8 7/32")	040.3045.600
	Glass frame profile, bottom, aluminum, anodized	2,500 (8' 2 7/16")	040.3046.250
		3,500 (11' 5 25/32")	040.3046.350
		6,000 (19' 8 7/32")	040.3046.600
	Sealing profile, plastic, gray	2,500 (8' 2 7/16")	040.3061.250

Running tracks

		mm (inch)	No.
	A: Single running track, for glue fixing, aluminum, anodized	2,500 (8' 2 7/16")	053.3324.250
		3,500 (11' 5 25/32")	053.3324.350
		6,000 (19' 8 7/32")	053.3324.600
	B: Single running track, swivel lug, aluminum, anodized (not for hard wood/MDF)	2,500 (8' 2 7/16")	053.3327.250
		3,500 (11' 5 25/32")	053.3327.350
		6,000 (19' 8 7/32")	053.3327.600
	C: Single running track, for screw fixing, aluminum, anodized	2,500 (8' 2 7/16")	053.3325.250
		3,500 (11' 5 25/32")	053.3325.350
		6,000 (19' 8 7/32")	053.3325.600

Track end piece set for single running tracks





		No.
Track-end section, for screw fixing, plastic, gray, 2-piece set		053.3354.071
Track-end section, swivel lug, plastic, gray, 2-piece set		053.3355.051

		053.3354.071	053.3355.051	No.
Set consisting of:				
	Track-end piece, for screw fixing, plastic	2		053.0334.001
	Chipboard screw, 4x12 mm (5/32"x15/32"), steel, zinc-plated	2		600.0000.704
	Track-end piece, with swivel lug, plastic		2	053.3351.071




Soft close up to 15/26 kg (33/57 lbs.)

	No.
Soft close, up to 15 kg (33 lbs.)	057.3159.071
Soft close, up to 26 kg (57 lbs.)	057.3159.072



Set consisting of:

		057.3159.071	057.3159.072	No.
	Soft close, up to 15 kg (33 lbs.)	2		057.3156.071
	Release piece soft close	2	2	057.0182.101
	Thread rolling rounded head screw, M2.5x5 mm (3/32"x3/16"), steel, zinc-plated	2	2	600.0000.764
	Soft close, up to 26 kg (57 lbs.)		2	057.3156.072


Handles

		No.
	Handle, for glue fixing, 64 mm (2 17/32"), plastic, chrome-plated, matt, 2-piece set	053.3323.971
	Finger-pull-handle, for glue fixing, 30 mm (1 3/16"), aluminum, anodized, 2-piece set	053.3091.982
	Finger-pull-handle, for glue fixing, 30 mm (1 3/16"), aluminum, anodized, 50-piece set	053.3091.983
	Finger-pull-handle, for glue fixing, 40 mm (1 9/16"), aluminum, anodized	053.3158.901



Accessories

		No.
	Milling template Hawa Clipo 26 GR/Hawa Regal C 26 GR	040.3160.071
	Track cleaner, plastic, red	040.3142.071


Calculations

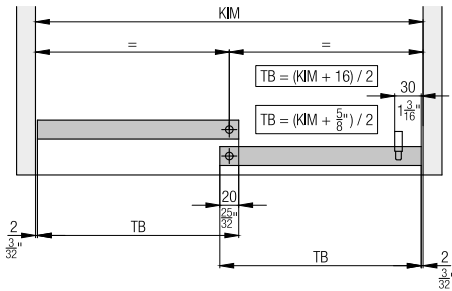

Frame processing




Soft close



	Z ≥	
	1	2
Hawa Porta 40 H	1' 4 17/32	2' 0 13/32
Hawa Porta 40 GE	1' 2 13/16	1' 10 11/16
Hawa Clipo 26 H IS	1' 4 17/32	2' 0 13/32
Hawa Clipo 26 H MS	1' 6 1/32	2' 1 29/32
Hawa Clipo 36 H IS	1' 4 17/32	2' 0 13/32
Hawa Clipo 36 H MS	1' 6 1/32	2' 1 29/32
Hawa Clipo 36 HM IS	1' 4 17/32	2' 0 13/32
Hawa Clipo 26 GR IS	1' 4 17/32	2' 0 13/32
Hawa Clipo 36 G IS	1' 4 17/32	2' 0 13/32
Hawa Clipo 36 GPK IS	1' 4 17/32	2' 0 13/32
Hawa Clipo 36 GPPK IS	1' 4 17/32	2' 0 13/32
Hawa Regal C 26 HM IS	1' 4 17/32	2' 0 13/32
Hawa Regal C 26 GR IS	1' 3 3/4	1' 11 5/8

	Z ≥	
	1	2
Hawa Porta 40 H	420	620
Hawa Porta 40 GE	376	576
Hawa Clipo 26 H IS	420	620
Hawa Clipo 26 H MS	458	658
Hawa Clipo 36 H IS	420	620
Hawa Clipo 36 H MS	458	658
Hawa Clipo 36 HM IS	420	620
Hawa Clipo 26 GR IS	420	620
Hawa Clipo 36 G IS	420	620
Hawa Clipo 36 GPK IS	420	620
Hawa Clipo 36 GPPK IS	420	620
Hawa Regal C 26 HM IS	420	620
Hawa Regal C 26 GR IS	400	600

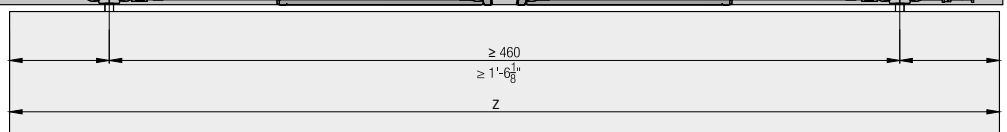

Accessories

– Glass recommendations from page 249

Planning/execution

Further information about the product can be found on www.hawa.com.