


SL-PPDOOR01K60

Sensor for hinged doors and drawers

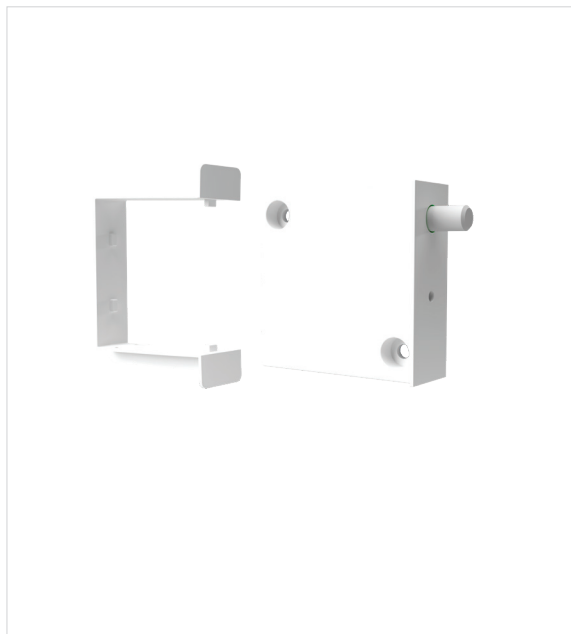

PRODUCT FEATURES

- ▶ Sensor for hinged doors and drawers
- ▶ For milling in, screwing on or gluing on.
- ▶ No battery and no wiring necessary!
- ▶ Battery-free device without external power supply.
- ▶ Transmission energy is generated from mechanical energy when the sensor contact point is actuated.
- ▶ Radio-based range up to 80 meters
- ▶ Sensor can be connected to any number of Push Power Receivers.
- ▶ Functions: ON - OFF for MONO and DUO receivers
- ▶ Can be combined with several sensors or switches
- ▶ Available in white (K60) and black (K1) versions

ASSEMBLY

- ▶ Milling in, screwing on or gluing on Placing the sensor on the door fitting side is recommended
- ▶ When milling, please refer to the technical milling diagram!
Milling depth: 46.5 mm
Milling height: 12.0 mm
Milling width: 55,0 mm

DIMENSIONS

- ▶ Sensor incl. adapter (LxDxH): 55 x 46 x 12 mm
- ▶ Sensor without adapter (LxWxH): 44 x 44 x 12 mm





TECHNICAL FEATURES

- ▶ Transfer protocol: RF 433 mhz
- ▶ Range (without mesh): 30 meters (indoors)
- ▶ IP Rating: IP20

SAFETY AND INSTALLATION INSTRUCTIONS


- ▶ This product is not a toy and is not suitable for children!
- ▶ The SIRO LED system is only suitable for indoor use. Unprotected outdoor use is not permitted. Contact with moisture must be avoided at all costs!

TECHNICAL MILLING DRAWING

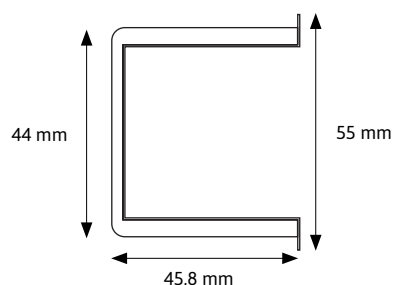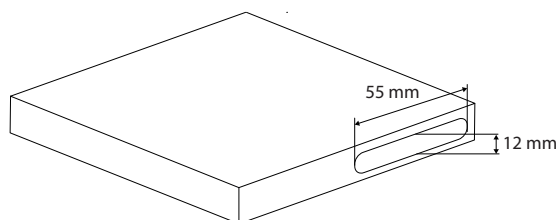
**RoHS** Must not be disposed of with household waste.
Must not be disposed of in household waste.SIRO fittings and metal
goods factory
Spiefeldstrasse 12
4452 Ternberg, AustriaTel . +43 (0)7256.6020.0
Fax . +43 (0)7256.8932
E-mail office@siro.at
Web . www.siro.at© 2023 All rights
reserved. All rights
reserved

GENERAL FUNCTIONS Single click:

Switching on or off

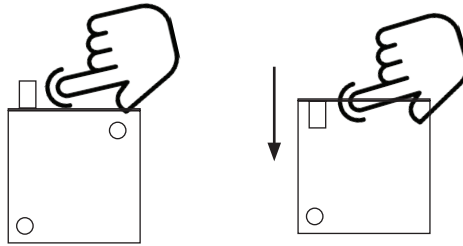

POSSIBLE COMBINATIONS

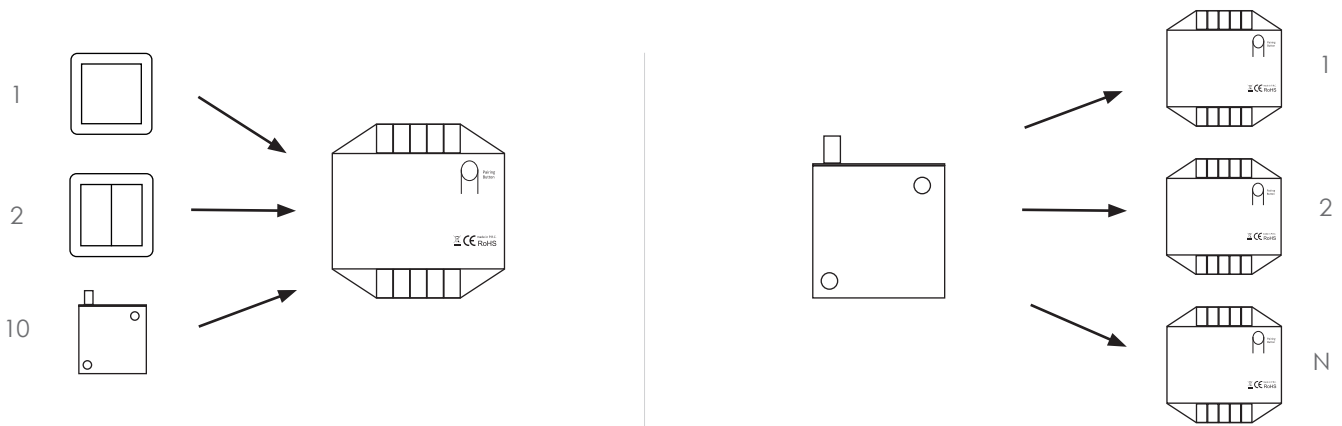


More controls on one receiver

a maximum of 10 PushPower control units (sensors, push buttons, etc.) can be connected to one receiver.


One control on several receivers

1 PushPower control unit can control any number of receivers to control.

CONNECTING THE CONTROL UNIT & RECEIVER

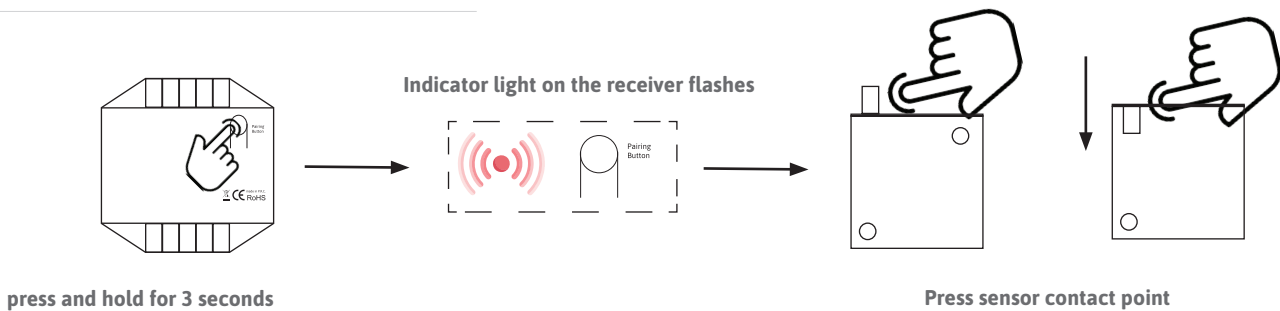

RESET RECEIVER

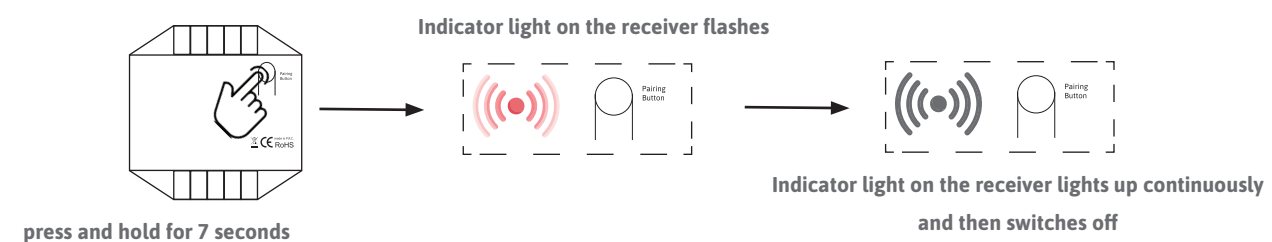

RoHS 

Must not be disposed of with household waste.
Must not be disposed of in household waste.

SIRO fittings and metal goods factory
Spielfeldstrasse 12
4452 Ternberg, Austria

Tel . +43 (0)7256.6020.0
Fax . +43 (0)7256.8932
E-mail office@siro.at
Web . www.siro.at

© 2023 All rights reserved.
All rights reserved