



# INSET DOOR PIVOT HINGE



PP

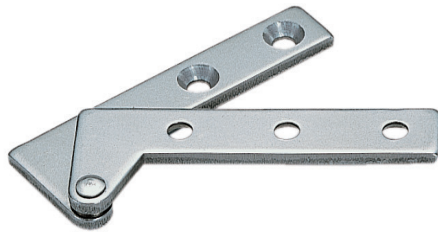

Left handed model shown.

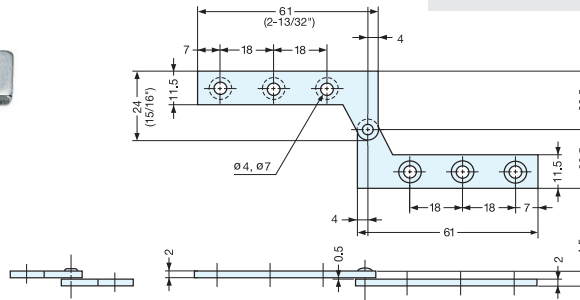

Right handed model shown.


- Door Size: Max. W450 × H700 mm (W17-3/4" × H27-9/16")
- Door Weight: Max. 2.6 kg/pair (5.7 lbs/pair)

Item No.		Weight (g)	Box (pcs)	Carton (pcs)	Material	Finish
Left	Right					
PP-L	PP-R	22	100	1000	430 Stainless Steel	Plain



# INSET DOOR PIVOT HINGE



PH

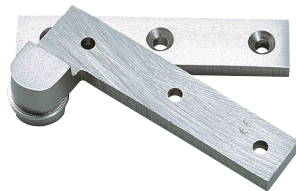


Left handed model shown.

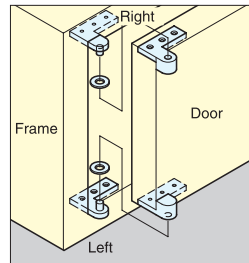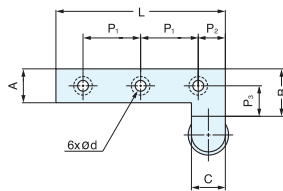

Installation

- Door Size: Max. W450 × H700 mm (W17-3/4" × H27-9/16")
- Recommended Door Thickness:
  - PH-50 : Min. 14 mm (9/16")
  - PH-60 : Min. 16 mm (10/16")
  - PH-80 : Min. 20 mm (3/4")
  - PH-95 : Min. 28 mm (1-1/8")
- Door Weight:
  - PH-50, 60: Max. 2.6 kg/pair (5.7 lbs/pair)
  - PH-80, 95: Max. 4 kg/pair (8.8 lbs/pair)

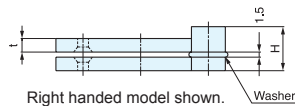

Right handed model shown.

Material	Finish
Brass	Satin Nickel

Item No.	L	t	H	A	B	C	P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>	d	Door Thickness (mm)	Weight (g)	Box (pcs)	Carton (pcs)	Screws
PH-50	50	4.0	13	10	14	10	17	8.0	9.0	3.2	14 (35/64")	40	10	20	3.1 × 20
PH-60	60	4.5		12	16	12	21	9.0			16 ( 5/8" )				
PH-80	80	6.0	22	16	20	15	30	10.0	12.0	4.2	20 (25/32")	170	8	32	3.8 × 25
PH-95	95	6.5		19	28	16	35	12.5			18.5				



# INSET DOOR PIVOT HINGE



PAW



Left handed model shown.

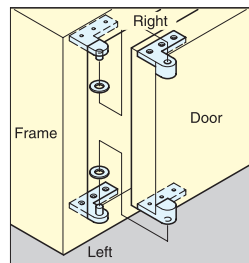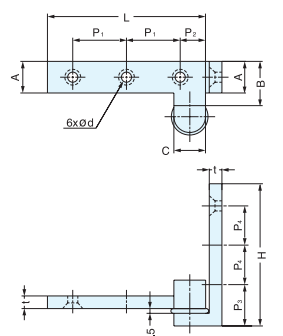

Installation

- Door Size: Max. W450 × H700 mm (W17-3/4" × H27-9/16")
- Recommended Door Thickness:
  - PAW-50 : 14 mm (9/16")
  - PAW-60 : 16 mm (10/16")
  - PAW-80 : 20 mm (3/4")
  - PAW-95 : 28 mm (1-1/8")
- Door Weight:
  - PAW-50, 60: Max. 2.6 kg/pair (5.7 lbs/pair)
  - PAW-80, 95: Max. 4 kg/pair (8.8 lbs/pair)

Material	Finish
Brass	Satin Nickel

Item No.	L	t	H	A	B	C	P <sub>1</sub>	P <sub>2</sub>	P <sub>3</sub>	P <sub>4</sub>	d	Door Thickness (mm)	Weight (g)	Box (set)	Carton (set)	Screws
PAW-50	50	4.0	45	10	14	10	17	8.0	13.0	12.5	3.2	14 (35/64")	43	10	200	3.1 × 20
PAW-60	60	4.5	50	12	16	12	21	9.0	12.5	15.5		16 ( 5/8" )				
PAW-80	80	6.0	70	16	20	15	30	10.0	15.0	23.0	4.2	20 (25/32")	172	8	32	3.8 × 25
PAW-95	95	6.5	80	19	28	16	35	12.5	18.0	25.5		28 (1-3/32")				