


Fitting for top-running wooden doors up to 160 kg (352 lbs.), with surface mounted running track. Ceiling mounting.

Product highlights


-  **Comfort** High quality, long-lasting friction bearing for quiet, smooth running, even with heavier weights
-  **Flexibility** Steel suspension bracket for screw fixing or welding

Technical specifications

-  Max. 160 kg (352 lbs.)
-  Max. 4000 mm (13'1 15/32")
-  Max. 3000 mm (9'10 1/8")
-  35–80 mm (1 3/8" to 3 5/32")

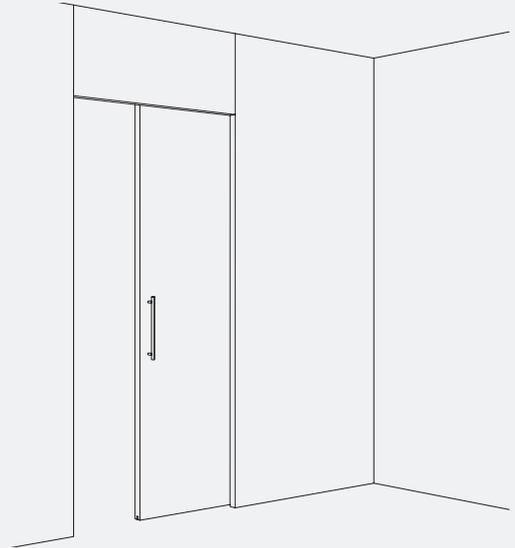


Installation examples

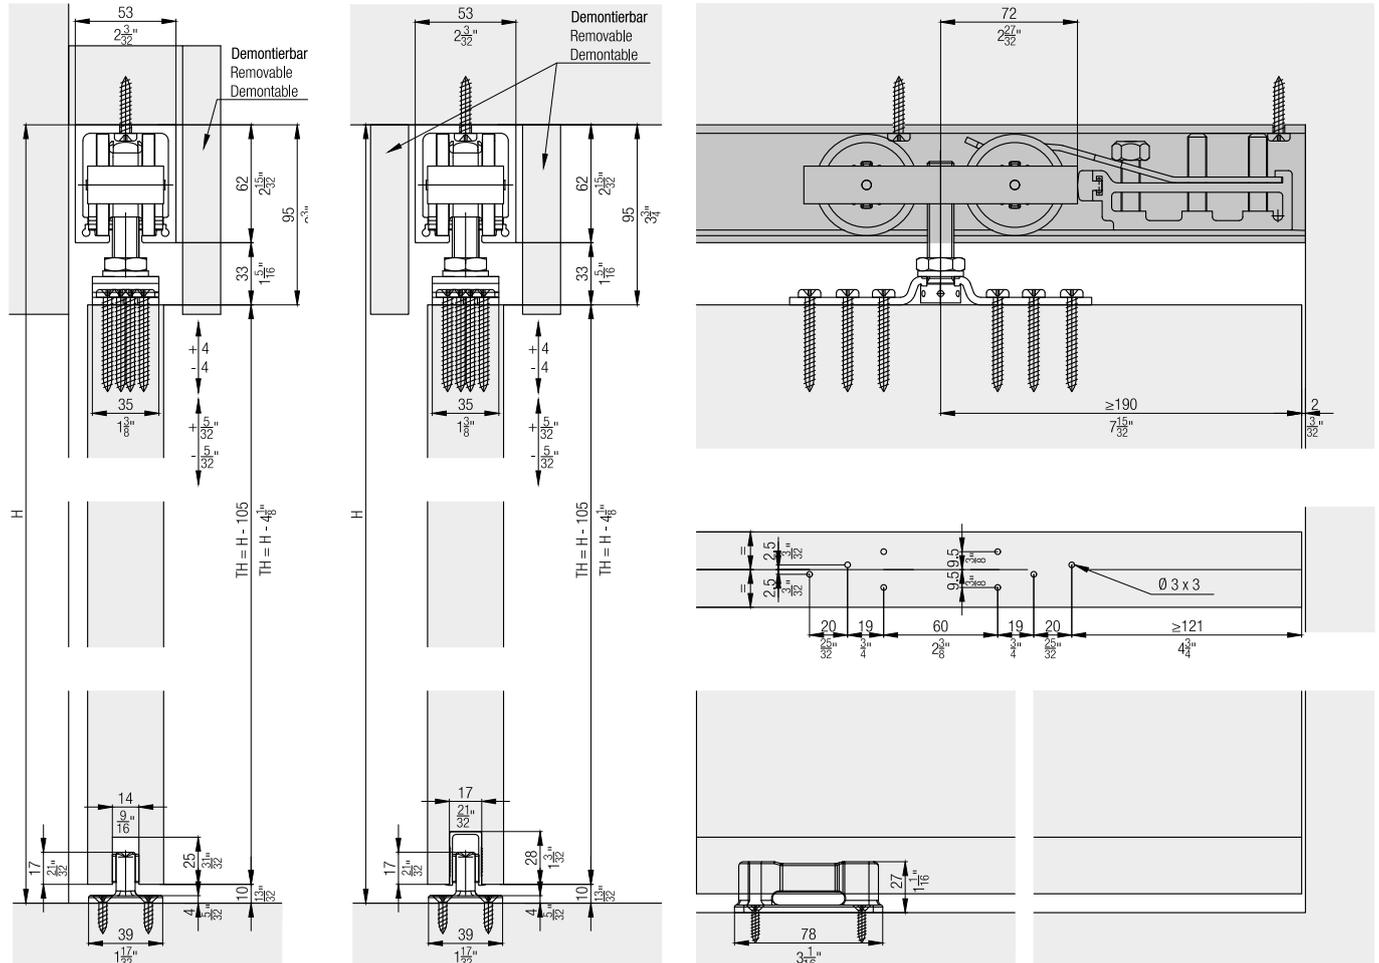

Set for 1 wooden door up to 160 kg (352 lbs.)

	No.
Hawa Junior 160 A, for 1 door	11703
Hawa Junior 160 A, with 2 track stoppers, for 1 door	26043


Set consisting of:

	11703	26043	No.
 Running gear, 2-wheeled, M14, plastic wheels	2	2	10416
 Stopper, with adjustable retention spring	1	2	10639
 Top fixing plate, with suspension bolt M14 and fixing screws	2	2	10478
 Bottom guide, zero tolerance, groove width 14 mm (9/16"), plastic	1	1	14711
 Rubber buffer, 29x11 mm (1 5/32"x7/16"), for screw fixing	1	1	13114

Running tracks

	mm (inch)	No.
	3,000 (9' 10 1/8 ")	24608
	4,000 (13' 1 15/32")	24607
	5,000 (16' 4 27/32")	24606
	6,000 (19' 8 7/32")	24605
	cut to size	24609

Guide tracks


	mm (inch)	No.
 Guide track, for groove mounting, plastic, 5-piece set	3,000 (9' 10 1/8 ")	14963

Accessories

	No.
 Bottom door stopper, with centering, stainless steel look	21473
 Bottom door stopper, with centering, chrome-plated, matt	20773
 Connecting pins to profiles, 2-piece set	21347

Hawa Confort 160

The convenient solution to an old problem. Inadequate fastening options in brittle sub-floors or in the area of floor heating. This bottom guide is mounted on the wall.

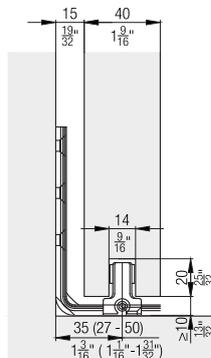

Accessories

- Hawa Junior bottom guides for wall mounting from page 508
- Lock solutions from page 511
- General accessories from page 518

Planning/execution

Further information about the product can be found on www.hawa.com.