

Product highlights

Fitting for 1-2 top-running glass doors up to 36 kg (79 lbs.), with screwed on or groove mounted running track. With soft and self closing mechanism. Design Inslide.

🖓 Comfort	Quiet, smooth running and soft and self closing system for different door weights
Productivity	Easy installation with tool-less clip-on system and convenient height adjustment
Technical specifica	itions
	36 kg (79 lbs.)
, ↓ Max.	2000 mm (6'6 3/4'')
<u>←</u> → Max.	1000 mm (3'3 3/8'')
→[]← 6	5–8 mm (1/4'' to 5/16'')
Installation examp	es
★ Zentrierhilfe für 6mm Glas	



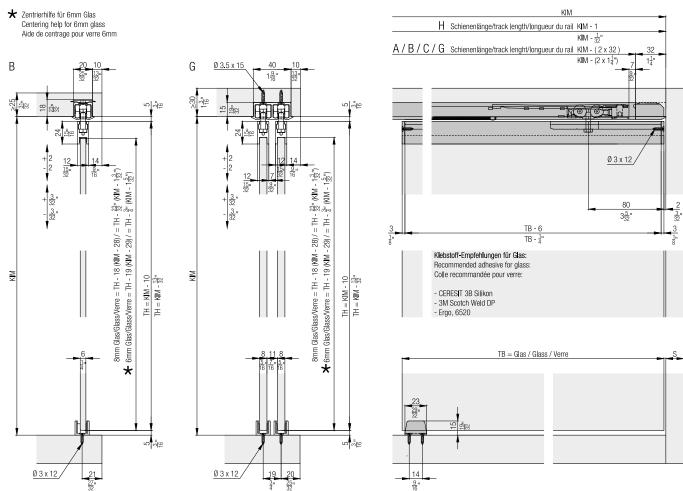

٦

Г

Set for 1 glass door up to 36 kg (79 lbs.), with height adjustment

		No.	
Hawa Clipo 36 GPK, for 1 door		053.3361.071	
Set consisting	of:	053.3361.071	No.
	Running gear	2	053.3344.071
El S	Flat countersunk head chipboard screw, 3x12 mm (1/8 "x 15/32"), steel, zinc-plated, black	2	600.0000.703
	Stopper, plastic, gray	2	057.3148.071
	Centring help, for 6 mm (1/4") glass	2	053.3139.001
Ø	Bottom guide glass, playfree, chrome-plated, matt	1	053.3097.901
	Slider bottom guide, plastic, grey, 4-piece set	1	053.0146.001
LI So	Flat countersunk head chipboard screw, 3x12 mm (1/8"x15/32"), steel, zinc-plated	2	766.5030.112

Running tracks

		mm (inch)	No.
		2,500 (8' 2 7/16'')	053.3324.250
6	A: Single running track, for glue fixing, aluminum, anodized	3,500 (11' 5 25/32'')	053.3324.350
- æ		6,000 (19' 8 7/32'')	053.3324.600
	B: Single running	2,500 (8' 2 7/16'')	053.3327.250
C.	track, swivel lug, aluminum, anodized (not for hard wood/	3,500 (11' 5 25/32'')	053.3327.350
	MDF)	6,000 (19' 8 7/32'')	053.3327.600
	C: Single running	2,500 (8' 2 7/16'')	053.3325.250
*	track, for screw fixing, aluminum, anodized	3,500 (11' 5 25/32'')	053.3325.350
		6,000 (19' 8 7/32'')	053.3325.600
**	G: Double running track, for screw fixing, aluminum, anodized	2,500 (8' 2 7/16'')	053.3342.250
	D: Double running track, for screw	3,500 (11' 5 25/32'')	053.3342.350
	fixing, aluminum, anodized	6,000 (19' 8 7/32'')	053.3342.600
	H: Single running track, for screw fixing, aluminum,	2,500 (8' 2 7/16'')	053.3326.250
		3,500 (11' 5 25/32'')	053.3326.350
	anodized	6,000 (19' 8 7/32'')	053.3326.600

Suspension and glass retaining profiles

		mm (inch)	No.
111		2,500 (8' 2 7/16'')	053.3072.250
	Glass fixing profile, aluminum, anodized	3,500 (11' 5 25/32'')	053.3072.350
		6,000 (19' 8 7/32'')	053.3072.600

Adhesive

	No.
Glue Ceresit 3B Silicone, 310 ml	098.0027.000



Track end piece set for single running tracks

				No.
Track-end section 2-piece set	on, for screw fixing, plastic,	gra	y,	053.3354.071
Track-end section 2-piece set	on, swivel lug, plastic, gray,			053.3355.051
Set consisting	of:	053.3354.071	053.3355.051	No.
	Track-end piece, for screw fixing, plastic	2		053.0334.001
S.	Chipboard screw, 4x12 mm (5/32"x15/32"), steel, zinc-plated	2		600.0000.704
	Track-end piece, with swivel lug, plastic		2	053.3351.071

Track end piece set for double running tracks

				No.
	Track-end section, double track, swivel lug, plastic, gray, 2-piece set		053.3362.051	
Track-end section 2-piece set	on, double track, plastic, gr	ey,		053.3365.071
Set consisting	of:	053.3362.051	053.3365.071	No.
	Track-end piece, double running track, with swivel lug, plastic	2		053.3352.071
A CONTRACTOR	Track-end piece, Double running track, for screw fixing, plastic		2	053.0335.001
XI So	Chipboard screw, 4x12 mm (5/32"x15/32"), steel, zinc-plated		4	600.0000.704

Г

Soft close up to 15/26/36 kg (33/57/79 lbs.)

	No.
Soft close, up to 15 kg (33 lbs.)	057.3159.071
Soft close, up to 26 kg (57 lbs.)	057.3159.072
Soft close, up to 40 kg (88 lbs.)	057.3159.073

Set consisting	of:	057.3159.071	057.3159.072	057.3159.073	No.
Sec. 1	Soft close, up to 15 kg (33 lbs.)	2			057.3156.071
	Release piece soft close	2	2	2	057.0182.101
×12	Thread rolling rounded head screw, M2.5x5 mm (3/32"x3/16"), steel, zinc-plated	2	2	2	600.0000.764
Contraction of the second	Soft close, up to 26 kg (57 lbs.)		2		057.3156.072
10 million and a second	Soft close, up to 40 kg (88 lbs.)			2	057.3156.073

Handles


		No.
Ĩ	Handle, for glue fixing, 64 mm (2 17/32"), plastic, chrome-plated, matt, 2-piece set	053.3323.971
	Finger-pull-handle, for glue fixing, 30 mm (1 3/16''), aluminum, anodized, 2-piece set	053.3091.982
	Finger-pull-handle, for glue fixing, 30 mm (1 3/16''), aluminum, anodized, 50-piece set	053.3091.983
\bigcirc	Finger-pull-handle, for glue fixing, 40 mm (1 9/16''), aluminum, anodized	053.3158.901


Г


Accessories

 	No.
Track cleaner, plastic, red	040.3142.071

Further installation examples

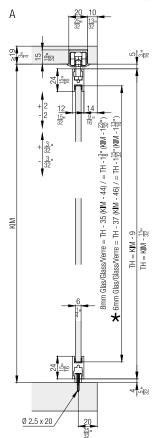


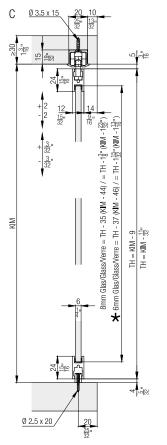

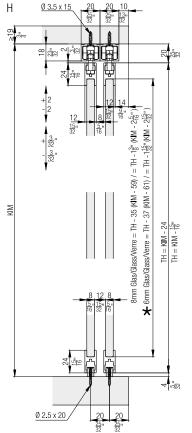


★ Zentrierhilfe für 6mm Glas Centering help for 6mm glass Aide de centrage pour verre 6mm

Calculations



Locking systems

Details from page 242 onwards



Hawa Clipo 36 GPK IS

Soft close

	Z≥ 2 1 2	≥ 260 $\geq 10^{1/4}_{1}$
Hawa Porta 40 H	$1' 4\frac{17}{32}"$ $2' 0\frac{13}{32}"$	Z
Hawa Porta 40 GE	1' $2\frac{13}{16}$ 1' $10\frac{11}{16}$	
Hawa Clipo 26 H IS	1' 4 ¹⁷ / ₃₂ 2' 0 ¹³ / ₃₂	
Hawa Clipo 26 H MS	1'6 <u>1</u> " 2'1 <u>29</u> "	72
Hawa Clipo 36 H IS	$1' 4\frac{17}{32}" 2' 0\frac{13}{32}"$	
Hawa Clipo 36 H MS	1'6 <u>1</u> " 2'1 <u>29</u> "	Hawa Porta 40 H 420 620
Hawa Clipo 36 HM IS	1' 4 ¹⁷ " 2' 0 ¹³ "	Hawa Porta 40 GE 376 576 Hawa Clipo 26 H IS 420 620
Hawa Clipo 26 GR IS	1' 4 ¹⁷ / ₃₂ " 2' 0 ¹³ / ₃₂ "	Hawa Clipo 26 H MS 458 658
Hawa Clipo 36 G IS	1' 4 ¹⁷ " 2' 0 ¹³ / ₃₂ "	Hawa Clipo 36 H IS 420 620 Hawa Clipo 36 H MS 458 658
Hawa Clipo 36 GPK IS	1' 4 ¹⁷ / ₃₂ " 2' 0 ¹³ / ₃₂ "	Hawa Clipo 36 HM IS 420 620 Hawa Clipo 26 GR IS 420 620
Hawa Clipo 36 GPPK IS	$1' 4\frac{17}{32}"$ $2' 0\frac{13}{32}"$	Hawa Clipo 36 G IS 420 620
Hawa Regal C 26 HM IS	1' 4 ¹⁷ ₃₂ " 2' 0 ¹³ / ₃₂ "	Hawa Clipo 36 GPK IS 420 620 Hawa Clipo 36 GPPK IS 420 620
Hawa Regal C 26 GR IS	1' 3 ³ / ₄ 1' 11 ⁵ / ₈ "	Hawa Regal C 26 HM IS 420 620 Hawa Regal C 26 GR IS 400 600
		≥ 460 $\geq 1.6\frac{1}{9}$

Accessories

- Locking systems from page 242

- Glass recommendations from page 249

Planning/execution Further information about the product can be found on www.hawa.com.