







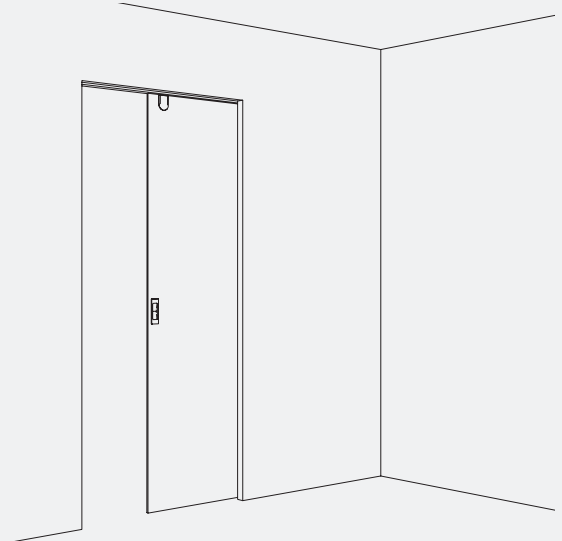
Fitting for top-running glass doors up to 120 kg (264 lbs.), with surface mounted running track or running track flush with the ceiling. Optionally with soft and self closing mechanism. Ceiling mounting. Minimal installation height. Wall pocket solution.

Product highlights


-  **Aesthetics** Cover caps in different design versions
-  **Productivity** Easy height adjustment via both suspensions on completely installed door

Technical specifications


-  Max. 120 kg (264 lbs.)
-  Max. 4000 mm (13'1 15/32")
-  Max. 1500 mm (4'11 1/16")
-  8–12.7 mm (5/16" to 1/2")



Installation examples

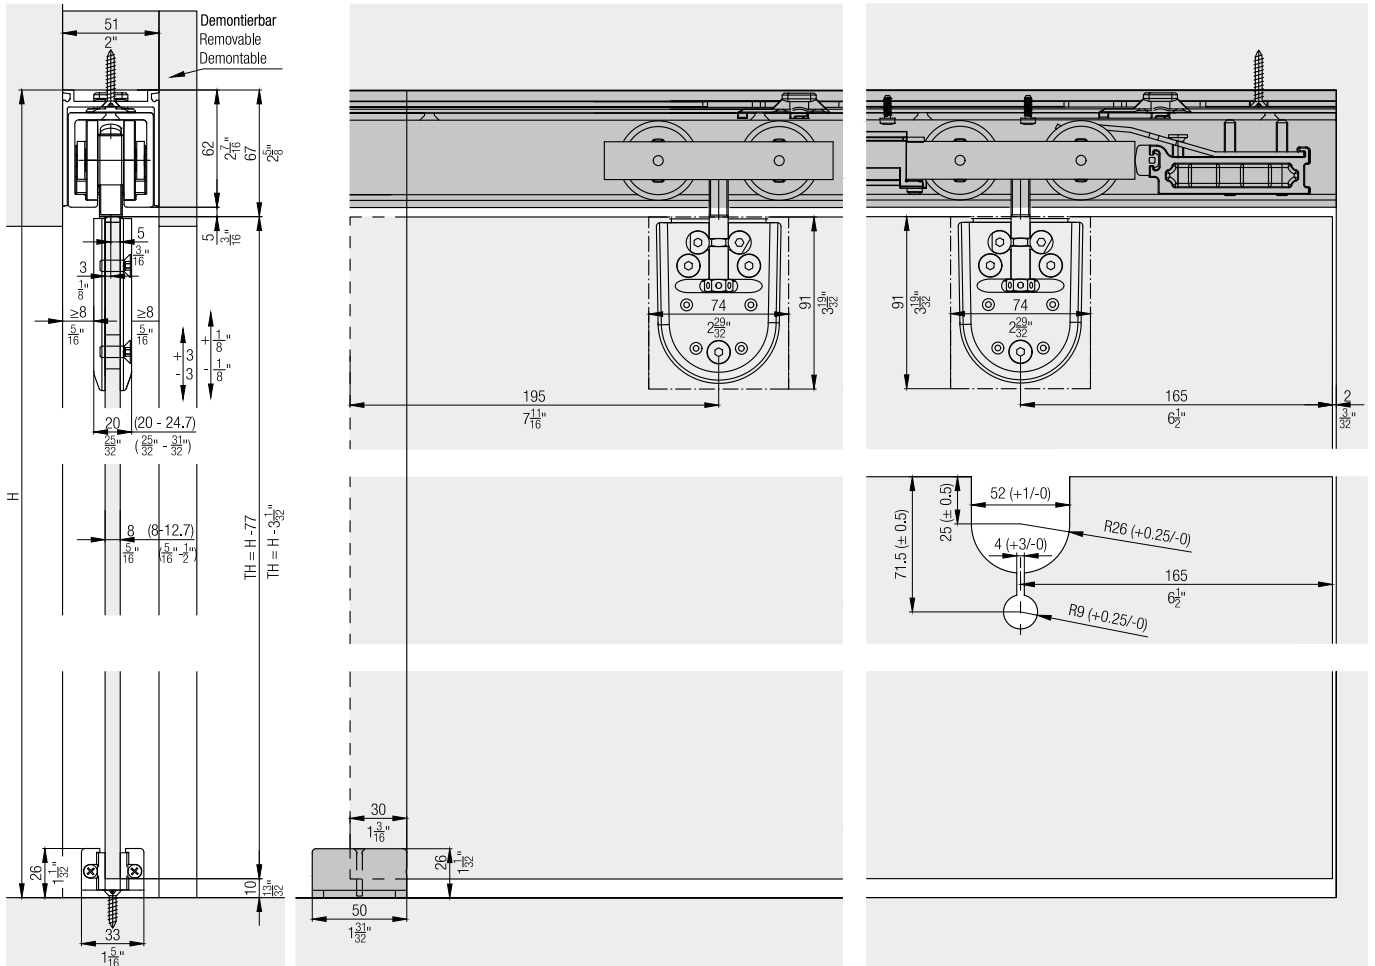





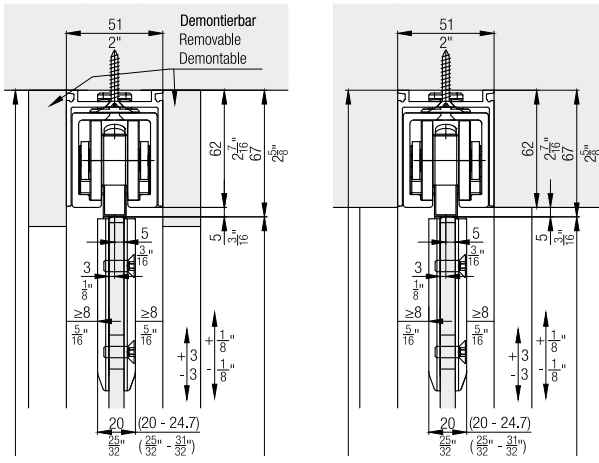


Further installation examples




Set for 1 glass door up to 120 kg (264 lbs.)

	No.
Hawa Junior 120 GP, for 1 door	25909













Set consisting of:

		25909	No.
	Two-wheeled running gear, M12, plastic wheels	2	25900
	Track stopper, with adjustable retention spring	2	14858
	Suspension bolt M12 and mounting screws	2	16019
	Patch suspension, with glass holder insert, without mounting screws	2	20505
	Screw-on rubber door stop	1	10629
	Single use drilling jig	1	20400
	Vertical adjustment pin	1	16329


Bottom guides

	No.
	Bottom guide, playfree adjustable, glass thickness 8–12.7 mm (5/16"–1/2"), chrome-plated, mat 057.3082.071

Cover caps

		No.
	Cover cap, rounded, plastic, chrome-plated, matt, 1 piece	16049
	Cover cap, rounded, plastic, chrome-plated, matt, 4-piece set	16042
	Cover cap, rounded, plastic, chromium finish polished, 1 piece	17161
	Cover cap, rounded, plastic, chromium finish polished, 4-piece set	17160
	Cover cap, rounded, plastic, stainless steel look, 1 piece	16051
	Cover cap, rounded, plastic, stainless steel look, 4-piece set	16044
	Cover cap, rounded, plastic, raw, 1 piece	15823
	Cover cap, square, plastic, chrome-plated, matt, 1 piece	19091
	Cover cap, square, plastic, chrome-plated, matt, 4-piece set	19092
	Cover cap, square, plastic, stainless steel look, 1 piece	19093
	Cover cap, square, plastic, stainless steel look, 4-piece set	19094
	Square cover plate, plastic, raw, 1 piece	19000





Running tracks

		mm (inch)	No.
	Running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	14866
		3,000 (9' 10 1/8 ")	14867
		cut to size	14871


Assembly set

	No.
Set for mountable and demountable running track, up to 2500 mm (8'2 7/16")	25994
Set for mountable and demountable running track, up to 3000 mm (9'10 1/8")	25996

Set consisting of:


	mm (inch)			No.
		25994	25996	
 Retainer profile with a bayonet lock, aluminum, anodized	2,535 (8' 3 13/16")	1		25915
 Small parts to retainer profile, 7-piece set		1		25993
 Retainer profile with a bayonet lock, aluminum, anodized	3,035 (9' 11 1/2 ")		1	25916
 Small parts to retainer profile, 9-piece set			1	25995

Panels



	mm (inch)	No.
 Clip-on panel, for fascia mounting, aluminum, anodized	2,000 (6' 6 3/4 ")	25986
	cut to size	27692

Soft close SoftMove 120




For soft closing in opening and closing direction order 2 sets.

	No.
 Soft close SoftMove 120	25988

Wall connection


		mm (inch)	No.
	Wall profile, aluminum, anodized	2,500 (8' 2 7/16")	17020
		3,500 (11' 5 25/32")	17021
	Wall profile, aluminum, stainless steel look, brushed	2,500 (8' 2 7/16")	20119
		3,500 (11' 5 25/32")	20120
	Seal profile, black, for wall profile	2,500 (8' 2 7/16")	16452
		3,500 (11' 5 25/32")	16453

Accessories

	No.
 Spring loaded door stop for door weight up to 120 kg	27202
 Centering assembly black, for all glass sliding doors, to wall profile	18663
 Centering assembly grey, for all glass sliding doors	18619


Wall connection

Optimal wall connection for all-glass sliding doors with unprotected glass edge.

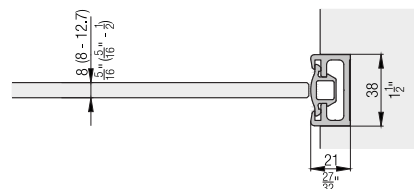

Calculations of running track length


The length of the running track must be shorter than the diagonal clearance (P2) by at least 100 mm (3 15/16").

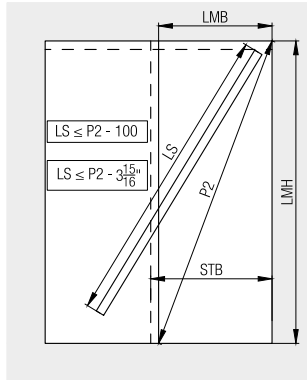

LMB = inside clearance
 LMH = inside height
 STB = sliding door width
 P2 = diagonal clearance
 LS = running track


Spring stop

The specially developed spring stop for ejecting the door is integrated into the running track without visible fittings on the door edge.

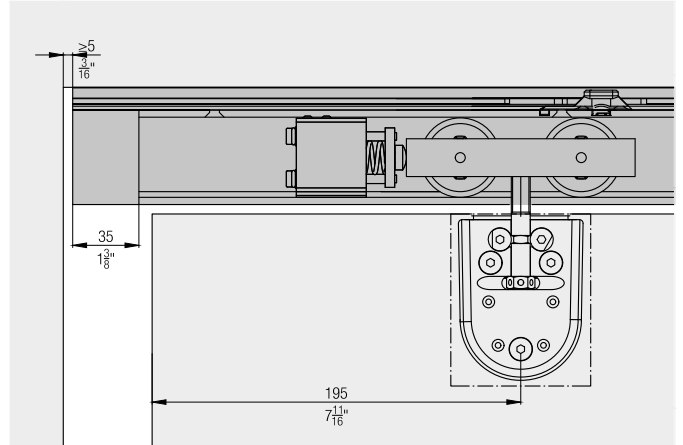


Detail rear door

Installation circumstances for bottom guide, rear suspension.

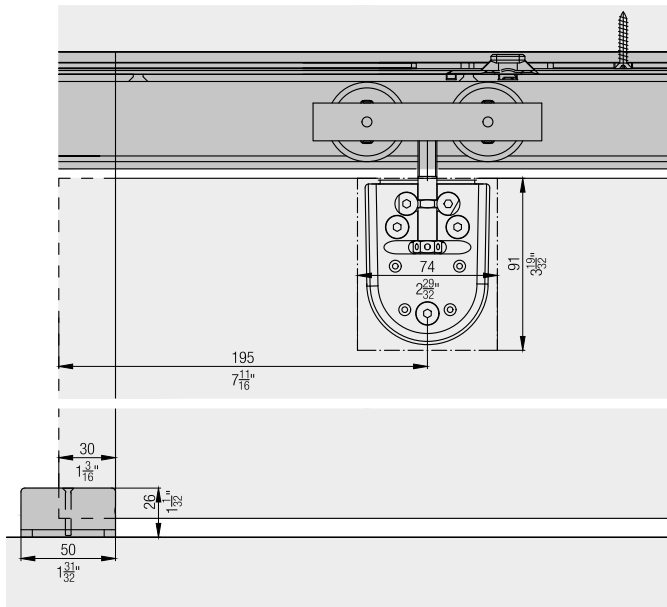



Facing for the retainer profile

The optional clip-on panel made of aluminum can be clipped onto the retainer profile without additional fixing components. For invisible fastening of the lintel panelling, there is the option of covering the clip panel on site, using panels up to 40 mm (1 9/16") thick.



SoftMove 120 soft closing mechanism

Completely integrated into the running track, the SoftMove decelerates sliding doors and draws them into their final position.

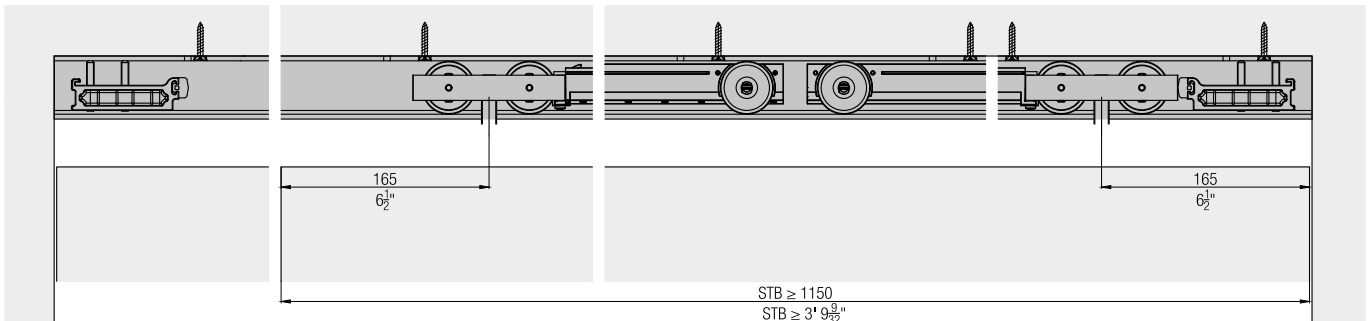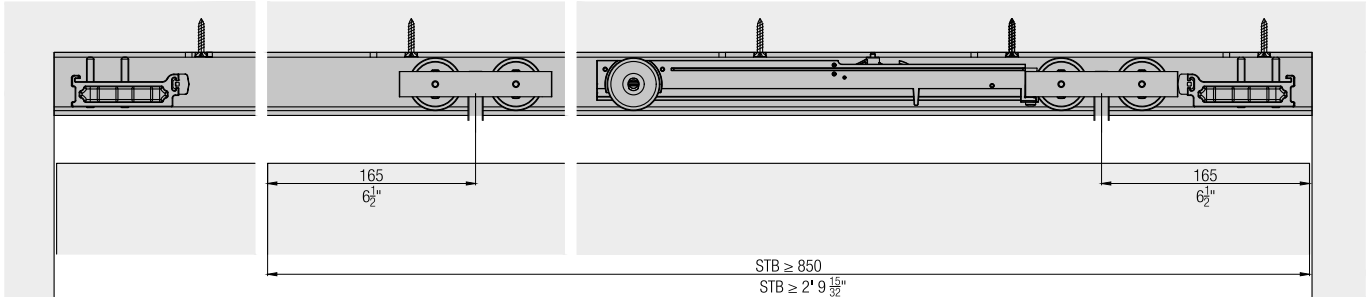

Accessories

- Lock solutions from page 511
- General accessories from page 518
- Glass recommendations from page 536

Planning/execution

Further information about the product can be found on www.hawa.com.