

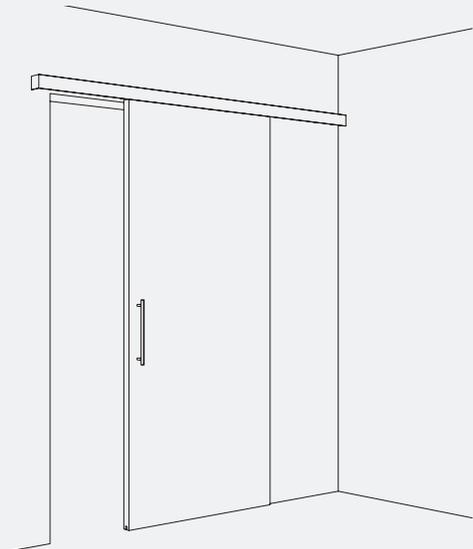
Fitting for top-running wooden doors up to 100 kg (220 lbs.), with surface mounted running track. Optionally with soft and self closing mechanism. Wall mounting.

Product highlights

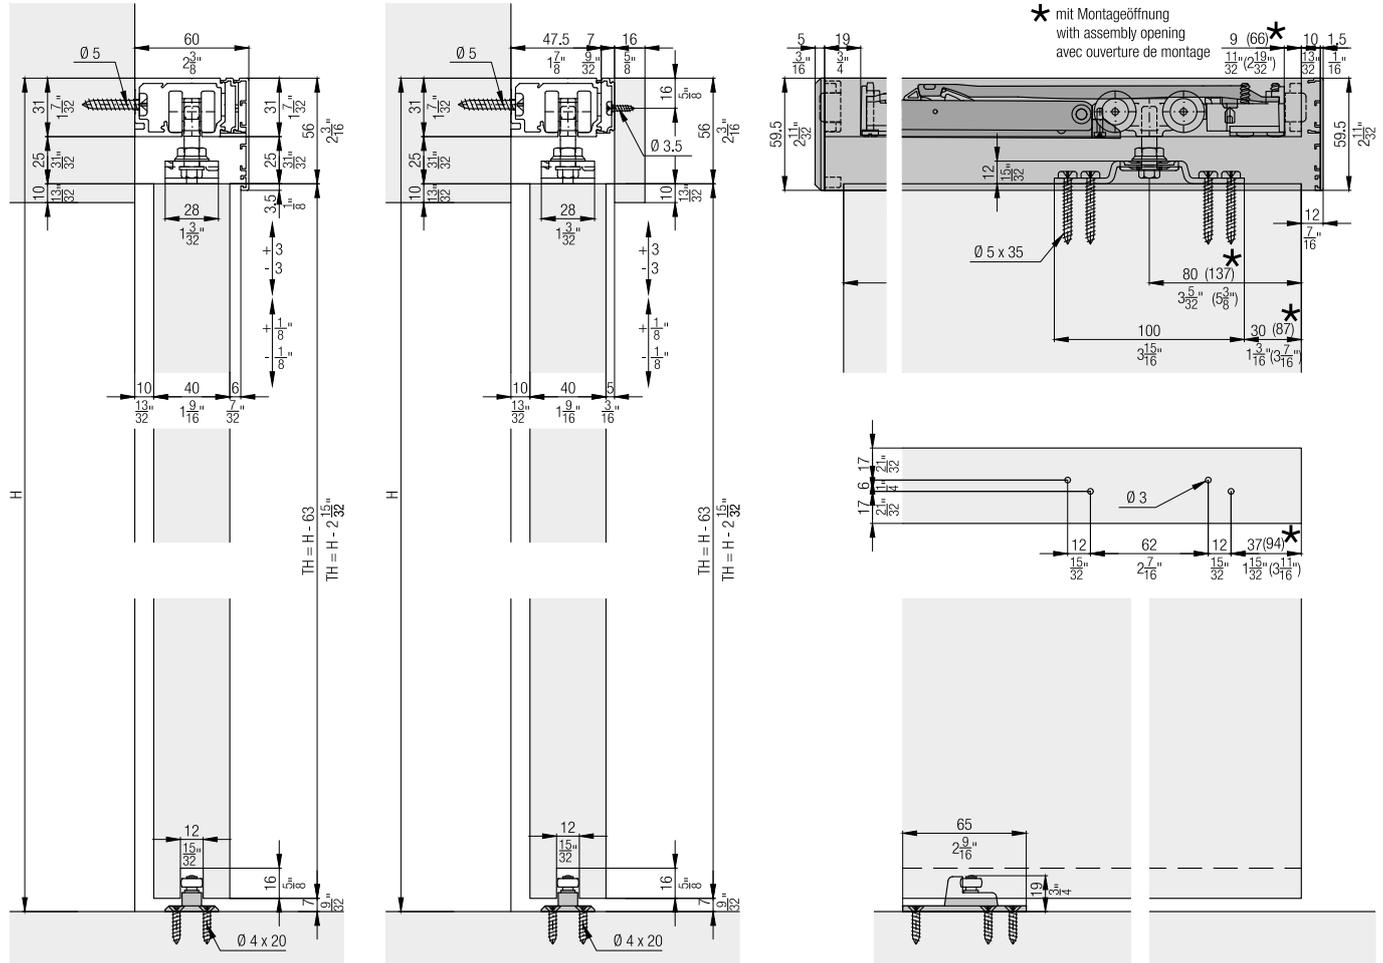
-  **Flexibility** Wall mounting with integrated clip-on panelling in wood or aluminium with stylish end pieces
-  **Productivity** Retrofitting of all components through the provided assembly opening, prevents contamination during construction
-  **Aesthetics** Also available in black as a "Black Edition" design option for a particularly attractive appearance

Technical specifications

-  Max. 100 kg (220 lbs.)
-  Max. 2700 mm (8' 10 5/16")
-  Max. 1600 mm (5' 3")
-  30–45 mm (1 3/16" to 1 25/32")





Installation examples







**Set for wall mounting,
for 1 wooden door up to 100 kg (220 lbs.)**

	No.
Hawa Porta/Divido 100 H/HC, for 1 door	057.3139.071
Hawa Porta 100 H/HC, black, for 1 door	057.3139.075




Set consisting of:	057.3139.071		057.3139.075		No.
	Running gear, ball bearing, rollers, plastic, white	2	2	057.3114.071	
	Stopper, with retention spring, plastic, gray	2		057.3073.072	
	Suspension bolt, M8x32 mm (5/16"x1 1/4"), steel, zinc-plated	2	2	057.0123.104	
	Hexagon locking nut, M8, steel, zinc-plated	2	2	768.9005.101	
	Support bracket, height and lateral adjustable, steel, zinc-plated	2	2	057.3129.101	
	Pan head screw, 5x35 mm (3/16"x1 3/8"), steel, zinc-plated	8	8	766.6051.135	
	Bottom guide, with roller, adjustable, plastic, anthracite	1	1	057.3120.071	
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	4		766.5042.120	
	Stopper, with retention spring, plastic, black		2	057.3073.076	
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated		4	600.0000.817	

**Set for wall mounting,
for 1 wooden door up to 100 kg (220 lbs.)**

	No.
Hawa Porta 100 HC, with running track and panel, 2000 mm (6' 6 3/4"), aluminum, anodized, for 1 door	057.3143.071

Set consisting of:		057.3143.071		No.
		mm (inch)		
	Running gear, ball bearing, rollers, plastic, white		2	057.3114.071
	Stopper, with retention spring, plastic, gray		2	057.3073.072
	Suspension bolt, M8x32 mm (5/16"x1 1/4"), steel, zinc-plated		2	057.0123.104
	Hexagon locking nut, M8, steel, zinc-plated		2	768.9005.101
	Support bracket, height and lateral adjustable, steel, zinc-plated		2	057.3129.101
	Pan head screw, 5x35 mm (3/16"x1 3/8"), steel, zinc-plated		8	766.6051.135
	Bottom guide, with roller, adjustable, plastic, anthracite		1	057.3120.071
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated		4	766.5042.120
	End cap, plastic, anthracite		1	057.3132.071
	Fixation clip for wooden and aluminum panel, 2-piece set		1	057.3126.071
	Clip component for wooden and aluminum panel, every 500 mm (1' 7 11/16"), aluminum, pre-drilled		5	057.3117.001
	Track cleaner, plastic, blue		1	057.3099.071
	Single running track, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	1	057.3112.199
	Clip-on panel, aluminum, anodized	2,000 (6' 6 3/4 ")	1	042.3004.199


Running tracks

		mm (inch)	No.
	Running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	057.3112.250
		3,500 (11' 5 25/32")	057.3112.350
		6,000 (19' 8 7/32")	057.3112.600
		cut to size	057.3112.990
	Running track, aluminum, black anodized, pre-drilled	2,500 (8' 2 7/16")	057.3112.255
		3,500 (11' 5 25/32")	057.3112.355
	Running track, extended spacing of +9 mm (11/32") between door and wall, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	30617
		6,000 (19' 8 7/32")	30618
		cut to size	30668
	Running track, extended spacing of +20 mm (25/32") between door and wall, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	30619
		6,000 (19' 8 7/32")	30620
		cut to size	30669

Panels

		mm (inch)	No.
	Clip-on panel, aluminum, anodized	2,500 (8' 2 7/16")	042.3004.250
		3,500 (11' 5 25/32")	042.3004.350
		6,000 (19' 8 7/32")	042.3004.600
		cut to size	042.3004.990
	Clip-on panel, aluminum, black anodized	2,500 (8' 2 7/16")	042.3004.255
		3,500 (11' 5 25/32")	042.3004.355

Clip-on components

		No.
	Clip component for wooden and aluminum panel, every 500 mm (1' 7 11/16"), aluminum, pre-drilled	057.3117.001
	Clip component for wooden and aluminum panel, every 500 mm (1' 7 11/16"), aluminum, black anodized, pre-drilled	057.3117.005

Fixing clamp for the end pieces of wooden or aluminum panels

		No.
Fixation clip for wooden and aluminum panel, 2-piece set		057.3126.071
		No.
Set consisting of:		
	Fixation clip for wooden and aluminum panel, steel, zinc-plated	2 057.3126.101

Panel end component set, 59 mm (2 5/16"), aluminum, for running track 057.3112.xxx

		No.
Panel end component set, with fixation clip, 59x60 mm (2 5/16x2 3/8"), aluminum, black anodized		042.3028.056
Panel end component set, with fixation clip, 59x60 mm (2 5/16x2 3/8"), aluminum, anodized		042.3028.076


		042.3028.056	042.3028.076	No.
	Panel end component, 59 mm (2 5/16"), aluminum, black anodized	1		042.3028.956
	Bracker connector, steel, zinc-plated	2	2	057.3051.101
	Fixation clip for wooden and aluminum panel, steel, zinc-plated	1	1	057.3126.101
	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	4	4	011.0101.171
	Panel end component, 59 mm (2 5/16"), aluminum, anodized		1	042.3028.906

Panel end component set, 79 mm (3 1/8"), can be shortened, aluminum, for running track 30617, 30618, 30619, 30620, 30668, 30669

		No.	
Panel end component set, with fixation clip, 59x60 mm (3 1/8x2 3/8"), aluminum, anodized		30593	
		30593	No.
Set consisting of:			
	Panel end component, 79 mm (3 1/8"), aluminum, anodized	1	30590
	Bracket connector, steel, zinc-plated	2	057.3051.101
	Fixation clip for wooden and aluminum panel, steel, zinc-plated	1	057.3126.101
	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	4	011.0101.171

End cap set for running track 057.3112.xxx

		No.	
End cap set, with fixation clip, plastic, anthracite		057.3132.072	

		No.	
		057.3132.072	No.
Set consisting of:			
	End cap, plastic, anthracite	1	057.3132.071
	Fixation clip for wooden and aluminum panel, steel, zinc-plated	2	057.3126.101

Soft close
For soft closing in opening and closing direction order 2 sets.

		No.	
Soft close Hawa Porta 100, Divido 100, 61-100 kg (133 to 220 lbs.), 1 piece		042.3102.071	
Soft close Hawa Porta 60/100, Divido 100, 10-60 kg (22 to 132 lbs.), 1 piece		042.3102.072	

		No.	
		042.3102.071	042.3102.072
Set consisting of:			
	Soft close, top running, 61-100 kg (133 to 220 lbs.), plastic	1	042.3106.071
	Trigger for soft close in buildings, zinc die casting	1	042.3105.001
	Screw set soft close	1	600.0000.566
	Soft close, top running, 10-60 kg (22 to 132 lbs.), plastic	1	042.3106.072

Cover for assembly opening


		No.	
Cover cap to assembly opening, 1-piece set		042.3114.071	

		No.	
		042.3114.071	No.
Set consisting of:			
	Cover cap assembly opening, plastic, gray	1	042.0172.001
	Screw set soft close	1	600.0000.566

Bottom guide set for wall mounting

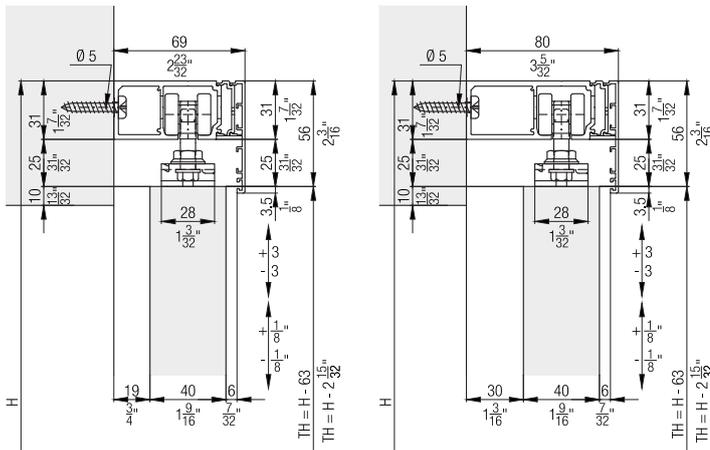
		No.	
		057.3128.171	
Set bottom guide for wall mounting, with roller		057.3128.171	

Accessories

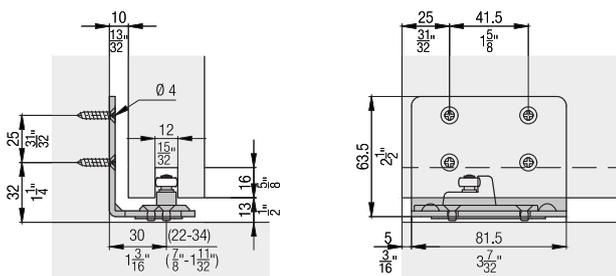
		No.
	Routing jig for assembly opening	042.3118.071
	Groove cutter to routing jig, Ø= 10 mm (13/32\"), hard metal	600.0000.309
	Track cleaner, plastic, blue	057.3099.071

Further installation examples

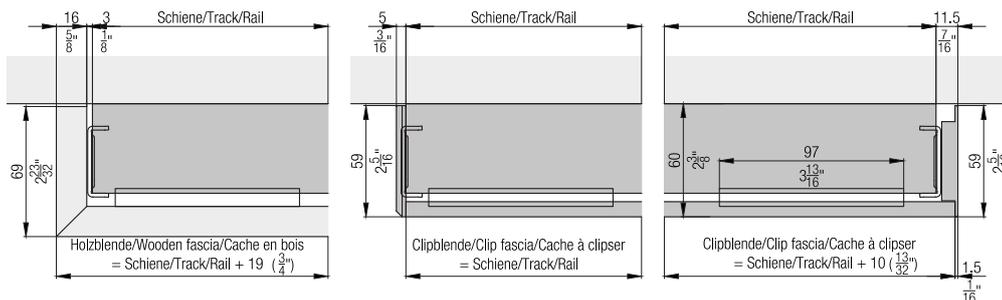
Wall mounting rails with extended spacing of +9 mm/+20 mm (11/32\"/25/32\") between door and wall.



Optional: Wall bracket bottom guide



Calculations of clip-on panels



Soft close

Technical drawing showing door profile details and dimensions for soft close configurations. Dimensions include ≥ 320 , $\geq 1'-19\frac{3}{32}"$, $Z \geq 535$, and $Z \geq 1'-9\frac{1}{16}"$.

*	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/HC	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Porta 60/100 HM/HMD/HMT	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Porta 100 G/GU/GM/GMT	1' 8 ⁵ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Porta 100 GF	1' 6 ²⁹ / ₃₂ "			2' 4 ³ / ₄ "		
Hawa Porta 100 GW/GWF	1' 8 ⁵ / ₃₂ "	1' 9 ¹¹ / ₃₂ "	1' 11 ¹ / ₄ "	2' 6"	2' 6 ²⁹ / ₃₂ "	2' 7 ³ / ₁₆ "
Hawa Porta 100 GMD	1' 7 ⁷ / ₃₂ "	1' 9 ⁷ / ₃₂ "	1' 11 ¹ / ₄ "	2' 5 ¹ / ₁₆ "	2' 7 ¹ / ₁₆ "	2' 7 ³ / ₁₆ "
Hawa Divido 100 H/HM/GR	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Divido 100 GRM	1' 8 ⁵ / ₃₂ "	1' 10 ¹¹ / ₃₂ "	1' 0 ¹ / ₂ "	2' 6"	2' 8 ⁵ / ₃₂ "	2' 10 ¹¹ / ₃₂ "

Additional dimensions: ≥ 570 , $\geq 1'-10\frac{7}{16}"$, $Z \geq 840$, $Z \geq 2'-9\frac{1}{16}"$.

Text: "Beidseitig gedämpfte Ausführungen ohne stirnseitigen Zugang erfordern zwei Montageöffnungen. Versions with soft closing mechanism at both sides without access from the leading edge require two assembly openings. Les versions avec amortissement bilatéral sans accès frontal exigent deux ouvertures de montage."

Diagram: Montageöffnung assembly opening ouverture de montage. Dimensions: 62, 2⁷/₁₆", 32, 1¹/₄".

Soft close

Technical drawing showing door profile details and dimensions for soft close configurations. Dimensions include ≥ 62 , $\geq 2\frac{7}{16}"$, ≥ 320 , $\geq 1'-19\frac{3}{32}"$, $Z \geq 480$, and $Z \geq 1'-6\frac{29}{32}"$.

*	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/HC	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Porta 60/100 HM/HMD/HMT	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Porta 100 G/GU/GM/GMT	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Porta 100 GF	1' 6 ²⁹ / ₃₂ "			2' 4 ³ / ₄ "		
Hawa Porta 100 GW/GWF	1' 8 ⁵ / ₃₂ "	1' 9 ¹¹ / ₃₂ "	1' 11 ¹ / ₄ "	2' 6"	2' 6 ²⁹ / ₃₂ "	2' 7 ³ / ₁₆ "
Hawa Porta 100 GMD	1' 7 ⁷ / ₃₂ "	1' 9 ⁷ / ₃₂ "	1' 11 ¹ / ₄ "	2' 5 ¹ / ₁₆ "	2' 7 ¹ / ₁₆ "	2' 7 ³ / ₁₆ "
Hawa Divido 100 H/HM/GR	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Divido 100 GRM	1' 8 ⁵ / ₃₂ "	1' 10 ¹¹ / ₃₂ "	1' 0 ¹ / ₂ "	2' 6"	2' 8 ⁵ / ₃₂ "	2' 10 ¹¹ / ₃₂ "

Additional dimensions: ≥ 62 , $\geq 2\frac{7}{16}"$, ≥ 570 , $\geq 1'-10\frac{7}{16}"$, $Z \geq 730$, $Z \geq 2'-4\frac{3}{4}"$.

Diagram: Montageöffnung assembly opening ouverture de montage. Dimensions: 62, 2⁷/₁₆", 32, 1¹/₄".

Accessories

- Lock solutions from page 511
- General accessories from page 518

Planning/execution

Further information about the product can be found on www.hawa.com.