

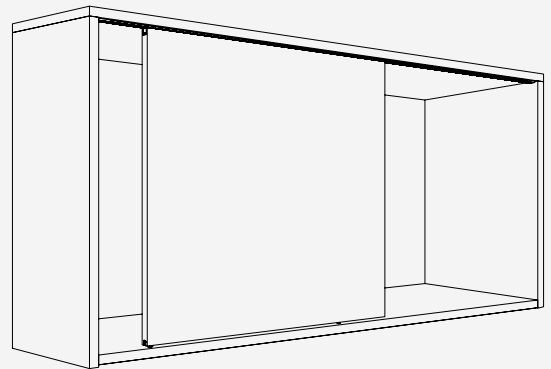
Fitting for 1-2 top-running wooden doors up to 16 kg (35 lbs.), with groove mounted running track. With soft and self closing mechanism. Design Inside.

Product highlights

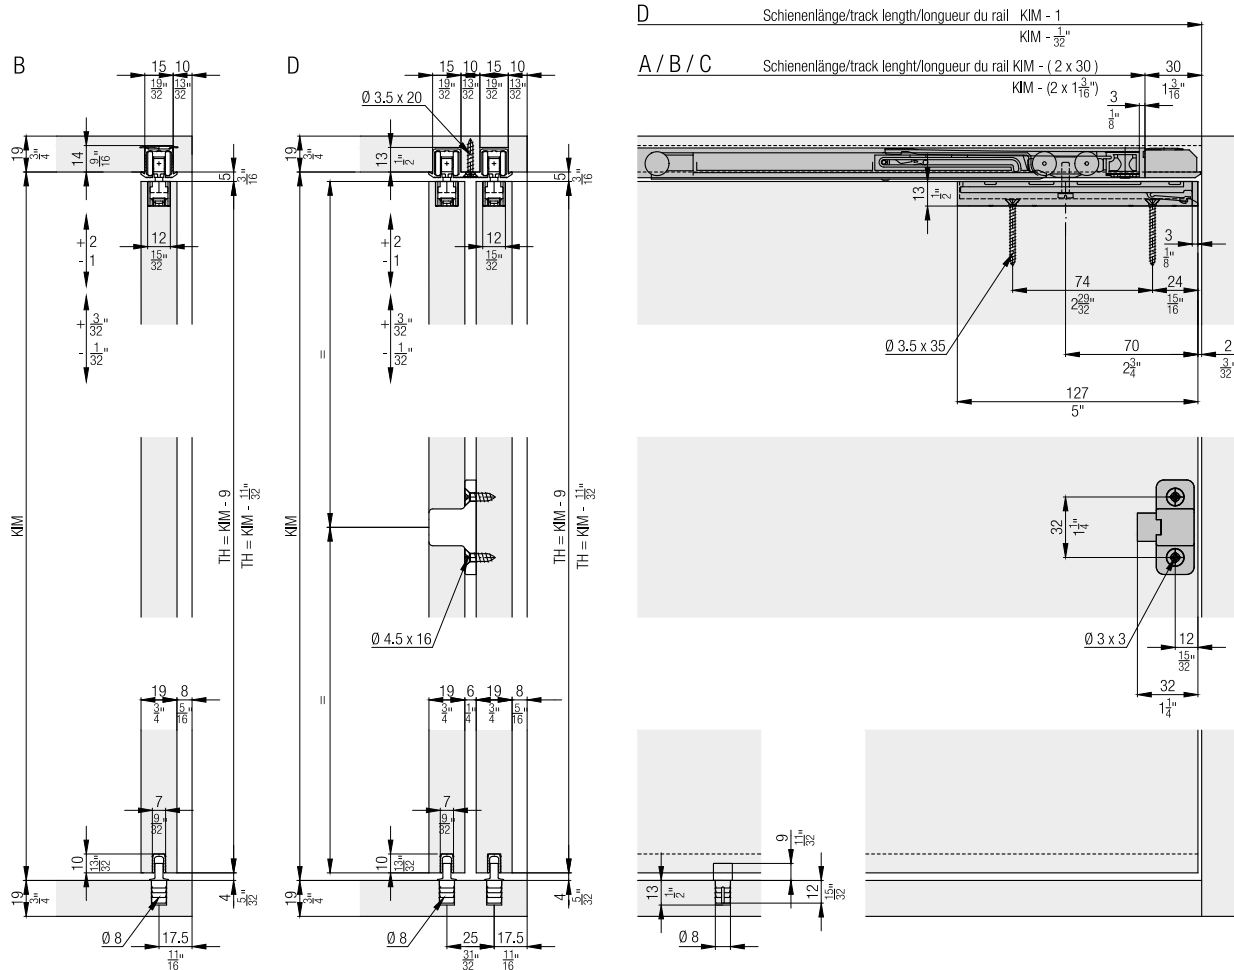
- Aesthetics** Optimum solution for serving hatches thanks to the lateral, concealed running system
- Comfort** Smooth, silent running with Comfort Roller and soft and self closing system for different door weights

Technical specifications

- Max. 16 kg (35 lbs.)
- Max. 1400 mm (4'7 1/8")
- Max. 1000 mm (3'3 3/8")
- 19-25 mm (3/4" to 31/32")








Installation examples



Set for 1 wooden door up to 16 kg (35 lbs.),  
with height adjustment  
Always order 2 sets with 2 doors.

	No.
Hawa Clipo 16 HM IS, for 1 door	053.3223.071



**Set consisting of:**

	053.3223.071	No.
 Running gear Hawa Clipo 16, with support and screw	2	053.3224.071
 Hawa Clipo 16/ Hawa Regal 16 C stopper, plastic, gray	2	053.3215.071
 Housing, plastic, anthracite	2	053.0216.001
 Flat countersunk head chipboard screw 3,5x35 mm (5/32" x 1 3/8"), steel, zinc-plated	4	766.5035.135
 Hawa Clipo 16 H bottom guide, plastic, anthracite	1	053.3214.001


Door follower  
Order 1 set with 2 doors.

	No.
Set door follower	053.3236.171

**Set consisting of:**



	053.3236.171	No.
 Door follower, plastic, anthracite	1	053.3217.071
 Flat countersunk head chipboard screw, 4.5x16 mm (3/16" x 5/8"), steel, zinc-plated	2	600.0000.478

**Running tracks**


		mm (inch)	No.
	A: Single running track, for glue fixing, aluminum	2,500 (8' 2 7/16")	053.3229.250
		3,500 (11' 5 25/32")	053.3229.350
		6,000 (19' 8 7/32")	053.3229.600
	B: Single running track, with swivel-lug, aluminum (pas pour bois dur/MDF)	2,500 (8' 2 7/16")	053.3227.250
		3,500 (11' 5 25/32")	053.3227.350
		6,000 (19' 8 7/32")	053.3227.600
	C: Single running track, aluminum, pre-drilled	2,500 (8' 2 7/16")	053.3225.250
		3,500 (11' 5 25/32")	053.3225.350
		6,000 (19' 8 7/32")	053.3225.600
	D: Double running track, aluminum, pre-drilled	2,500 (8' 2 7/16")	053.3226.250
		3,500 (11' 5 25/32")	053.3226.350
		6,000 (19' 8 7/32")	053.3226.600

**Track end piece set for single running tracks**

	No.
Track end piece, for screw fixing, plastic, gray	053.3210.081
Track end piece, with swivel lug, plastic, gray	053.3211.081

	053.3210.081	053.3211.081	No.
<b>Set consisting of:</b>			
 Track-end piece, for screw fixing, plastic, grey	2		053.3210.001
 Track-end piece, with swivel lug, plastic, grey		2	053.3211.071





**Guide tracks**

		mm (inch)	No.
	Guide track, groove width 7 mm (9/32"), plastic, anthracite	2,500 (8' 2 7/16")	053.3012.250
		3,500 (11' 5 25/32")	053.3012.350
		6,000 (19' 8 7/32")	053.3012.600


**Soft close up to 8/16 kg (17/35 lbs.)**

	No.
Soft close Hawa Clipo 16/Hawa Regal C 16, up to 8 kg (17 lbs.)	053.3332.071
Soft close Hawa Clipo 16/Hawa Regal C 16, up to 16 kg (35 lbs.)	053.3332.072



**Set consisting of:**

		053.3332.071	053.3332.072	No.
	Damper, up to 8 kg (17 lbs.)	2		053.3330.071
	Trigger, with stopper	2	2	053.3331.071
	Cross recessed pan head screw, 2.2x8 mm (3/32"x5/16"), steel, zinc-plated	2	2	600.0000.482
	Damper, up to 16 kg (35 lbs.)		2	053.3330.072


**Guide tracks 4-point guidance**

		mm (inch)	No.
	Single guide track, for glue fixing, aluminum, anodized	6,000 (19' 8 7/32")	053.3296.600

**Components 4-point guidance**

		No.
	Bottom guide Hawa Clipo IS/ Hawa Regal C 16, plastic, anthracite	040.3124.071
	Stopper guide track, plastic, grey	053.5094.071

**Accessories**

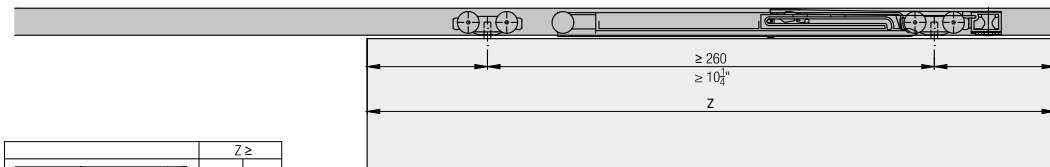
		No.
	Track cleaner, plastic, red	040.3142.071



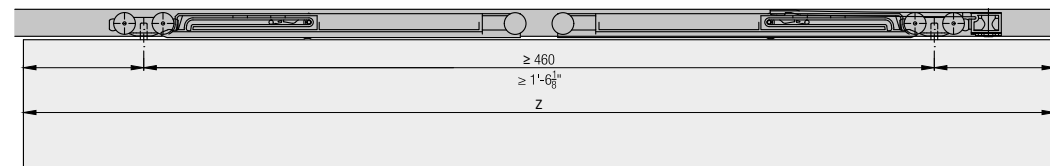
**Soft close**



	Z ≥	
	1	2
Hawa Clipo 16 H IS	1' 3 <sup>3</sup> / <sub>4</sub> "	1' 11 <sup>5</sup> / <sub>8</sub> "
Hawa Clipo 16 H MS	1' 5 <sup>1</sup> / <sub>4</sub> "	2' 1 <sup>3</sup> / <sub>8</sub> "
Hawa Clipo 16 H FS	1' 5 <sup>1</sup> / <sub>4</sub> "	2' 1 <sup>3</sup> / <sub>8</sub> "
Hawa Clipo 16 HM IS	1' 3 <sup>3</sup> / <sub>4</sub> "	1' 11 <sup>5</sup> / <sub>8</sub> "
Hawa Clipo 16 GK IS	1' 3 <sup>3</sup> / <sub>4</sub> "	1' 11 <sup>5</sup> / <sub>8</sub> "
Hawa Clipo 16 GS IS	1' 3 <sup>3</sup> / <sub>4</sub> "	1' 11 <sup>5</sup> / <sub>8</sub> "
Hawa Clipo 16 GPK IS	1' 3 <sup>3</sup> / <sub>4</sub> "	1' 11 <sup>5</sup> / <sub>8</sub> "
Hawa Clipo 16 GPPK IS	1' 3 <sup>3</sup> / <sub>4</sub> "	1' 11 <sup>5</sup> / <sub>8</sub> "



	Z ≥	
	1	2
Hawa Clipo 16 H IS	400	600
Hawa Clipo 16 H MS	438	638
Hawa Clipo 16 H FS	438	638
Hawa Clipo 16 HM IS	400	600
Hawa Clipo 16 GK IS	400	600
Hawa Clipo 16 GS IS	400	600
Hawa Clipo 16 GPK IS	400	600
Hawa Clipo 16 GPPK IS	400	600



**Accessories**

– Straightening fitting from page 236

**Planning/execution**

Further information about the product can be found on [www.hawa.com](http://www.hawa.com).