


Fitting for top-running wooden doors up to 40 kg (88 lbs.), with surface mounted running track or running track flush with the ceiling. Optionally with soft and self closing mechanism. Ceiling mounting. Minimal installation height. Wall pocket solution.

Product highlights


- Flexibility** The running track can be installed and removed at any time
- Aesthetics** Thanks to integrated spring stop with Push-to-open function, there are no visible hardware components, door milling grooves or spring handles at the edge of the door

Technical specifications

- Max. 40 kg (88 lbs.)
- Max. 4000 mm (13'1 15/32")
- Max. 1250 mm (4'1 7/32")
- 35–80 mm (1 3/8" to 3 5/32")

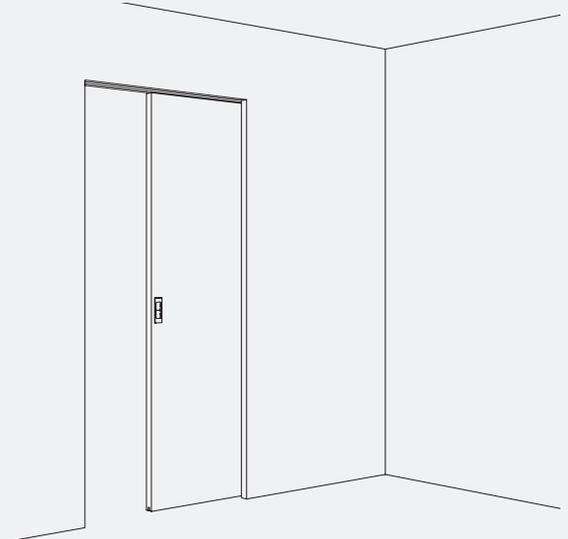



Installation examples

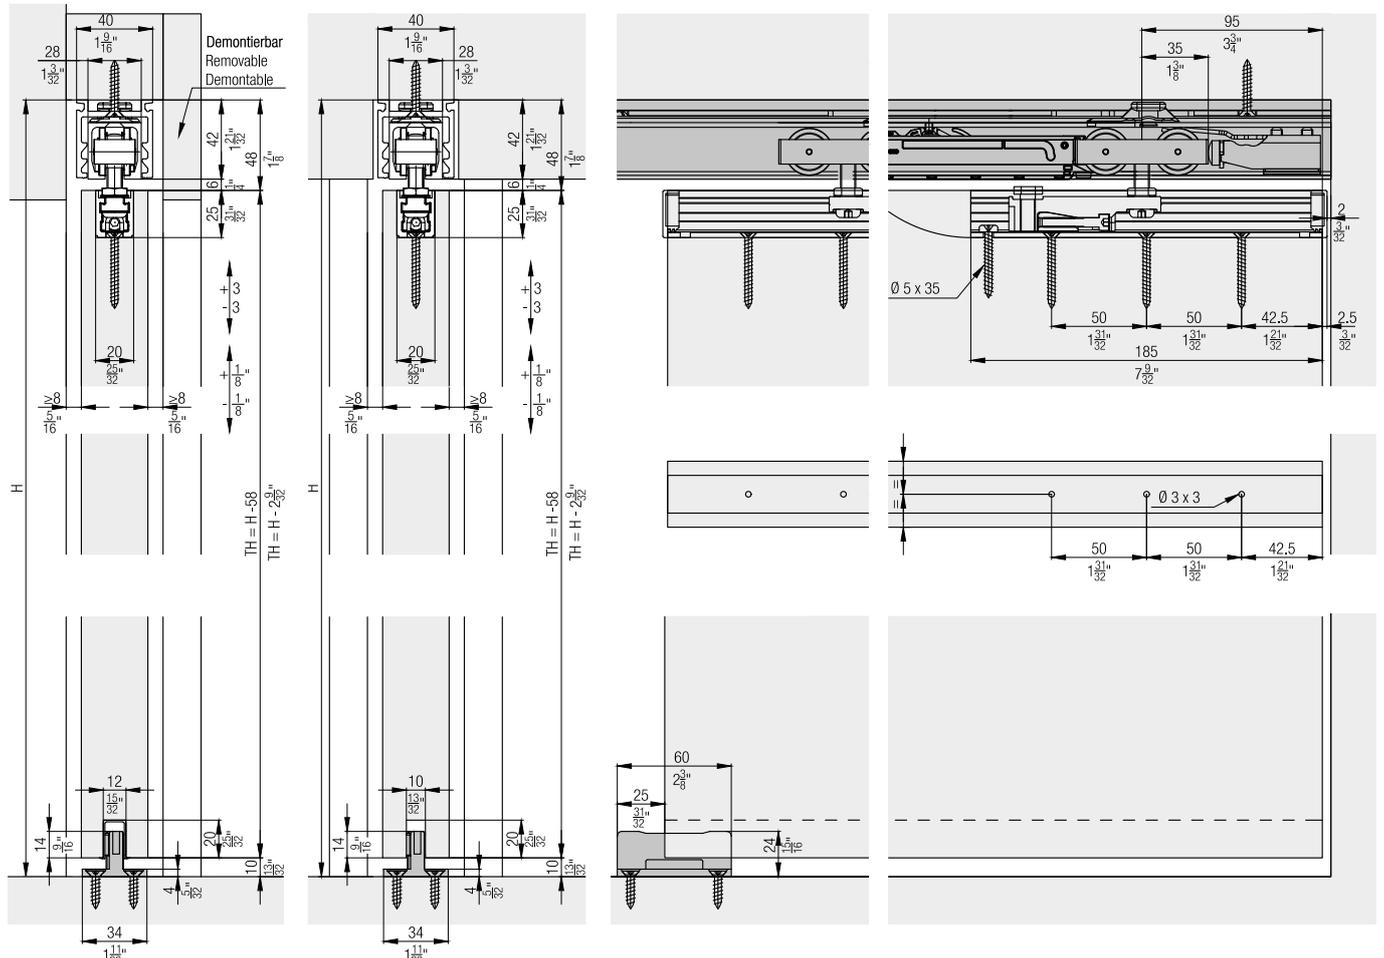


Set for 1 wooden door up to 40 kg (88 lbs.)

	No.
Hawa Junior 40 B, for 1 door	25903
Hawa Junior 40 B, with 2 track stoppers, for 1 door	26039


Set consisting of:

		25903	26039	No.
	Two-wheeled running gear, M8, plastic wheels	2	2	25898
	Stopper, with adjustable retention spring	1	2	10640
	Suspension profile, plate with screw M8, frontal attachment	2	2	19631
	Cover cap to suspension profile, plastic, anthracite	2	2	21520
	Bottom guide, zero tolerance, groove width 10 mm (13/32"), plastic black	1	1	14427
	Screw-on rubber door stop	1	1	10629
	Adjustment and fixing key for suspension assembly	1	1	10793
	Hex key 4 mm, length 160 mm	1	1	19931

Running tracks

		mm (inch)	No.
	Running track, aluminum, anodized, pre-drilled	1,400 (4' 7 1/8 ")	10213
		1,600 (5' 3 ")	10214
		1,800 (5' 10 7/8 ")	10215
		2,000 (6' 6 3/4 ")	10216
		2,500 (8' 2 7/16 ")	25997
		cut to size	10217


Guide tracks

		mm (inch)	No.
	Guide track, for groove mounting, plastic, 10-piece set	1,300 (4' 3 3/16 ")	14540


Assembly set

	No.
Set for mountable and demountable running track, up to 2000 mm (6'6 3/4")	25990
Set for mountable and demountable running track, up to 2500 mm (8'2 7/16")	25992

Set consisting of:

		mm (inch)	25990	25992	No.
	Retainer profile with a bayonet lock, aluminum, anodized	2,000 (6' 6 3/4 ")	1		25913
	Small parts to retainer profile, 6-piece set		1		25989
	Retainer profile with a bayonet lock, aluminum, anodized	2,500 (8' 2 7/16 ")		1	25914
	Small parts to retainer profile, 7-piece set			1	25991

Panels

		mm (inch)	No.
	Clip-on panel to retainier profile, for fascia mounting, aluminum, anodized	2,000 (6' 6 3/4 ")	25985
	Clip-on panel to retainier profile, for lintel mounting, aluminum, anodized	cut to size	27694

Soft close SoftMove 40
For soft closing in opening and closing direction
order 2 sets.


	No.
	25987

Accessories

		No.
	Spring loaded stopper Hawa Junior 40	27200
	Bottom guide, rattle proof, groove width 10 mm (13/32\"), plastic, black, 10-piece set	25958

Calculations of running track length


The length of the running track must be shorter than the diagonal clearance (P2) by at least 80 mm (3 5/32\").

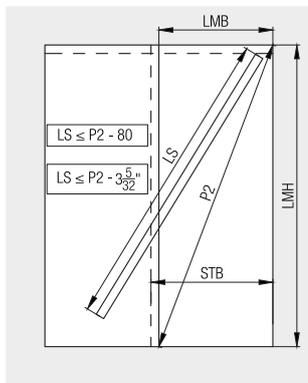

LMB = inside clearance
 LMH = inside height
 STB = sliding door width
 P2 = diagonal clearance
 LS = running track

Spring stop


The specially developed spring stop for ejecting the door is integrated into the running track without visible fittings on the door edge.

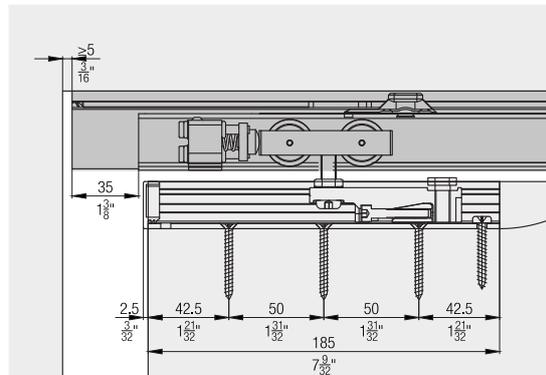

Calculations of door width


The following factors affect the calculation of the width of the sliding door:

- Open or closed guide groove
- Construction with or without spring stop (27200)

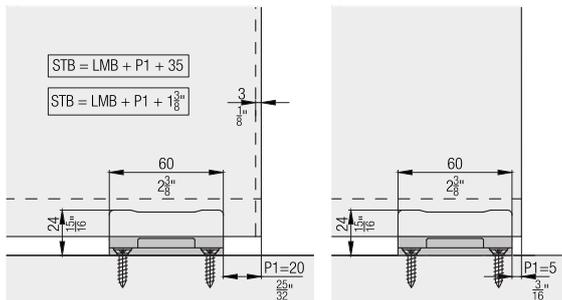



Facing for the retainer profile

The optional clip-on panel made of aluminum can be clipped onto the retainer profile without additional fixing components. For invisible fastening of the lintel panelling, there is the option of covering the clip panel on site, using panels up to 40 mm (1 9/16\"), thick.



SoftMove 40 soft closing mechanism

Completely integrated into the running track, the SoftMove 40 decelerates sliding doors and draws them into their final position.

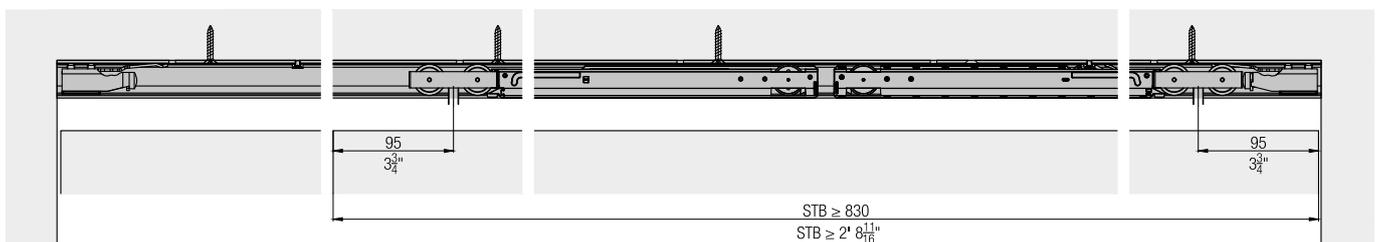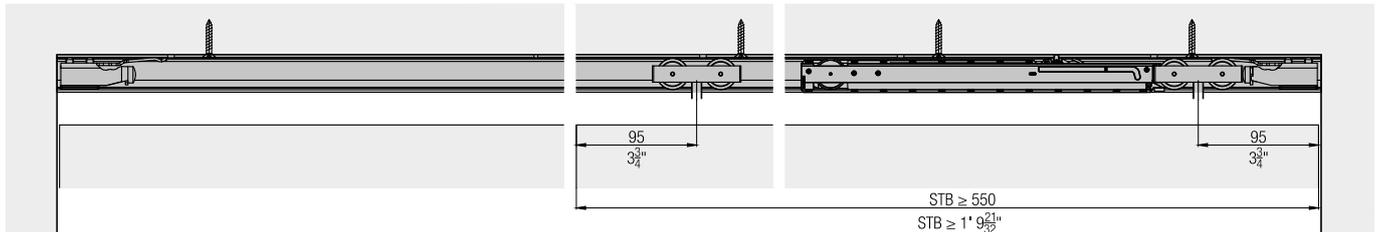

Accessories

- Hawa Junior bottom guides for wall mounting from page 508
- Lock solutions from page 511
- General accessories from page 518

Planning/execution

Further information about the product can be found on www.hawa.com.