Fitting for 2 top-running glass doors up to 16 kg 835 lbs.), with screwed on or groove mounted running track. With soft and self closing mechanism. Design Inslide.

Product highlights

Comfort Smooth, silent running with Comfort Roller and soft

and self closing system for different door weights

Productivity Easy installation with tool-less clip-on system


and convenient height adjustment

Technical specifications


Max. 16 kg (35 lbs.)

↑ Max. 1400 mm (4'7 1/8")

→[]← 6-6.35 mm (1/4'')



Installation examples

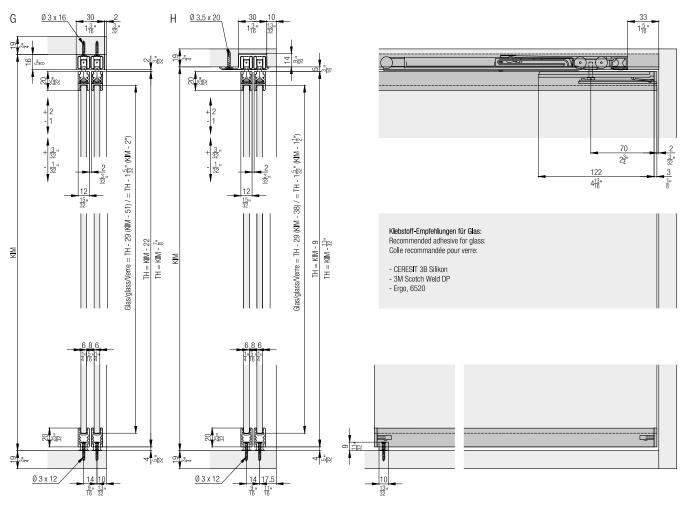

Set for 2 glass doors up to 16 kg (35 lbs.), with height adjustment

| | | No. | |
|-----------------|--|--------------|--------------|
| Hawa Clipo 16 0 | GPPK IS, for 2 doors | | 053.3265.071 |
| | | | |
| Set consisting | of: | 053.3265.071 | No. |
| 660 | Running gear Hawa Clipo 16, with support and screw | 4 | 053.3224.071 |
| | Hawa Clipo 16/Hawa Regal 16 C stopper, plastic, gray | 2 | 053.3215.071 |
| | Housing, plastic, anthracite | 4 | 053.3252.071 |
| | Door follower, plastic, grey | 1 | 053.3075.071 |
| 242 | Pan head thread forming screw, M3x6 mm (1/8"x1/4"), steel, zinc-plated | 1 | 600.0000.488 |
| | End cover, plastique, grey | 4 | 053.3255.071 |
| C | Bottom guide, plastic grey | 2 | 053.3254.001 |
| | Pan-Head chipboard screw, 3x20 mm (1/8"x25/32"), steel, zinc-plated | 2 | 766.5030.117 |

Suspension and glass retaining profiles

| | mm (inch) | No. |
|---|-------------------------|--------------|
| Glass fixing profile, for glue fixing, aluminum, anodized | 2,500 (8' 2 7/16'') | 053.3250.250 |
| | 3,500 (11' 5 25/32") | 053.3250.350 |
| | 6,000 (19' 8 7/32'') | 053.3250.600 |

Adhesive

| | No. |
|----------------------------------|--------------|
| Glue Ceresit 3B Silicone, 310 ml | 098.0027.000 |

Running tracks

| | mm (inch) | No. |
|--|--------------------------|--------------|
| G: Double running track, for screw fixing, aluminum, anodized | 2,500 (8' 2 7/16'') | 053.3247.250 |
| | 3,500 (11' 5 25/32'') | 053.3247.350 |
| | 6,000 (19' 8 7/32'') | 053.3247.600 |
| H: Double running track, aluminum, pre-drilled | 2,500 (8' 2 7/16") | 053.3248.250 |
| | 3,500 (11' 5 25/32'') | 053.3248.350 |
| | 6,000 (19' 8 7/32'') | 053.3248.600 |

Soft close up to 8/16 kg (17/35 lbs.)


| | No. |
|---|--------------|
| Soft close Hawa Clipo 16/Hawa Regal C 16, up to 8 kg (17 lbs.) | 053.3332.071 |
| Soft close Hawa Clipo 16/Hawa Regal C 16, up to 16 kg (35 lbs.) | 053.3332.072 |

| Set consisting | of: | 053.3332.071 | 053.3332.072 | No. |
|----------------|--|--------------|--------------|--------------|
| | Damper, up to 8 kg (17 lbs.) | 2 | | 053.3330.071 |
| *** | Trigger, with stopper | 2 | 2 | 053.3331.071 |
| | Cross recessed pan head screw, 2.2x8 mm (3/32"x5/16"), steel, zinc-plated | 2 | 2 | 600.0000.482 |
| | Damper, up to 16 kg (35 lbs.) | | 2 | 053.3330.072 |


Handles

| | | No. |
|---|---|--------------|
| | Handle, for glue fixing, 64 mm (2 17/32"), plastic, chrome-plated, matt, 2-piece set | 053.3323.971 |
| 6 | Finger-pull-handle, for glue fixing, 30 mm (1 3/16"), aluminum, anodized, 2-piece set | 053.3091.982 |
| | Finger-pull-handle, for glue fixing, 30 mm (1 3/16"), aluminum, anodized, 50-piece set | 053.3091.983 |
| | Finger-pull-handle, for glue fixing, 40 mm (1 9/16"), aluminum, anodized | 053.3158.901 |


Accessories




Calculations



Door follower



Soft close

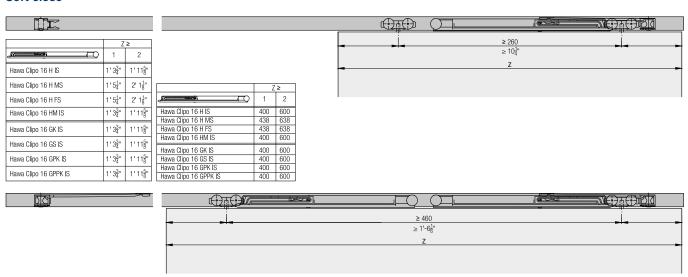

Accessories

- Glass recommendations from page 249

Planning/execution

Further information about the product can be found on www.hawa.com.