







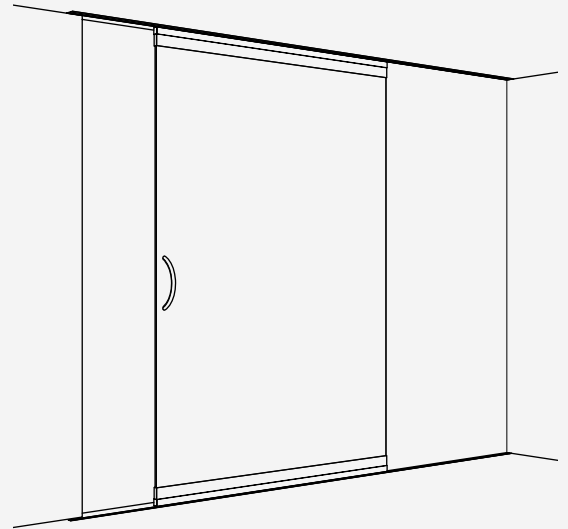
Fitting for top-running glass doors up to 250 kg (551 lbs.), with surface mounted running track or running track flush with the ceiling. Ceiling mounting.

Product highlights

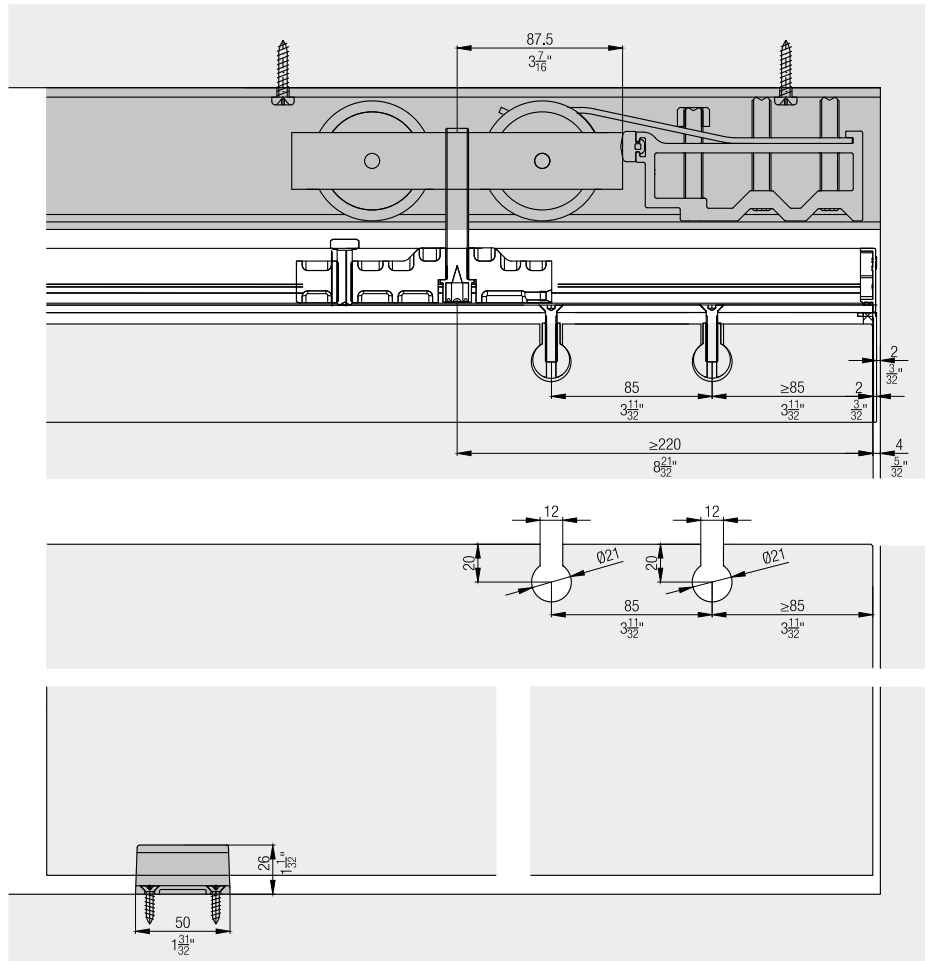
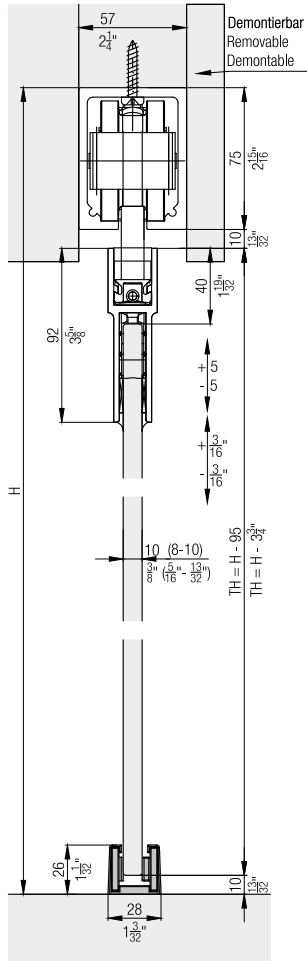
-  **Comfort** High quality steel ball bearing rollers for quiet, smooth running, even with heavy weights
-  **Security** Very safe thanks to positive-fit glass fixing

Technical specifications

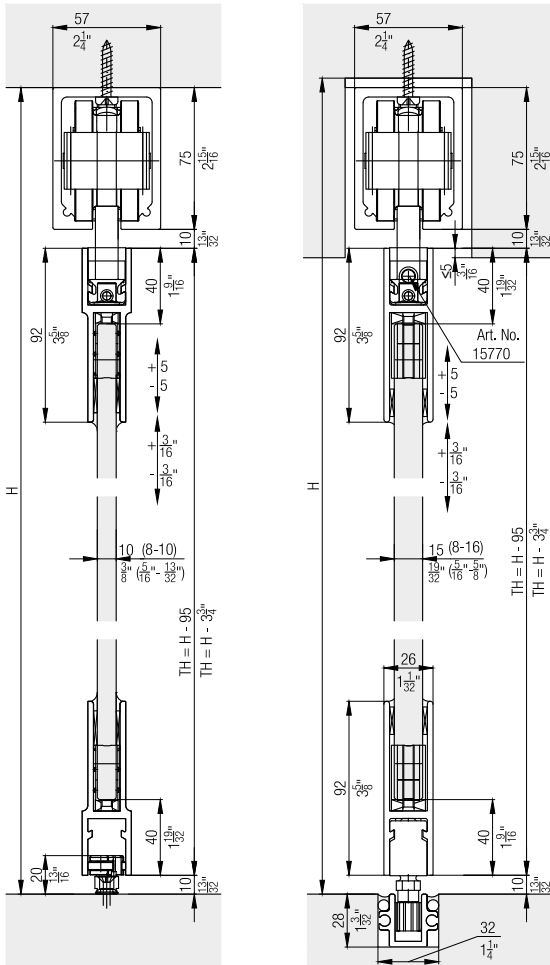
-  Max. 250 kg (551 lbs.)
-  Max. 4000 mm (13'1 15/32")
-  Max. 3000 mm (9'10 1/8")
-  8–16 mm (5/16" to 5/8")



Installation examples









Further installation examples






Set for 1 glass door up to 250 kg (551 lbs.)

| | No. |
|-------------------------------|-------|
| Hawa Junior 250 G, for 1 door | 21738 |



Set consisting of:

| | | 21738 | No. |
|---|--|-------|-------|
|  | Two-wheeled running gear, M12, plastic wheels | 2 | 20731 |
|  | Track stopper, with adjustable retention spring | 2 | 20995 |
|  | Suspension plate, with suspension bolt M12 | 2 | 21739 |
|  | Rubber buffer, 29x11 mm (1 5/32"x7/16"), for screw fixing | 1 | 13114 |
|  | Cover cap for glass vsuspension profile, plastic, anthracite | 2 | 20907 |
|  | Adjustment and fixing key for suspension assembly | 1 | 10793 |

Suspension and glass retaining profiles


| | | mm (inch) | No. |
|---|--|----------------------|-------|
|  | Glass suspension/retainer profile, aluminum, anodized, brushed, glass up to 8–16 mm (5/16"–5/8") | 6,500 (21' 3 29/32") | 21783 |
| | | cut to size | 21784 |
| | Glass suspension/retainer profile, aluminum, glass up to 16 mm (5/8") | 6,500 (21' 3 29/32") | 13158 |
| | Glass suspension/retainer profile, aluminum, glass up to 16 mm (5/18") | cut to size | 13159 |
|  | Glass suspension/retainer profile, aluminum, anodized, brushed, glass up to 8–10 mm (5/16"–13/32") | 6,500 (21' 3 29/32") | 21781 |
| | | cut to size | 21782 |
| | Glass suspension/retainer profile, aluminum, glass up to 10 mm (13/32") | 6,500 (21' 3 29/32") | 10348 |
| | | cut to size | 10349 |
|  | Multi purpose suspension and retainer profile, aluminum, anodized, undrilled | 6,500 (21' 3 29/32") | 10345 |
| | | cut to size | 12915 |

Cover caps






| | | No. |
|---|--|-------|
|  | Cover cap for glass suspension/retainer profile 21783/21784/13158/13159, glass up to 16 mm (5/8"), plastic, anthracite | 21085 |
|  | Cover cap for glass suspension/retainer profile 21781/21782/10348/10349, glass up to 10 mm (13/32"), plastic, anthracite | 21512 |

Glass holder


Order 4 pieces per suspension and glass retaining profile

| | | No. |
|---|--|-------|
|  | Glass holder insert, plastic, with countersunk head screw, M6x30 mm (1/4"x1 3/16") | 10792 |


Bottom guides

| | | No. |
|---|--|-------|
|  | Guide, rattle proof, with suspension block, plastic, 14 mm (9/16") | 13781 |
|  | Bottom guide, rattle proof, with self-adhesive sliders for satinised glass, glass thickness 8–12.7 mm (5/16"–1/2"), chrome-plated, matt | 16029 |
|  | Bottom guide, rattle proof, with self-adhesive sliders for satinised glass, glass thickness 8–12.7 mm (5/16"–1/2"), stainless steel look | 21267 |
|  | Rattle-proof mounted guide, with wheels | 24905 |
|  | Connecting bolt for bottom guide track, 6x40 mm (1/4"x1 9/16"), steel, zinc-plated | 13759 |



Running tracks

| | | mm (inch) | No. |
|---|--|----------------------|-------|
|  | Running track, aluminum, anodized, pre-drilled | 4,000 (13' 1 15/32") | 20988 |
| | | 6,000 (19' 8 7/32") | 20612 |
| | | cut to size | 20990 |




Guide tracks

| | | mm (inch) | No. |
|---|--|------------------------|-------|
|  | Guide track, aluminum, anodized, pre-drilled | 6,000 (19' 8 7/32") | 13688 |
| | | cut to size | 13690 |








Wall connection

| | | mm (inch) | No. |
|--|---|-------------------------|-------|
|  | Wall profile, aluminum, anodized | 2,500 (8' 2 7/16") | 17020 |
| | | 3,500 (11' 5 25/32") | 17021 |
| | Wall profile, aluminum, stainless steel look, brushed | 2,500 (8' 2 7/16") | 20119 |
| | | 3,500 (11' 5 25/32") | 20120 |
|  | Seal profile, black, for wall profile | 2,500 (8' 2 7/16") | 16452 |
| | | 3,500 (11' 5 25/32") | 16453 |







Protective edge trims

| | | mm (inch) | No. |
|---|--|--------------------------|-------|
|  | Protective edge trim, for 10 mm glass (13/32"), plastic, transparent | 3,000 (9' 10 1/8 ") | 13822 |
| | | 6,000 (19' 8 7/32") | 13600 |
| | Protective edge trim, for 12 mm glass (15/32"), plastic, transparent | 3,000 (9' 10 1/8 ") | 13908 |
| | | 6,000 (19' 8 7/32") | 13907 |
| | Protective edge trim, for 12.7 mm glass (1/2"), plastic, transparent | 3,000 (9' 10 1/8 ") | 13912 |
| | | 6,000 (19' 8 7/32") | 13911 |
|  | Double-sided adhesive tape for protective edge trim | 50,000 (164' 1/2 ") | 22820 |
|  | Rubber profile self-adhesive, black, for 8–12,7 mm (5/16"–1/2") glass thickness, glass distance 4 mm | 5,000 (16' 4 27/32") | 19442 |
| | | 10,000 (32' 9 11/16") | 19443 |
| | | 50,000 (164' 1/2 ") | 19444 |
| | Rubber profile self-adhesive, translucent, for 8–12,7 mm (5/16"–1/2") glass thickness, glass distance 4 mm | 5,000 (16' 4 27/32") | 19445 |
| | | 10,000 (32' 9 11/16") | 19446 |
| | | 50,000 (164' 1/2 ") | 19447 |

Integrated locks

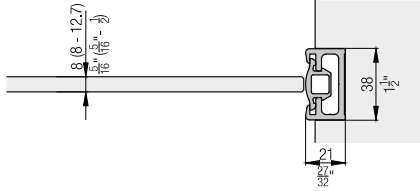
| | | No. |
|---|--|-------|
|  | Bar bolt lock for 17 mm profile cylinder (21/32"), with retention pin | 16760 |
| | Bar bolt lock for 22 mm round cylinder (7/8"), with retention pin | 16761 |
| | Bar bolt lock for square/hexagon socket, with retention pin | 16762 |
|  | Bar bolt lock for 17 mm (21/32") profile cylinder, with guide pin and fixing parts | 18484 |
| | Bar bolt lock for 22 mm (7/8") round cylinder, with guide pin and fixing parts | 18485 |
| | Bar bolt lock for square/hexagon socket with guide pin and fixing parts | 18486 |
|  | Security rose 16 mm (5/8"), for profile cylinder 17/61 mm (21/32"/2 13/32"), chrome nickel steel | 18502 |
|  | Spacer for security rose for 17 mm (21/32") profile cylinder, 10 mm (13/32") glass | 18493 |
| | Spacer for security rose for 22 mm (7/8") round cylinder, 10 mm (13/32") glass | 18494 |
|  | Floor-mounted sleeve with oblong hole and chromium-plated brass spring cover | 13787 |
|  | Rosette for floor-mounted sleeve | 17326 |
|  | Strike plate, steel, chrome-plated | 13130 |

Accessories

| | | No. |
|---|--|-------|
|  | Bottom door stopper, with centering, stainless steel look | 21473 |
|  | Bottom door stopper, with centering, chrome-plated, matt | 20773 |
|  | Hawa assembly wegde, for 1 door | 15770 |
|  | Connecting pins to profiles, 2-piece set | 21347 |
|  | Centering assembly grey, for all glass sliding doors | 18619 |
|  | Centering assembly black, for all glass sliding doors, to wall profile | 18663 |

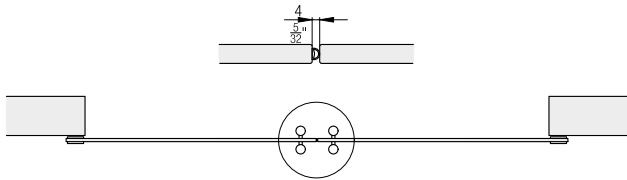
Wall connection

Optimal wall connection for all-glass sliding doors with unprotected glass edge.



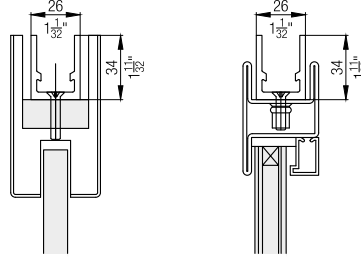
Glass edge protection

The transparent glass edge protection profile and the self-adhesive rubber profile are recommended for protecting the vertical glass edges. The latter not only protects the glass edges, it also reduces drafts to a minimum.



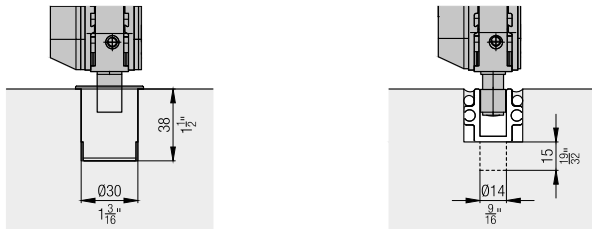
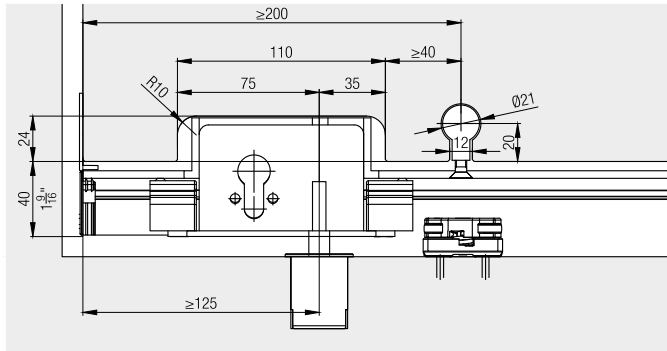
Individual solution

The suspension profile (12915) allows for the use of commercial as well as customer-specific suspension and glass retaining profiles.



Integrated locks

An integrated bar bolt lock, suitable for the 17 mm (21/32") profile cylinder, 22 mm (7/8") round cylinder and a square/hexagonal socket, is available to secure the all-glass sliding doors.



Accessories

- General accessories from page 518
- Glass recommendations from page 536

Planning/execution

Further information about the product can be found on www.hawa.com.