Fitting for 2–3 bottom-running wooden doors (19/25 mm) up to 50 kg (110 lbs.) with screwed on running track and integrated soft close. Design Forslide.

Product highlights

Comfort Sophisticated soft closing system and innovation

arrangement of the components for very easy

operation

Aesthetics Bottom-running system that supports the entire door

weight on the base makes cabinet designs with thin

materials possible


Technical specifications

Max. 50 kg (110 lbs.)


↑ Max. 2400 mm (7'10 7/16'')

↔ Max. 1400 mm (4'7 1/8'')

↑ 19/25 mm (3/4'' or 31/32'')



Installation examples

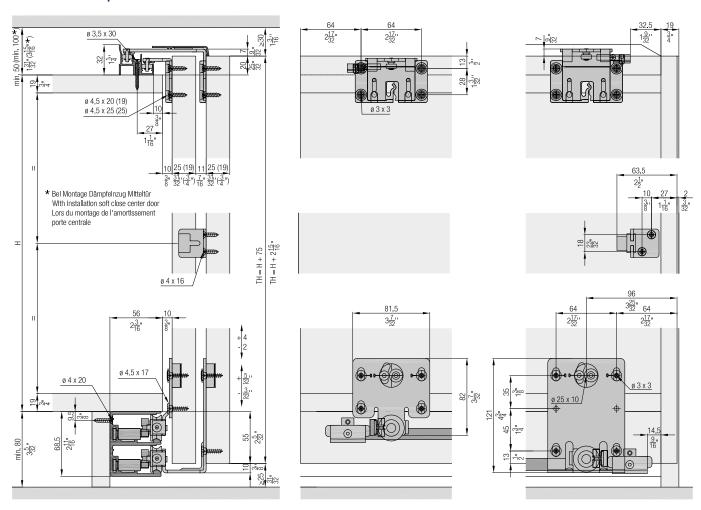

Set for 2 or 3 wooden doors, 19 mm (3/4")

	No.
Hawa Combino 50 H FS, door thickness 19 mm (3/4"), for 2 doors	055.3200.071
Hawa Combino 50 H FS, door thickness 19 mm (3/4"), for 3 doors	055.3200.073

Set consisting	055.3200.071	055.3200.073	No.	
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Running gear, einerior door, steel, zinc-plated	2	4	055.3169.071
	Running gear, exterior door, 19 mm (3/4"), steel, zinc-plated	2	2	055.3113.175
	Guide bracket, interior door, steel, zinc-plated	2	4	055.3107.171
Te i	Guide bracket, exterior door, 19 mm (3/4"), steel, zinc-plated	2	2	055.3109.171
En Mag	Guide bracket housing, plastic, anthracite	4	6	055.0282.001
	Stopper, plastic, gray	4	4	055.3167.071
	Retention spring for stopper, plastic, gray	2	3	055.0204.001
	Stopper guide, plastic, gray	4	4	040.3079.074
	Door follower, with 2 doors, steel, zinc-plated	1		055.3124.071
	Washer-and-screw assembly, 4.5x17 mm, steel, zinc-plated	16	24	055.0100.101
	Countersunk head screw, 4.5x20 mm, steel, zinc-plated	16	24	600.0000.167
	Door follower, with 3 doors, steel, zinc-plated		2	055.3126.171
	Buffer, with adhesive, 2-piece set		1	053.3364.051
	Thread-cutting rounded head screw, M4x8 mm, steel, zinc-plated		2	600.0000.328

Set for 2 or 3 wooden doors, 25 mm (31/32")

	No.
Hawa Combino 50 H FS, door thickness 25 mm (31/32"), for 2 doors	055.3200.072
Hawa Combino 50 H FS, door thickness 25 mm (31/32"), for 3 doors	055.3200.074

Set consisting	055.3200.072	055.3200.074	No.	
	Running gear, einerior door, steel, zinc-plated	2	4	055.3169.071
	Running gear, exterior door, 25 mm (31/32"), steel, zinc-plated	2	2	055.3114.175
	Guide bracket, interior door, steel, zinc-plated	2	4	055.3107.171
Till dear	Guide bracket, exterior door, 25 mm (31/32"), steel, zinc-plated	2	2	055.3110.171
Captag	Guide bracket housing, plastic, anthracite	4	6	055.0282.001
	Stopper, plastic, gray	4	4	055.3167.071
	Retention spring for stopper, plastic, gray	2	3	055.0204.001
	Stopper guide, plastic, gray	4	4	040.3079.074
	Door follower, with 2 doors, steel, zinc-plated	1		055.3124.071
**	Washer-and-screw assembly, 4.5x17 mm, steel, zinc-plated	16	24	055.0100.101
	Countersunk head screw, 4.5x25 mm, steel, zinc-plated	16	24	766.5045.125
	Door follower, with 3 doors, steel, zinc-plated		2	055.3126.171
	Buffer, with adhesive, 2-piece set		1	053.3364.051
	Thread-cutting rounded head screw, M4x8 mm, steel, zinc-plated		2	600.0000.328

Running tracks

Guide tracks

		mm (inch)	No.
	Double guide track, aluminum, anodized, pre-drilled		056.3072.250
		056.3072.350	
		056.3072.600	

Stopper extension For use without soft close order 4 pieces

	No.
Stopper extension, plastic, gray	055.3168.071

Panels

	mm (inch)	No.
	2500 (8'2 7/16'')	055.3130.250
Cover panel, aluminum, anodized		055.3130.350
		055.3130.600

Soft close

	No.
Hawa Combino 50 H MS/FS, up to 50 kg (110 lbs.), 2 pieces	055.3215.071
Hawa Combino 50 H MS/FS, up to 50 kg (110 lbs.), 4 pieces	055.3215.072


Set consisting of:		055.3215.071	055.3215.072	No.
	Soft close, left, up to 50 kg (110 lbs.)	1	2	055.3166.072
	Soft close, right, up to 50 kg (110 lbs.)	1	2	055.3166.071
	Activator soft close	2	4	055.3165.071
	Stopper extension, plastic, gray	2		055.3168.071
ADDIN	Thread-cutting head screw, M4x8 mm, steel, zinc-plated	2	4	600.0000.344


Soft close center door

	No.
Hawa Combino 50 H FS, center door	055.3216.071


Set consisting	of:	055.3216.071	No.
	Soft close, center door	1	055.3193.071
	Activator, center door soft close	1	055.3195.071
- FI	Safety device for guide bracket, plastic, anthracite	1	053.3099.001
00	Rubber buffer, plastic, transparent	2	055.0318.001
	Fillister head screw, 4x16 mm, steel, zinc-plated	2	600.0000.166
	Countersunk head screw, 4.5x20 mm, steel, zinc-plated	1	600.0000.167
®	Thread-cutting rounded head screw, M4x8 mm, steel, zinc-plated	2	762.7009.100

Calculations







Center door soft close for 3 doors





Handle profiles



Soft close

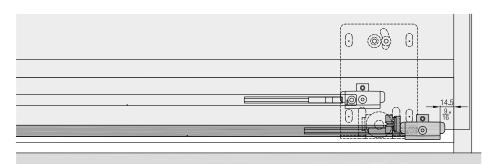



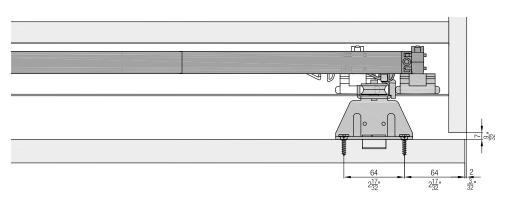

Accessories

- Straightening fitting from page 266Handle profiles from page 268
- Order overview soft close from page 270

Planning/execution

Further information about the product can be found on www.hawa.com.