


Fitting for top-running glass doors up to 40 kg (88 lbs.), with surface mounted running track or running track flush with the ceiling. Optionally with soft and self closing mechanism. Ceiling mounting. Minimal installation height. Wall pocket solution.

Product highlights


- Productivity** Easy height adjustment via both suspensions on completely installed door
- Aesthetics** The integrated spring stop gently pushes open sliding doors that are completely recessed in the wall pocket

Technical specifications

- Max. 40 kg (88 lbs.)
- Max. 4000 mm (13'1 15/32")
- Max. 1250 mm (4'1 7/32")
- 8-12.7 mm (5/16" to 1/2")

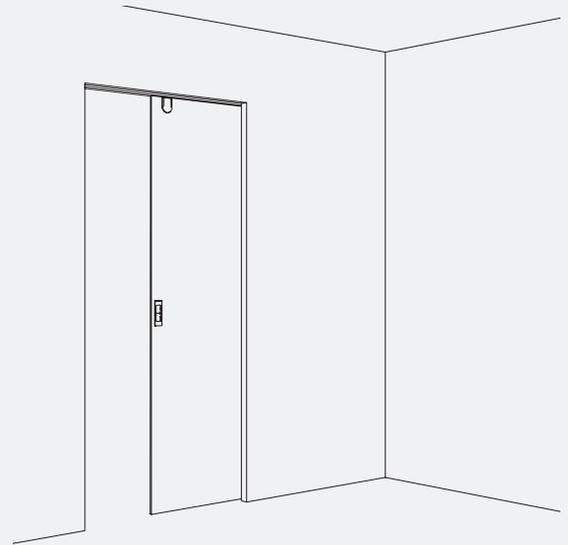



Installation examples

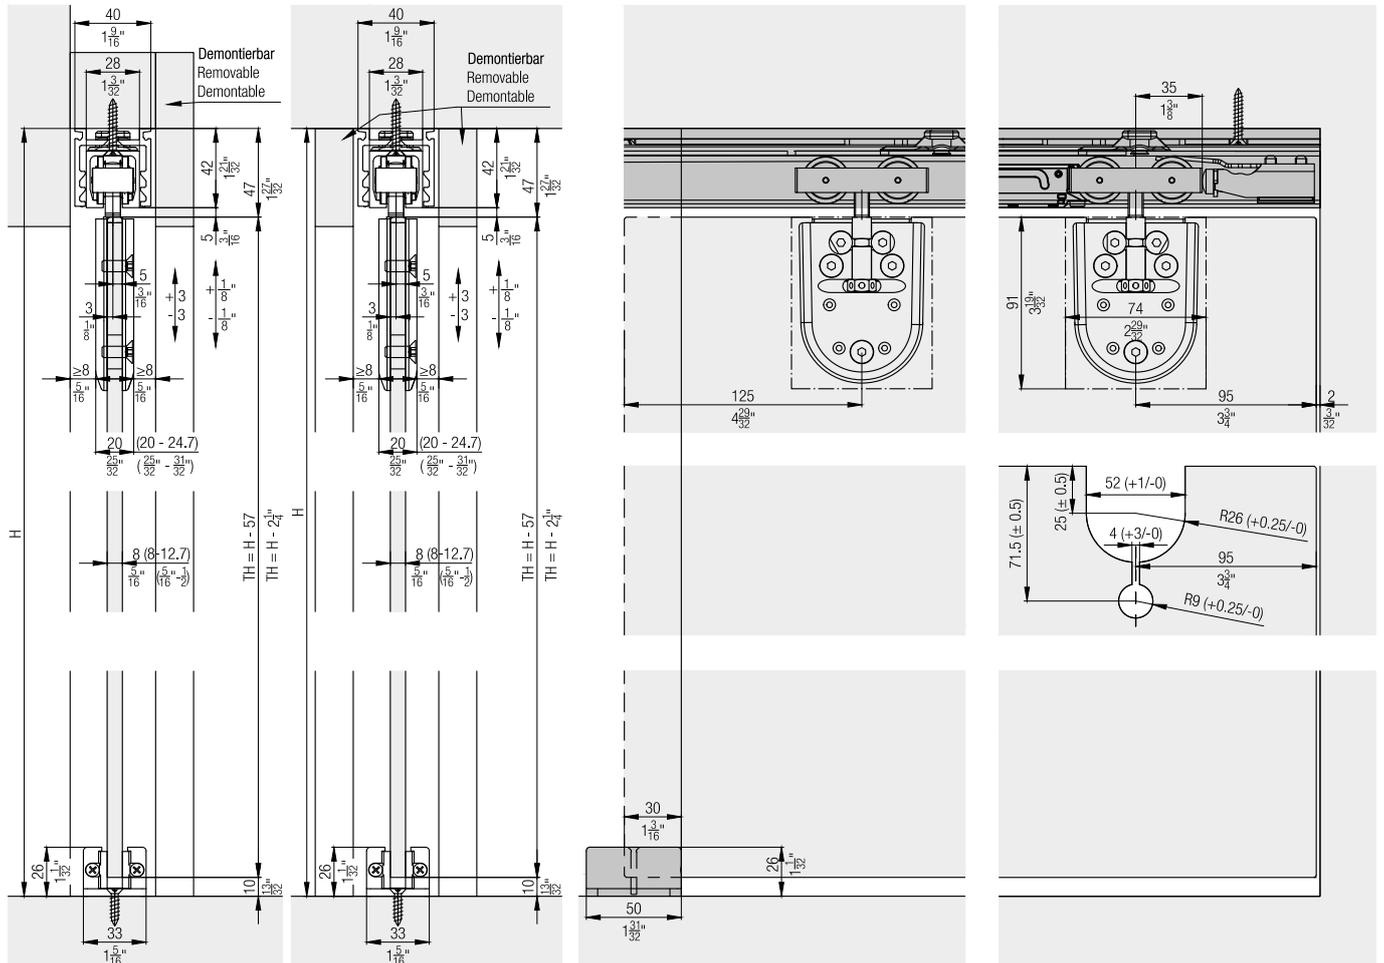

Set for 1 glass door up to 40 kg (88 lbs.)

	No.
Hawa Junior 40 GP, for 1 door	25904

Set consisting of:

		25904	No.
	Two-wheeled running gear, M8, plastic wheels	2	25898
	Stopper, with adjustable retention spring	2	10640
	Suspension bolt M8 and mounting screws	2	16017
	Patch suspension, with glass holder insert, without mounting screws	2	20505
	Screw-on rubber door stop	1	10629
	Single use drilling jig	1	20400
	Vertical adjustment pin	1	16329


Bottom guides

	No.	
	Bottom guide, playfree adjustable, glass thickness 8–12.7 mm (5/16"-1/2"), chrome-plated, mat	057.3082.071

Cover caps

		No.
	Cover cap, rounded, plastic, chrome-plated, matt, 1 piece	16049
	Cover cap, rounded, plastic, chrome-plated, matt, 4-piece set	16042
	Cover cap, rounded, plastic, chromium finish polished, 1 piece	17161
	Cover cap, rounded, plastic, chromium finish polished, 4-piece set	17160
	Cover cap, rounded, plastic, stainless steel look, 1 piece	16051
	Cover cap, rounded, plastic, stainless steel look, 4-piece set	16044
	Cover cap, rounded, plastic, raw, 1 piece	15823
	Cover cap, square, plastic, chrome-plated, matt, 1 piece	19091
	Cover cap, square, plastic, chrome-plated, matt, 4-piece set	19092
	Cover cap, square, plastic, stainless steel look, 1 piece	19093
	Cover cap, square, plastic, stainless steel look, 4-piece set	19094
	Square cover plate, plastic, raw, 1 piece	19000

Running tracks

		mm (inch)	No.
	Running track, aluminum, anodized, pre-drilled	1,400 (4' 7 1/8 ")	10213
		1,600 (5' 3 ")	10214
		1,800 (5' 10 7/8 ")	10215
		2,000 (6' 6 3/4 ")	10216
		2,500 (8' 2 7/16 ")	25997

Assembly set

	No.
Set for mountable and demountable running track, up to 2000 mm (6'6 3/4")	25990
Set for mountable and demountable running track, up to 2500 mm (8'2 7/16")	25992

Set consisting of:

		mm (inch)	25990	25992	No.
	Retainer profile with a bayonet lock, aluminum, anodized	2,000 (6' 6 3/4 ")	1		25913
	Small parts to retainer profile, 6-piece set		1		25989
	Retainer profile with a bayonet lock, aluminum, anodized	2,500 (8' 2 7/16 ")		1	25914
	Small parts to retainer profile, 7-piece set			1	25991

Panels

		mm (inch)	No.
	Clip-on panel to retainer profile, for fascia mounting, aluminum, anodized	2,000 (6' 6 3/4 ")	25985
	Clip-on panel to retainer profile, for lintel mounting, aluminum, anodized	cut to size	27694

Soft close SoftMove 40

For soft closing in opening and closing direction order 2 sets.

		No.
	Soft close SoftMove 40	25987

Wall connection


		mm (inch)	No.
	Wall profile, aluminum, anodized	2,500 (8' 2 7/16 ")	17020
		3,500 (11' 5 25/32 ")	17021
	Wall profile, aluminum, stainless steel look, brushed	2,500 (8' 2 7/16 ")	20119
		3,500 (11' 5 25/32 ")	20120
	Seal profile, black, for wall profile	2,500 (8' 2 7/16 ")	16452
		3,500 (11' 5 25/32 ")	16453

Accessories

		No.
	Spring loaded stopper Hawa Junior 40	27200
	Centering assembly grey, for all glass sliding doors	18619
	Centering assembly black, for all glass sliding doors, to wall profile	18663

Calculations of running track length


The length of the running track must be shorter than the diagonal clearance (P2) by at least 80 mm (3 5/32").

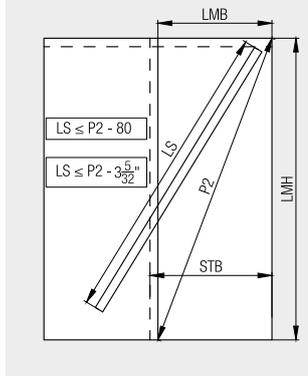

LMB = inside clearance
 LMH = inside height
 STB = sliding door width
 P2 = diagonal clearance
 LS = running track


Spring stop

The specially developed spring stop for ejecting the door is integrated into the running track without visible fittings on the door edge.

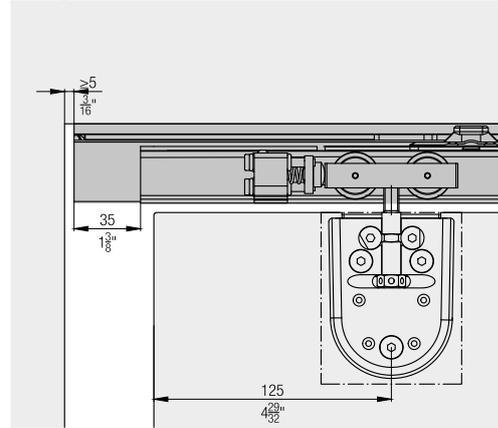


Detail rear door

Installation circumstances for bottom guide, rear suspension.

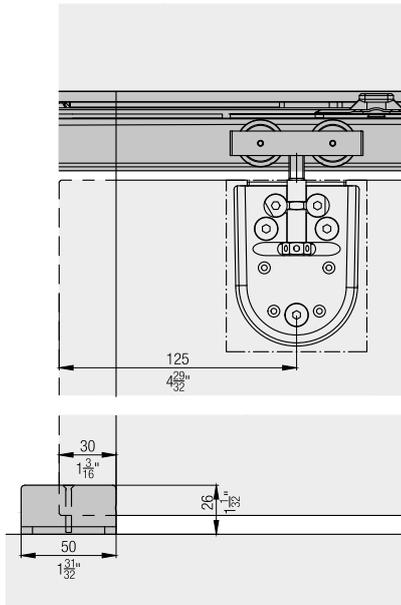


Wall connection

Optimal wall connection for all-glass sliding doors with unprotected glass edge.

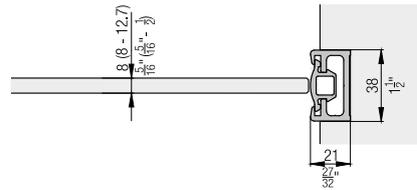


Further installation examples

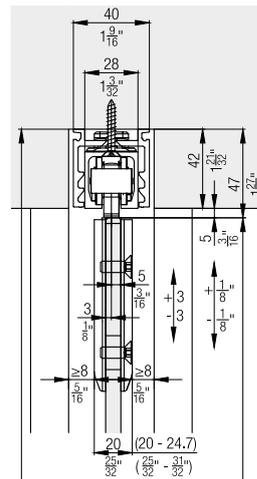



Facing for the retainer profile

The optional clip-on panel made of aluminum can be clipped onto the retainer profile without additional fixing components. For invisible fastening of the lintel panelling, there is the option of covering the clip panel on site, using panels up to 40 mm (1 9/16") thick.

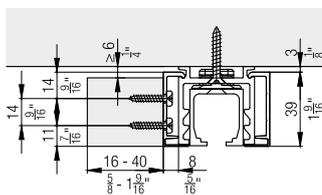

SoftMove 40 soft closing mechanism

Completely integrated into the running track, the SoftMove decelerates sliding doors and draws them into their final position.

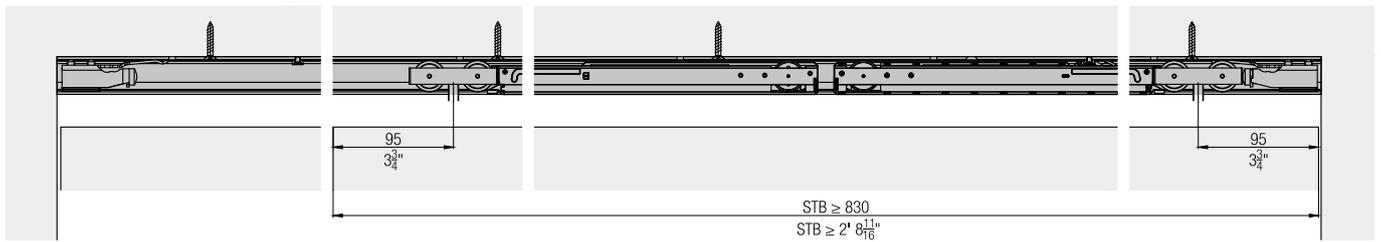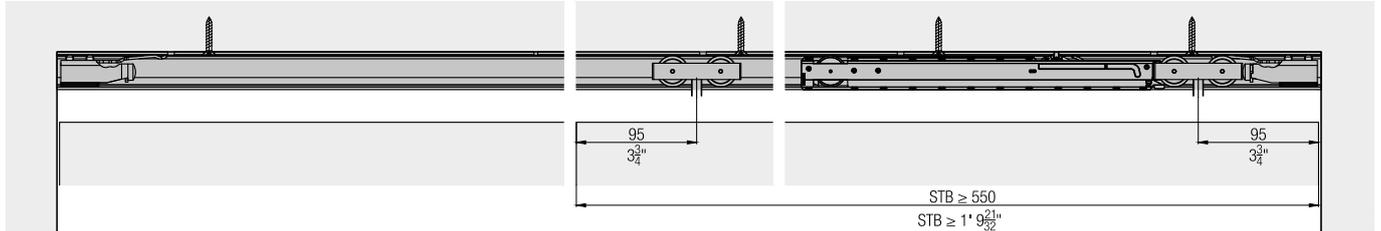

Accessories

- Lock solutions from page 511
- General accessories from page 518
- Glass recommendations from page 536

Planning/execution

Further information about the product can be found on www.hawa.com.