









Set for 1 wooden door up to 16 kg (35 lbs.), with height adjustment

| | No. |
|---|--------------|
| Hawa Clipo 16 H FS, 3-point guide, for 1 door | 053.3298.071 |

Set consisting of:

| | | 053.3298.071 | No. |
|---|---|--------------|--------------|
|  | Running gear, outer door | 2 | 053.3290.172 |
|  | Hawa Clipo 16/Hawa Regal 16 C stopper, plastic, gray | 2 | 053.3215.071 |
|  | Running gear angle, steel, zinc-plated | 2 | 053.3291.171 |
|  | Flat countersunk head chipboard screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated | 10 | 600.0000.478 |
|  | Bottom guide, plastic | 1 | 053.3292.001 |



Running tracks

| | | mm (inch) | No. |
|---|--|----------------------|--------------|
|  | A: Single running track, for glue fixing, aluminum | 2,500 (8' 2 7/16") | 053.3229.250 |
| | | 3,500 (11' 5 25/32") | 053.3229.350 |
| | | 6,000 (19' 8 7/32") | 053.3229.600 |
|  | B: Single running track, with swivel-lug, aluminum (not for hard wood/MDF) | 2,500 (8' 2 7/16") | 053.3227.250 |
| | | 3,500 (11' 5 25/32") | 053.3227.350 |
| | | 6,000 (19' 8 7/32") | 053.3227.600 |
|  | C: Single running track, aluminum, pre-drilled | 2,500 (8' 2 7/16") | 053.3225.250 |
| | | 3,500 (11' 5 25/32") | 053.3225.350 |
| | | 6,000 (19' 8 7/32") | 053.3225.600 |


Track end piece set for single running tracks

| | No. |
|--|--------------|
| Track end piece, for screw fixing, plastic, gray | 053.3210.081 |
| Track end piece, with swivel lug, plastic, gray | 053.3211.081 |

Set consisting of:

| | | 053.3210.081 | 053.3211.081 | No. |
|---|--|--------------|--------------|--------------|
|  | Track-end piece, for screw fixing, plastic, grey | 2 | | 053.3210.001 |
|  | Track-end piece, with swivel lug, plastic, grey | | 2 | 053.3211.071 |





Guide tracks

| | | mm (inch) | No. |
|---|---|----------------------|--------------|
|  | Guide track, groove width 7 mm (9/32"), plastic, anthracite | 2,500 (8' 2 7/16") | 053.3012.250 |
| | | 3,500 (11' 5 25/32") | 053.3012.350 |
| | | 6,000 (19' 8 7/32") | 053.3012.600 |



Soft close up to 8/16 kg (17/35 lbs.)

| | No. |
|---|--------------|
| Soft close Hawa Clipo 16/Hawa Regal C 16, up to 8 kg (17 lbs.) | 053.3332.071 |
| Soft close Hawa Clipo 16/Hawa Regal C 16, up to 16 kg (35 lbs.) | 053.3332.072 |


Set consisting of:

| | | 053.3332.071 | 053.3332.072 | No. |
|--|---|--------------|--------------|--------------|
|  | Damper, up to 8 kg (17 lbs.) | 2 | | 053.3330.071 |
|  | Trigger, with stopper | 2 | 2 | 053.3331.071 |
|  | Cross recessed pan head screw, 2.2x8 mm (3/32"x5/16"), steel, zinc-plated | 2 | 2 | 600.0000.482 |
|  | Damper, up to 16 kg (35 lbs.) | | 2 | 053.3330.072 |


Handle profiles

| | | mm (inch) | No. |
|---|--|------------------------|--------------|
|  | Handle profile, groove for brush seal, for groove mounting, aluminum, anodized, for door thickness of 19 mm (3/4") | 2,500 (8' 2 7/16") | 056.3028.250 |
| | | 6,000 (19' 8 7/32") | 056.3028.600 |
|  | Handle profile, groove for brush seal, for screw fixing, aluminum, anodized, pre-drilled | 2,500 (8' 2 7/16") | 055.3140.250 |
| | | 6,000 (19' 8 7/32") | 055.3140.600 |


Accessories

| | | No. |
|---|-----------------------------|--------------|
|  | Track cleaner, plastic, red | 040.3142.071 |


Further installation examples

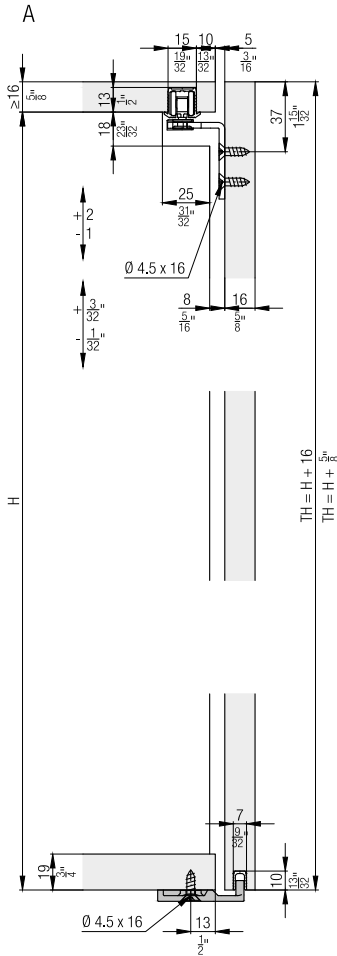

Calculations

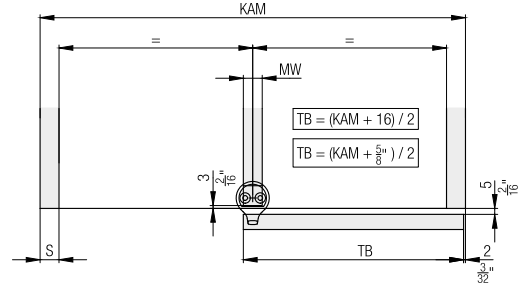

Handle profiles

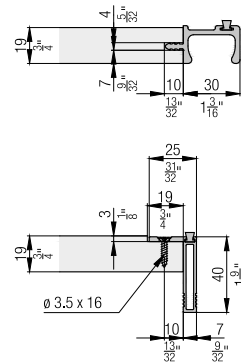

Soft close

| | Z ≥ | |
|-----------------------|-----------|-----------|
| | 1 | 2 |
| Hawa Clipo 16 H IS | 1' 3 3/4" | 1' 1 1/8" |
| Hawa Clipo 16 H MS | 1' 5 1/4" | 2' 1 1/8" |
| Hawa Clipo 16 H FS | 1' 5 1/4" | 2' 1 1/8" |
| Hawa Clipo 16 HM IS | 1' 3 3/4" | 1' 1 1/8" |
| Hawa Clipo 16 GK IS | 1' 3 3/4" | 1' 1 1/8" |
| Hawa Clipo 16 GS IS | 1' 3 3/4" | 1' 1 1/8" |
| Hawa Clipo 16 GPK IS | 1' 3 3/4" | 1' 1 1/8" |
| Hawa Clipo 16 GPPK IS | 1' 3 3/4" | 1' 1 1/8" |

| | Z ≥ | |
|-----------------------|-----|-----|
| | 1 | 2 |
| Hawa Clipo 16 H IS | 400 | 600 |
| Hawa Clipo 16 H MS | 438 | 638 |
| Hawa Clipo 16 H FS | 438 | 638 |
| Hawa Clipo 16 HM IS | 400 | 600 |
| Hawa Clipo 16 GK IS | 400 | 600 |
| Hawa Clipo 16 GS IS | 400 | 600 |
| Hawa Clipo 16 GPK IS | 400 | 600 |
| Hawa Clipo 16 GPPK IS | 400 | 600 |

Accessories

– Straightening fitting from page 236

Planning/execution

Further information about the product can be found on www.hawa.com.