

vitris dura und durus






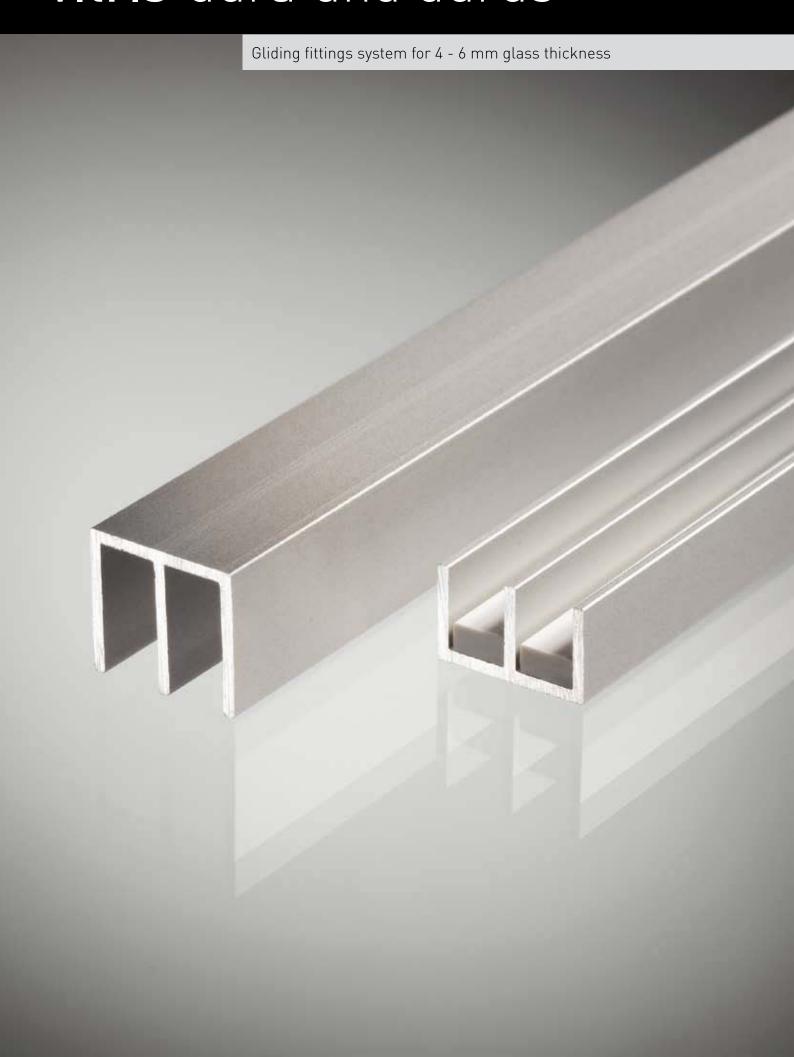

dura / durus up to 6 mm glass thickness

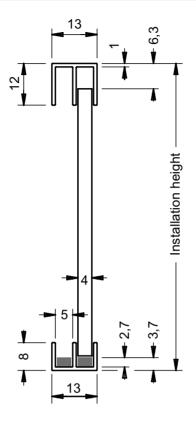

Glass cutting dimensions: installation height ./. 10

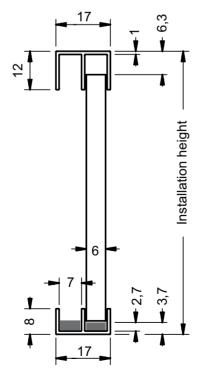

Glass cutting dimensions: installation height ./. 10





dura/	durus	up to 6 mm glass thickness
-------	-------	----------------------------

dura / durus up to 6 mm glass thickness			
Designation	Article number	Specification	
DURA Top twin-guide protected by foil up to 4 mm glass thickness Length: 5 metres	619 010.5000.110	AL E 6 / EV 1 natural	
Bottom gliding track protected by foil Length: 5 metres	619 020.5000.110	ALE6/EV1 natural	
Plastic insert Length: 2,500 mm	619 030.2500.315	Plastic silver effect	
DURUS Top twin-guide protected by foil up to 6 mm glass thickness Length: 5 metres	619 110.5000.110	ALE6/EV1 natural	
Bottom gliding track protected by foil Length: 5 metres	619 120.5000.110	ALE6/EV1 natural	
Plastic insert Length: 2,500 mm	619 130.2500.315	Plastic silver effect	