

Fitting for 2-3 top-running wooden doors up to 36 kg (79 lbs.), with groove mounted running track. With soft and self closing mechanism. Design Inslide.


Product highlights

Flexibility Wide range of applications for sliding door cabinets

in any dimension

Productivity Easy installation with tool-less clip-on system and

convenient height adjustment



Technical specifications


Max. 36 kg (79 lbs.)

↑ Max. 2200 mm (7'2 5/8")

← Max. 1000 mm (3'3 3/8")

↑ 19–25 mm (3/4" to 31/32")

Installation examples

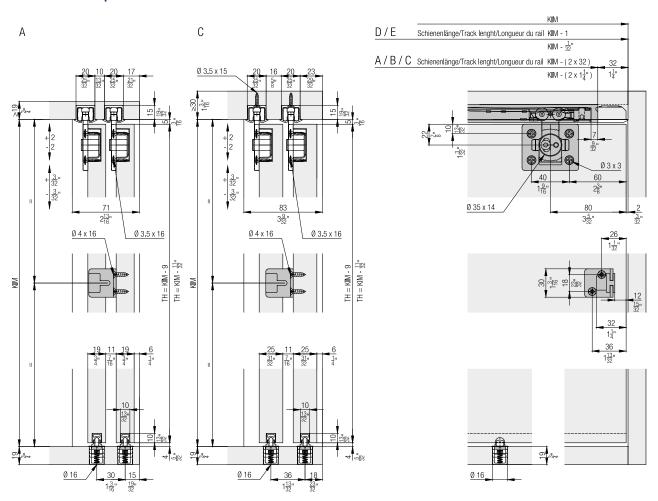

No.

Set for 2 wooden doors up to 36 kg (79 lbs.), with height adjustment

	No.
Hawa Clipo 36 H IS, for 2 doors	053.3353.072

Hawa Clipo 36 H IS, for 2 doors		053.3353.072	
Set consisting	Set consisting of:		
	Running gear double, left	2	053.3346.071
	Running gear double, right	2	053.3347.071
	Stopper, plastic, gray	4	057.3148.071
9	Housing, plastic	4	053.0332.001
212	Fillister head screw, 3.5x16 mm (5/32"x5/8"), steel, zinc-plated	16	766.6052.100
	Follower Hawa Combino/ Hawa Clipo, plastic	1	055.3123.071
	Adapter to follower steel, zinc-plated	1	055.0213.101
	Flat countersunk head chipboard screw 4x16 mm (5/32"x5/8"), steel, zinc-plated	2	600.0000.253
	Bottom guide, plastic, gray	2	055.3081.071

Set for 3 wooden doors up to 36 kg (79 lbs.), with height adjustment

0" 001110 (0 1			
Hawa Clipo 36 H IS, for 3 doors		053.3353.073	
Set consisting of:		053.3353.073	No.
	Running gear double, left	3	053.3346.071
	Running gear double, right	3	053.3347.071
	Stopper, plastic, gray	4	057.3148.071
9	Housing, plastic	6	053.0332.001
	Fillister head screw, 3.5x16 mm (5/32"x5/8"), steel, zinc-plated	24	766.6052.100
\bigcirc	Buffer, with adhesive	2	061.3083.001
	Bottom guide, plastic, gray	3	055.3081.071

Hawa Clipo 36 H IS

Running tracks

		mm (inch)	No.
		2,500 (8' 2 7/16'')	053.3324.250
	A: Single running track, for glue fixing, aluminum, anodized	3,500 (11' 5 25/32'')	053.3324.350
	, , , , , , , , , , , , , , , , , , , ,	6,000 (19' 8 7/32'')	053.3324.600
	B: Single running	2,500 (8' 2 7/16'')	053.3327.250
	track, swivel lug, aluminum, anodized (not for hard wood/	3,500 (11' 5 25/32'')	053.3327.350
	MDF)	6,000 (19' 8 7/32'')	053.3327.600
	C: Single running	2,500 (8' 2 7/16'')	053.3325.250
	track, for screw fixing, aluminum,	3,500 (11' 5 25/32'')	053.3325.350
anodized		6,000 (19' 8 7/32'')	053.3325.600
///	D: Double running track, for screw	2,500 (8' 2 7/16'')	053.3328.250
		3,500 (11' 5 25/32'')	053.3328.350
	thickness of 25 mm (31/32")	6,000 (19' 8 7/32'')	053.3328.600
Garaj .	E: Double running track, for screw fixing, aluminum, anodized, for door thickness of 19 mm (3/4") E: Double running track, for srew fixing,		053.3339.250
			053.3339.350
	aluminum, anodized, for door thickness of 19 mm (3/4'')	6,000 (19' 8 7/32'')	053.3339.600

Track end piece set for single running tracks

	No.
Track-end section, for screw fixing, plastic, gray, 2-piece set	053.3354.071
Track-end section, swivel lug, plastic, gray, 2-piece set	053.3355.051

Set consisting	of:	053.3354.071	053.3355.051	No.
	Track-end piece, for screw fixing, plastic	2		053.0334.001
	Chipboard screw, 4x12 mm (5/32"x15/32"), steel, zinc-plated	2		600.0000.704
	Track-end piece, with swivel lug, plastic		2	053.3351.071

Guide tracks

		mm (inch)	No.
		2,500 (8' 2 7/16") 055.3171.2	
	Guide track, for glue fixing, plastic, gray	3,500 (11' 5 25/32'')	055.3171.350
		6,000 (19' 8 7/32'')	055.3171.600

Panels

		mm (inch)	No.
//.		2,500 (8' 2 7/16")	053.5050.250
	Panel for 053.3339., aluminum, anodized	3,500 (11' 5 25/32'')	053.5050.350
		6,000 (19' 8 7/32'')	053.5050.600

Clip-on components

		No.
0	Clip component for wooden panel, for 053.3339, every 700-800 mm (2' 3 9/16" to 2' 7 15/32"), aluminum, pre-drilled	053.5051.001

Soft close up to 15/26/36 kg (33/57/79 lbs.)

	No.
Soft close, up to 15 kg (33 lbs.)	057.3159.071
Soft close, up to 26 kg (57 lbs.)	057.3159.072
Soft close, up to 40 kg (88 lbs.)	057.3159.073

Cort closes, up to 10 kg (co ibc.)					
Set consisting	of:	057.3159.071	057.3159.072	057.3159.073	No.
	Soft close, up to 15 kg (33 lbs.)	2			057.3156.071
	Release piece soft close	2	2	2	057.0182.101
213	Thread rolling rounded head screw, M2.5x5 mm (3/32"x3/16"), steel, zinc-plated	2	2	2	600.0000.764
	Soft close, up to 26 kg (57 lbs.)		2		057.3156.072
	Soft close, up to 40 kg (88 lbs.)			2	057.3156.073

	mm (inch)	No.
Single guide track, for glue fixing, aluminum, anodized	6,000 (19' 8 7/32'')	053.3296.600

Components 4-point guidance

Guide tracks 4-point guidance

	No.
Bottom guide Hawa Clipo IS/Hawa Regal C 16, plastic, anthracite	040.3124.071
Stopper guide track, plastic, grey	053.5094.071

Door centering


			No.
Door centering, plastic, anthracite, for 2 doors			053.3207.071
Set consisting of:		053.3207.071	No.
	Housing door centering, plastic, anthracite	2	053.5014.001
	Pin door centering, plastic, anthracite	2	053.0171.001
0	Rubber buffer, plastic, grey	1	025.0107.001

Accessories


	No.
Track cleaner, plastic, red	040.3142.071


Hawa Clipo 36 H IS

Further installation examples

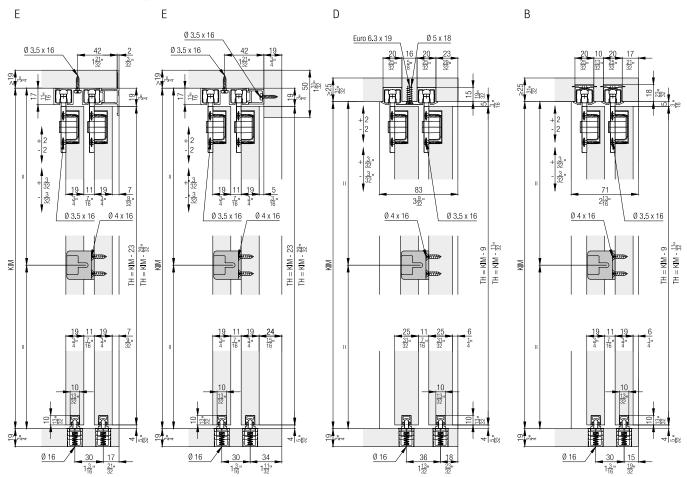


Calculations







4 point guidance



Door centering



Soft close

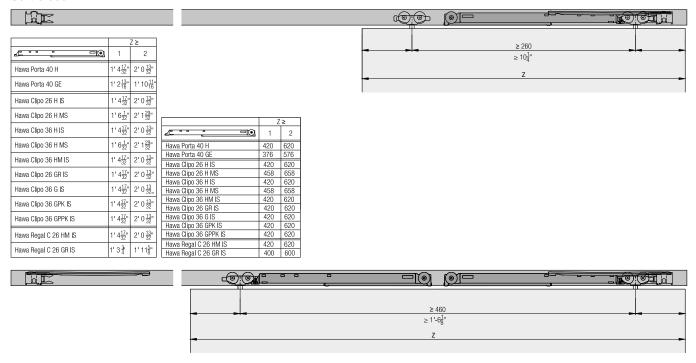

Accessories

- Straightening fitting from page 236

Planning/execution

Further information about the product can be found on www.hawa.com.