Fitting for 2–3 bottom-running wooden doors (19/25 mm) up to 50 kg (110 lbs.) with screwed on running track and integrated soft close. Design Mixslide

Product highlights

Comfort Sophisticated soft closing system and innovation

arrangement of the components for very easy

operation

Aesthetics Bottom-running system that supports the entire door

weight on the base makes cabinet designs with thin

materials possible

Technical specifications

Max. 50 kg (110 lbs.)


↑ Max. 2400 mm (7'10 7/16'')


↔ Max. 1400 mm (4'7 1/8'')

↑ 19/25 mm (3/4'' or 31/32'')



Installation examples

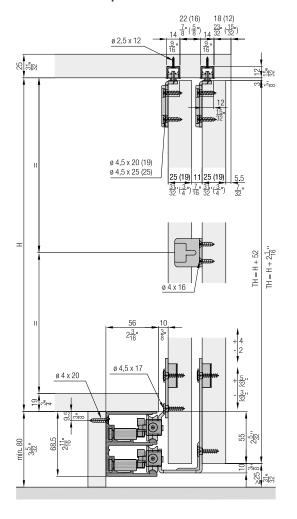

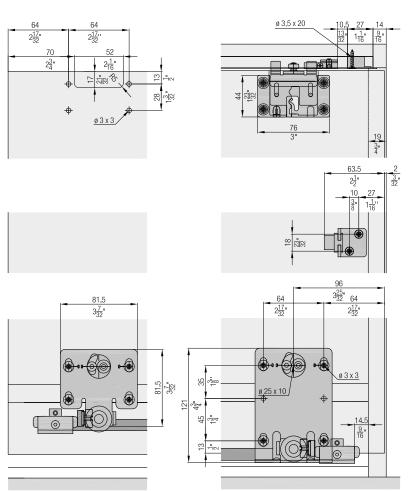

Set for 2 or 3 wooden doors, 19 mm (3/4")

| | No. |
|-------------------------------------------------------------------|--------------|
| Hawa Combino 50 H MS, door thickness 19 mm (3/4"), for 2 doors | 055.3199.071 |
| Hawa Combino 50 H MS, door thickness 19 mm (3/4"), for 3 doors | 055.3199.073 |

| Set consisting | of: | 055.3199.071 | 055.3199.073 | No. |
|----------------|---------------------------------------------------------------------|--------------|--------------|--------------|
| 0.00 · 0.00 | Running gear, einerior door, steel, zinc-plated | 2 | 4 | 055.3169.071 |
| | Running gear, exterior door, 19 mm (3/4"), steel, zinc-plated | 2 | 2 | 055.3113.175 |
| | Guide bracket, steel, zinc-plated | 4 | 6 | 055.3059.171 |
| En Mag | Guide bracket housing, plastic, anthracite | 4 | 6 | 055.0282.001 |
| | Anti-derailment device, plastic, red | 4 | 6 | 055.0186.001 |
| | Stopper, plastic, gray | 4 | 4 | 055.3167.071 |
| | Retention spring for stopper, plastic, gray | 2 | 3 | 055.0204.001 |
| | Stopper guide, plastic, gray | 4 | 4 | 040.3079.074 |
| | Door follower, with 2 doors, steel, zinc-plated | 1 | | 055.3124.071 |
| | Track end piece, plastic, gray, 31 mm (1 7/32") | 3 | 4 | 040.3083.002 |
| | Track end piece, plastic, gray, 22 mm (7/8") | 1 | | 040.3083.003 |
| | Washer-and-screw assembly, 4.5x17 mm, steel, zinc-plated | 16 | 24 | 055.0100.101 |
| | Countersunk head screw, 4.5x20 mm, steel, zinc-plated | 16 | 24 | 600.0000.167 |
| | Countersunk head screw, 3.5x20 mm, steel, zinc-plated | 4 | 4 | 766.5035.120 |
| 90 | Door follower, with 3 doors, 2-piece set, steel, zinc-plated | | 1 | 056.3095.171 |
| | Buffer, with adhesive, 2-piece set | | 1 | 053.3364.051 |
| | | | | |

Set for 2 or 3 wooden doors, 25 mm (31/32")

| | No. |
|---------------------------------------------------------------------|--------------|
| Hawa Combino 50 H MS, door thickness 25 mm (31/32"), for 2 doors | 055.3199.072 |
| Hawa Combino 50 H MS, door thickness 25 mm (31/32"), for 3 doors | 055.3199.074 |

| | , ,, | | | |
|----------------|------------------------------------------------------------------------|--------------|--------------|--------------|
| Set consisting | of: | 055.3199.072 | 055.3199.074 | No. |
| | Running gear, einerior door, steel, zinc-plated | 2 | 4 | 055.3169.071 |
| الله الله | Running gear, exterior door, 25 mm (31/32''), steel, zinc-plated | 2 | 2 | 055.3114.175 |
| | Guide bracket, steel, zinc-plated | 4 | 6 | 055.3059.171 |
| Endad | Guide bracket housing, plastic, anthracite | 4 | 6 | 055.0282.001 |
| Q | Anti-derailment device, plastic, red | 4 | 6 | 055.0186.001 |
| | Stopper, plastic, gray | 4 | 4 | 055.3167.071 |
| | Retention spring for stopper, plastic, gray | 2 | 3 | 055.0204.001 |
| | Stopper guide, plastic, gray | 4 | 4 | 040.3079.074 |
| | Door follower, with 2 doors, steel, zinc-plated | 1 | | 055.3124.071 |
| | Track end piece, plastic, gray, 31 mm (1 7/32") | 3 | 4 | 040.3083.002 |
| | Track end piece, plastic, gray, 22 mm (7/8") | 1 | | 040.3083.003 |
| ** © | Washer-and-screw assembly, 4.5x17 mm, steel, zinc-plated | 16 | 24 | 055.0100.101 |
| | Countersunk head screw, 4.5x25 mm, steel, zinc-plated | 16 | 24 | 766.5045.125 |
| • | Countersunk head screw, 3.5x20 mm, steel, zinc-plated | 4 | 4 | 766.5035.120 |
| 90 | Door follower, with 3 doors, 2-piece set, steel, zinc-plated | | 1 | 056.3095.171 |
| | Buffer, with adhesive, 2-piece set | | 1 | 053.3364.051 |

Running tracks

mm No. (inch) 2500 055.3160.250 (8'2 7/16'') Double running track, aluminum, anodized, 3500 (11'5 25/32'') 055.3160.350 pre-drilled, for soft close 6000 055.3160.600 (19'8 7/32'')

Soft close

| | No. |
|--------------------------------------------------------------|--------------|
| Hawa Combino 50 H MS/FS, up to 50 kg (110 lbs.), 2 pieces | 055.3215.071 |
| Hawa Combino 50 H MS/FS, up to 50 kg (110 lbs.), 4 pieces | 055.3215.072 |

Guide tracks

| | (inch) | No. |
|-----------------------------------------|------------------------|--------------|
| | 2500 (8'2 7/16'') | 056.3079.250 |
| Guide track, alu- minum, pre-drilled | 3500 (11'5 25/32'') | 056.3079.350 |
| | 6000 (19'8 7/32'') | 056.3079.600 |

| Set consisting of: | | | 055.3215.072 | No. |
|--------------------|--------------------------------------------------------|---|--------------|--------------|
| | Soft close, left, up to 50 kg (110 lbs.) | 1 | 2 | 055.3166.072 |
| | Soft close, right, up to 50 kg (110 lbs.) | 1 | 2 | 055.3166.071 |
| | Activator soft close | 2 | 4 | 055.3165.071 |
| | Stopper extension, plastic, gray | 2 | | 055.3168.071 |
| *MIN | Thread-cutting head screw, M4x8 mm, steel, zinc-plated | 2 | 4 | 600.0000.344 |

Stopper extension


For use without soft close order 4 pieces


| | | No. |
|--|----------------------------------|--------------|
| | Stopper extension, plastic, gray | 055.3168.071 |

Accessories


| | | No. |
|--|---------------------------------------------------------------------|--------------|
| | Drilling and milling jig, for processing guide brackets, wood | 055.3099.001 |

Track end piece







Handle profiles





Calculations






Soft close

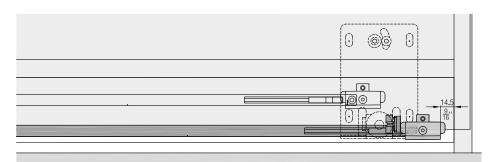



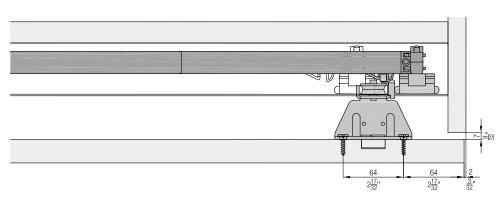

Accessories

- Straightening fitting from page 266Handle profiles from page 268
- Order overview soft close from page 270

Planning/execution

Further information about the product can be found on www.hawa.com.