






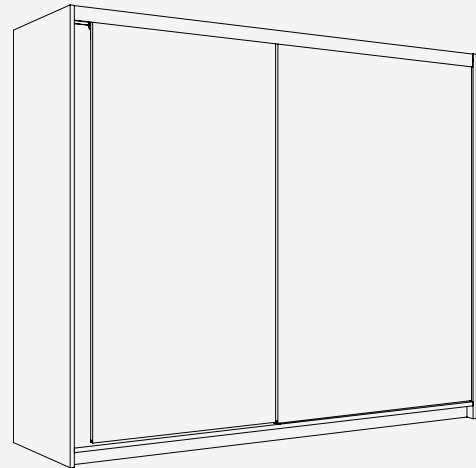
Fitting for 2-3 top-running wooden doors up to 35 kg (77 lbs.), with screwed on running track and wooden or aluminum clip panel. Soft close optional. Design Inside.

Product highlights


-  **Comfort** High operating convenience thanks to proven running system and optional soft closing technology
-  **Productivity** No cabinet processing, high degree of pre-assembly and access from the front for easy, quick installation

Technical specifications

-  Max. 35 kg (77 lbs.)
-  Max. 2200 mm (7'2 5/8")
-  Max. 1200 mm (3'11 1/4")
-  19 mm (3/4")









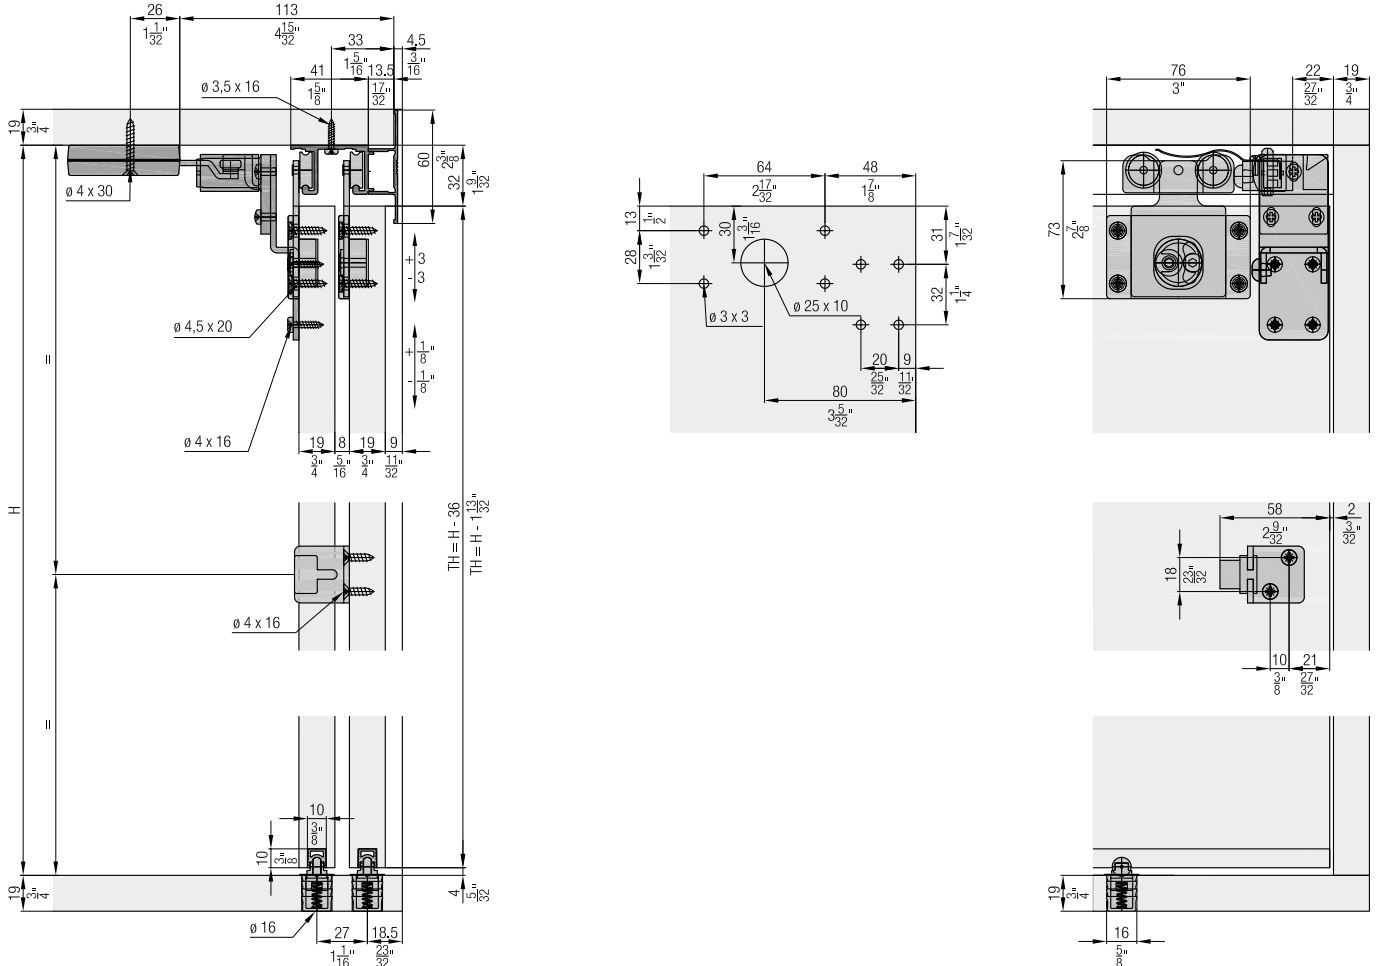

Installation examples





Set for 2 or 3 wooden doors

	No.
Hawa Combino 35 H IS, for 2 doors	056.3180.073
Hawa Combino 35 H IS, for 3 doors	056.3180.077


Set consisting of:

		056.3180.073	056.3180.077	No.
	Running gear, steel, zinc-plated	4	6	056.3177.171
	Running gear housing, plastic, anthracite	4	6	056.3175.001
	Bottom guide, plastic, gray	2	3	055.3081.071
	Stopper, plastic, gray	2	1	056.3189.071
	Stopper, with retention spring, plastic, gray	2	3	056.3189.072
	Door follower, with 2 doors, steel, zinc-plated	1		055.3124.071
	Countersunk head screw, 4.5x20 mm, steel, zinc-plated	16	24	600.0000.167
	Buffer, with adhesive, 3-piece set		1	061.3083.050


Running tracks

		mm (inch)	No.
	Single running track, aluminum, pre-drilled	2500 (8'2 7/16")	056.3011.250
		3500 (11'5 25/32")	056.3011.350
		6000 (19'8 7/32")	056.3011.600
	Double running track, aluminum, pre-drilled	2500 (8'2 7/16")	056.3010.250
		3500 (11'5 25/32")	056.3010.350
		6000 (19'8 7/32")	056.3010.600

Guide tracks

		mm (inch)	No.
	Guide track, plastic, gray, for glue fixing	2500 (8'2 7/16")	055.3171.250
		3500 (11'5 25/32")	055.3171.350
		6000 (19'8 7/32")	055.3171.600







Panels

		mm (inch)	No.
	Clip-on panel, aluminum, anodized	2500 (8'2 7/16")	056.3174.250
		3500 (11'5 25/32")	056.3174.350
		6000 (19'8 7/32")	056.3174.600

Soft close (only for system with 2 doors)
Adapter soft close must be ordered separately

	No.
Soft close, 18–40 kg (40–88 lbs.), with wide follower, 2 pieces	055.3091.073






Set consisting of:

		055.3091.073	No.
	Soft close, left, 18–40 kg (40–88 lbs.)	1	055.3090.073
	Soft close, right, 18–40 kg (40–88 lbs.)	1	055.3090.074
	Follower, for soft close, right, plastic, gray	1	055.3040.071
	Follower, for soft close, left, plastic, gray	1	055.3040.072
	Fillister head screw, 4x16 mm, steel, zinc-plated	6	600.0000.166
	Countersunk head screw, 4x30 mm, steel, zinc-plated	4	600.0000.439


Adapter soft close for No. 055.3091.073

	No.
Adapter set, for soft close	055.3043.073

Set consisting of:

		055.3043.073	No.
	Adapter, for soft close, exterior door, steel, zinc-plated	1	055.0133.101
	Adapter, for soft close, interior door, steel, zinc-plated	1	055.0128.101
	Rounded head screw, M4x8 mm, steel, zinc-plated	6	759.0408.108
	Fillister head screw, 4x16 mm, steel, zinc-plated	8	600.0000.166
	Rubber buffer, plastic, grey	1	025.0107.001

Soft close (only for system with 2 doors)

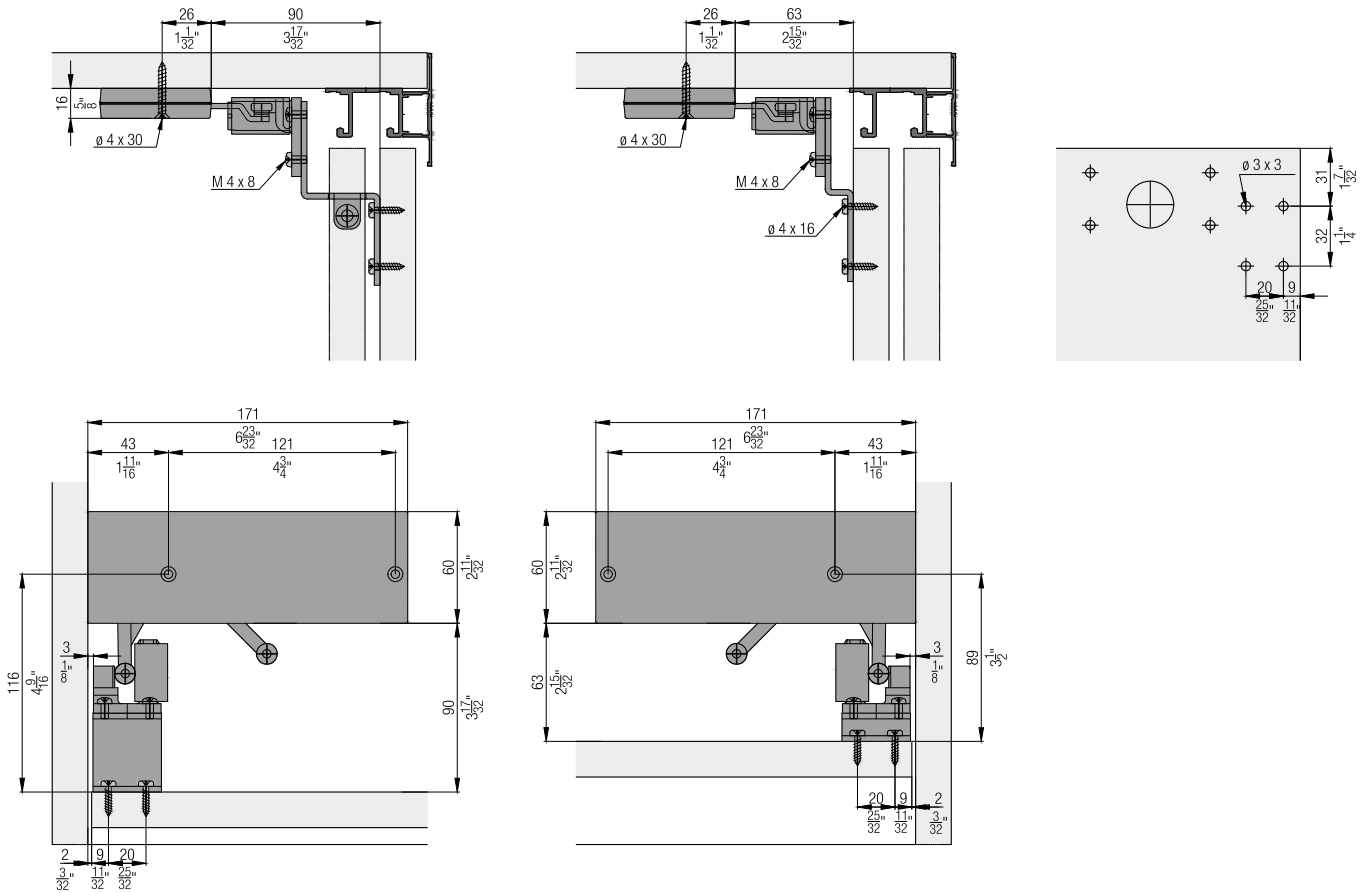

Accessories

- Straightening fitting from page 266
- Handle profiles from page 268
- Order overview soft close from page 270

Planning/execution

Further information about the product can be found on www.hawa.com.