

Fitting for 2 top-running wooden doors up to 16 kg (35 lbs.), with groove mounted running track. With soft and self closing mechanism. Design Mixslide.

Product highlights


- Comfort Smooth, silent running with Comfort Roller and soft and self closing system for different door weights
- Aesthetics No groove in the base, and no visible guide



\triangle	Max.						
$\stackrel{\wedge}{\downarrow}$	Max.	1400 mm (4'7 1/8'')					
$\stackrel{\leftarrow}{=}$	Max.	1000 mm (3'3 3/8'')					
$\rightarrow [] \leftarrow$		16–19 mm (5/8'' to 3/4'')					



Installation examples

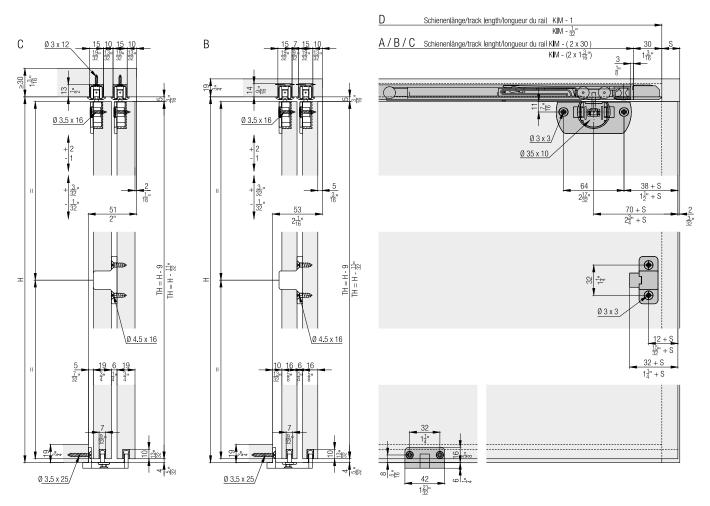

Set for 2 wooden doors up to 16 kg (35 lbs.), with height adjustment

	No.				
Hawa Clipo 16 H	053.3221.071				
Set consisting	053.3221.071	No.			
	Hawa Clipo 16 H/Hawa Regal 16 C running gear, plastic, anthracite	4	053.3205.071		
and and	Hawa Clipo 16/Hawa Regal 16 C stopper, plastic, gray				
er the	4	053.0183.001			
2US	Fillister head screw, 3.5x16 mm (5/32"x5/8"), steel, zinc-plated	8	766.6052.100		
	Door follower, plastic, anthracite	1	053.3217.071		
LI S	Flat countersunk head chipboard screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated	2	600.0000.478		
	Bottom guide, plastic, anthracite	1	053.3232.171		
A.S.	Flat countersunk head chipboard screw, 3.5x25 mm (5/32"x31/32"), steel, zinc-plated	2	766.5035.125		

Running tracks

		mm (inch)	No.
////		2,500 (8' 2 7/16'')	053.3229.250
	A: Single running track, for glue fixing, aluminum	3,500 (11' 5 25/32'')	053.3229.350
*		6,000 (19' 8 7/32'')	053.3229.600
	B: Single running track, with swivel-lug, aluminum (pas pour bois dur/MDF)	2,500 (8' 2 7/16'')	053.3227.250
	B: Single running track, with swivel-lug, aluminum	3,500 (11' 5 25/32'')	053.3227.350
		6,000 (19' 8 7/32'')	053.3227.600
		2,500 (8' 2 7/16'')	053.3225.250
	C: Single running track, aluminum, pre-drilled	3,500 (11' 5 25/32'')	053.3225.350
₩¥		6,000 (19' 8 7/32'')	053.3225.600
1 // / /	/	2,500 (8' 2 7/16'')	053.3226.250
	D: Double running track, aluminum, pre-drilled	3,500 (11' 5 25/32'')	053.3226.350
<u> </u>		6,000 (19' 8 7/32'')	053.3226.600

Track end piece set for single running tracks

				No.
Track end piece	053.3210.081			
Track end piece	, with swivel lug, plastic, gra	ay		053.3211.081
Set consisting of:		053.3210.081	053.3211.081	No.
	Track-end piece, for screw fixing, plastic, grey	2		053.3210.001
S	Track-end piece, with swivel lug, plastic, grey		2	053.3211.071

Guide tracks

	mm (inch)	No.
	2,500 (8' 2 7/16'')	053.3012.250
Guide track, groove width 7 mm (9/32''), plastic, anthracite	3,500 (11' 5 25/32'')	053.3012.350
	6,000 (19' 8 7/32'')	053.3012.600



Soft close up to 8/16 kg (17/35 lbs.)

	No.			
Soft close Hawa up to 8 kg (17 lb	a Clipo 16/Hawa Regal C 16 s.)	,		053.3332.071
Soft close Hawa up to 16 kg (35 l	a Clipo 16/Hawa Regal C 16 bs.)	,		053.3332.072
Set consisting of:				No.
Colored and the second	Damper, up to 8 kg (17 lbs.)			
8	Trigger, with stopper			
2US	2	2	600.0000.482	
Col.	Damper, up to 16 kg (35 lbs.)		2	053.3330.072

Accessories

	No.
Housing Hawa Clipo 16, press-fit, plastic, anthracite	083.3009.002
Track cleaner, plastic, red	040.3142.071

Handle profiles


	mm (inch)	No.
Handle profile, groove for brush	2,500 (8' 2 7/16'')	055.3140.250
seal, for screw fixing, aluminum, anodized, pre-drilled	6,000 (19' 8 7/32'')	055.3140.600

Door centering


	No.		
Door centering,		053.3207.071	
Set consisting of:			No.
Ð	Housing door centering, plastic, anthracite		053.5014.001
Pin door centering, plastic, anthracite		2	053.0171.001
0)	Rubber buffer, plastic, grey	1	025.0107.001




Further installation examples

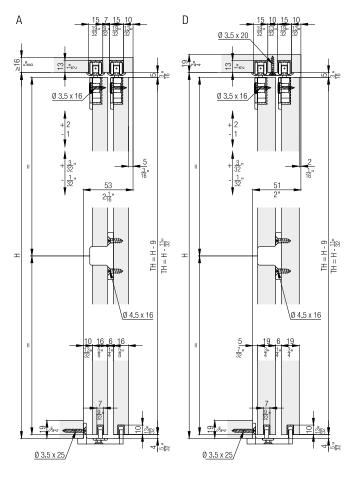


Calculations

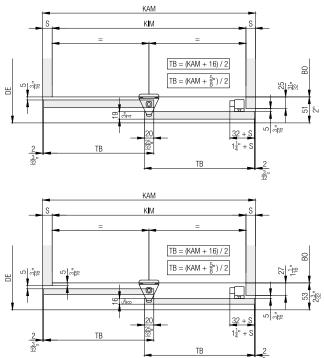


Housing for press-fitting



Door centering



Handle profiles



Soft close

					Care Cont			
	Z	≥ 2		-			≥ 260 ≥ 10 ¹ / ₄	
Hawa Clipo 16 H IS	1' 3 <u>3</u> "	1' 11 § "					Z	
Hawa Clipo 16 H MS	1' 5 <u>1</u> "	2' 1 <u>1</u> "	Z≥					
Hawa Clipo 16 H FS	1' 5 <u>1</u> "	2' 1 1 "		2				
Hawa Clipo 16 HM IS	1'3 <u>3</u> "	1' 11 5 "		500 538				
Hawa Clipo 16 GK IS	1' 3 <u>3</u> "	1' 11 5 "	Hawa Clipo 16 H FS 438 4	538				
Hawa Clipo 16 GS IS	1' 3 <u>3</u> "	1' 115"		500 500				
Hawa Clipo 16 GPK IS	1' 3 <u>3</u> "	1' 11 5 "	Hawa Clipo 16 GS IS 400 (500				
Hawa Clipo 16 GPPK IS	1' 3 <u>3</u> "	1' 115"		500 500				
						≥ 460 $\geq 1^{1} \cdot 6^{1^{n}}_{5^{n}}$ Z		

Accessories - Straightening fitting from page 236 **Planning/execution** Further information about the product can be found on www.hawa.com.