








Fitting for 2-3 top-running wooden doors up to 26 kg (57 lbs.), with groove mounted running track. With soft and self closing mechanism. Design Mixslide.

Product highlights


-  **Comfort** Quiet, smooth running and soft and self closing system for different door weights
-  **Productivity** Easy installation with tool-less clip-on system and convenient height adjustment

Technical specifications

-  Max. 26 kg (57 lbs.)
-  Max. 2200 mm (7'2 5/8")
-  Max. 1000 mm (3'3 3/8")
-  19 mm (3/4")

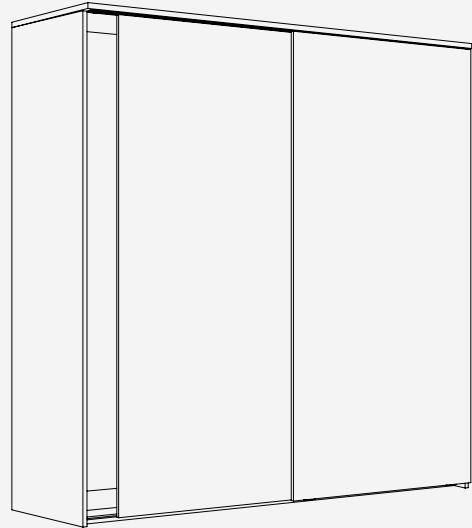


Installation examples

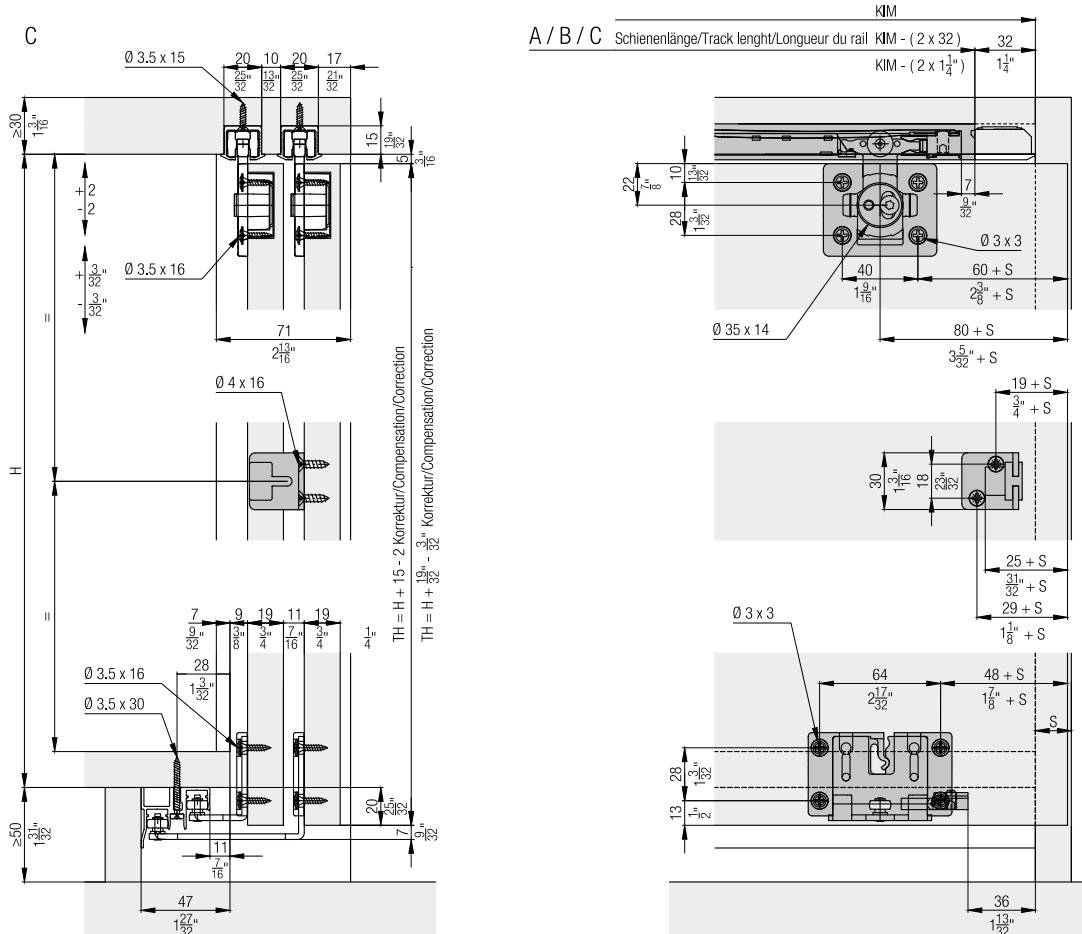

Subject to technical modifications. Metric specifications are exact. Inches are approximate.






**Set for 2 wooden doors up to 26 kg (57 lbs.),
with height adjustment**

	No.
Hawa Clipo 26 H MS, for 2 doors	053.3356.071




Set consisting of:		053.3356.071	No.
	Running gear, left	2	053.3349.071
	Running gear, right	2	053.3348.071
	Stopper, plastic, gray	4	057.3148.071
	Housing, plastic	4	053.0332.001
	Fillister head screw, 3.5x16 mm (5/32"x5/8"), steel, zinc-plated	32	766.6052.100
	Follower Hawa Combino/Hawa Clipo, plastic	1	055.3123.071
	Adapter to follower steel, zinc-plated	1	055.0213.101
	Flat countersunk head chipboard screw 4x16 mm (5/32"x5/8"), steel, zinc-plated	2	600.0000.253
	Guide bracket, interior door, steel, zinc-plated	2	055.3107.171
	Guide bracket, exterior door, 19 mm (3/4"), steel, zinc-plated	2	055.3109.171
	Guide bracket housing, plastic, anthracite	4	053.3064.001
	Stopper guide, plastic, gray	4	040.3079.074

**Set for 3 wooden doors up to 26 kg (57 lbs.),
with height adjustment**

	No.
Hawa Clipo 26 H MS, for 3 doors	053.3356.072




Set consisting of:		053.3356.072	No.
	Running gear, left	3	053.3349.071
	Running gear, right	3	053.3348.071
	Stopper, plastic, gray	4	057.3148.071
	Housing, plastic	6	053.0332.001
	Fillister head screw, 3.5x16 mm (5/32"x5/8"), steel, zinc-plated	48	766.6052.100
	Buffer, with adhesive	2	061.3083.001
	Guide bracket, interior door, steel, zinc-plated	4	055.3107.171
	Guide bracket, exterior door, 19 mm (3/4"), steel, zinc-plated	2	055.3109.171
	Guide bracket housing, plastic, anthracite	6	053.3064.001
	Door follower, steel, zinc-plated, with 3 doors	2	055.3126.171
	Thread-cutting rounded head screw, M4x8 mm (5/32"x5/16"), steel, zinc-plated	2	600.0000.328
	Stopper guide, plastic, gray	4	040.3079.074

Running tracks


		mm (inch)	No.
	A: Single running track, for glue fixing, aluminum, anodized	2,500 (8' 2 7/16")	053.3324.250
		3,500 (11' 5 25/32")	053.3324.350
		6,000 (19' 8 7/32")	053.3324.600
	B: Single running track, swivel lug, aluminum, anodized (not for hard wood/ MDF)	2,500 (8' 2 7/16")	053.3327.250
		3,500 (11' 5 25/32")	053.3327.350
		6,000 (19' 8 7/32")	053.3327.600
	C: Single running track, for screw fixing, aluminum, anodized	2,500 (8' 2 7/16")	053.3325.250
		3,500 (11' 5 25/32")	053.3325.350
		6,000 (19' 8 7/32")	053.3325.600

Track end piece set for single running tracks

	No.
Track-end section, for screw fixing, plastic, gray, 2-piece set	053.3354.071
Track-end section, swivel lug, plastic, gray, 2-piece set	053.3355.051





		053.3354.071	053.3355.051	No.
Set consisting of:				
	Track-end piece, for screw fixing, plastic	2		053.0334.001
	Chipboard screw, 4x12 mm (5/32"x15/32"), steel, zinc-plated	2		600.0000.704
	Track-end piece, with swivel lug, plastic		2	053.3351.071

Guide tracks


		mm (inch)	No.
	Double guide track, for screw fixing, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	056.3072.250
		3,500 (11' 5 25/32")	056.3072.350
		6,000 (19' 8 7/32")	056.3072.600

Soft close up to 15/26 kg (33/57 lbs.)


	No.
Soft close, up to 15 kg (33 lbs.)	057.3159.071
Soft close, up to 26 kg (57 lbs.)	057.3159.072

		057.3159.071	057.3159.072	No.
Set consisting of:				
	Soft close, up to 15 kg (33 lbs.)	2		057.3156.071
	Release piece soft close	2	2	057.0182.101
	Thread rolling rounded head screw, M2.5x5 mm (3/32"x3/16"), steel, zinc-plated	2	2	600.0000.764
	Soft close, up to 26 kg (57 lbs.)		2	057.3156.072


Handle profiles

		mm (inch)	No.
	Handle profile, groove for brush seal, for screw fixing, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	055.3140.250
		6,000 (19' 8 7/32")	055.3140.600


Accessories

		No.
	Track cleaner, plastic, red	040.3142.071


Further installation examples

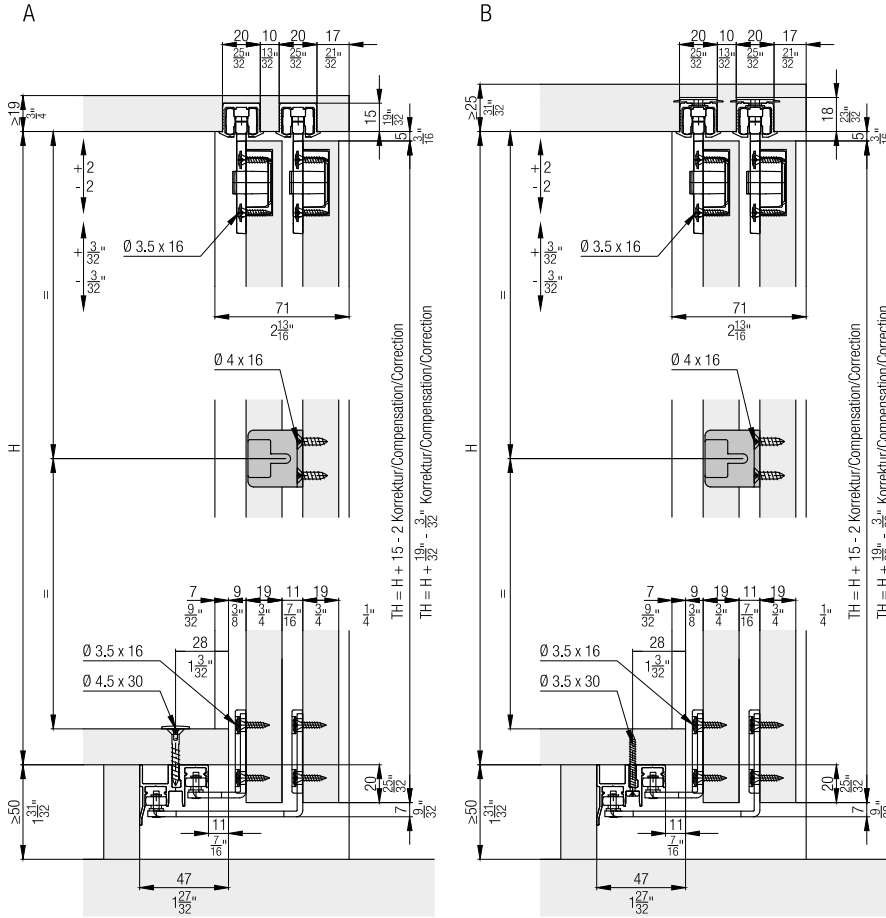

Handle profiles



Calculations


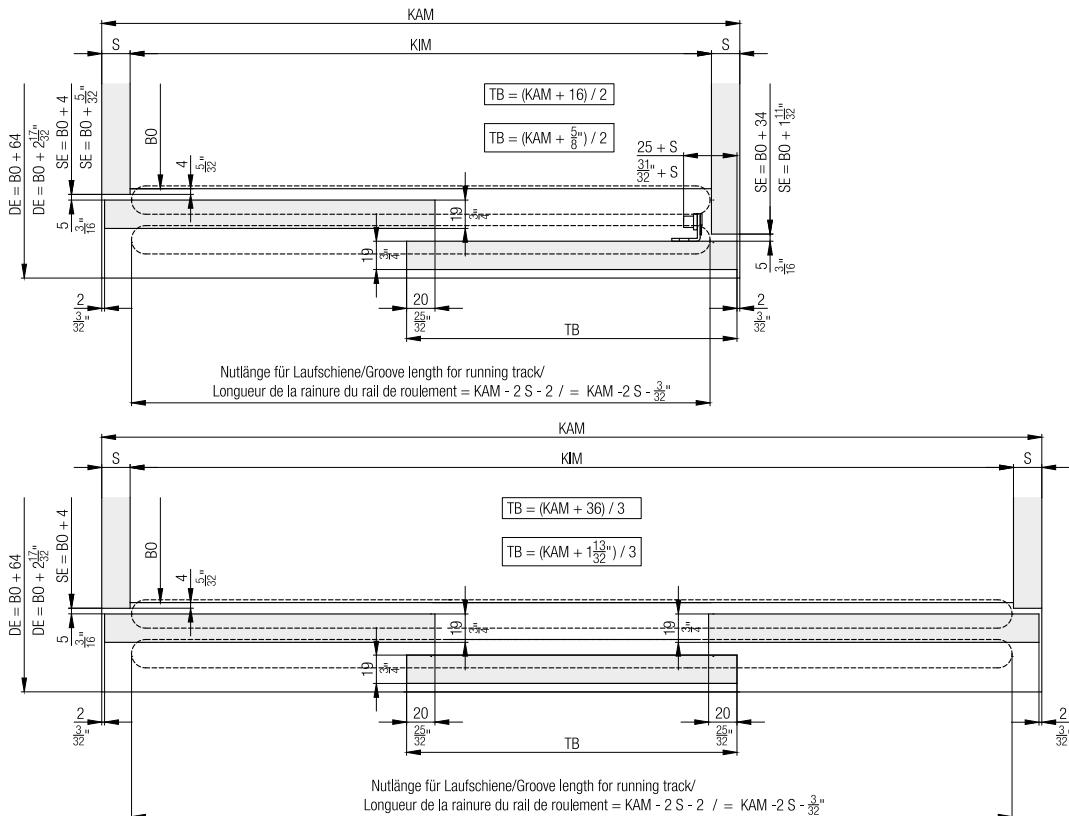


Soft close



	Z ≥	
	1	2
Hawa Porta 40 H	1' 4 $\frac{17}{32}$ "	2' 0 $\frac{13}{32}$ "
Hawa Porta 40 GE	1' 2 $\frac{13}{16}$ "	1' 10 $\frac{11}{16}$ "
Hawa Clipo 26 H IS	1' 4 $\frac{17}{32}$ "	2' 0 $\frac{13}{32}$ "
Hawa Clipo 26 H MS	1' 6 $\frac{1}{32}$ "	2' 1 $\frac{29}{32}$ "
Hawa Clipo 36 H IS	1' 4 $\frac{17}{32}$ "	2' 0 $\frac{13}{32}$ "
Hawa Clipo 36 H MS	1' 6 $\frac{31}{32}$ "	2' 1 $\frac{29}{32}$ "
Hawa Clipo 36 HM IS	1' 4 $\frac{17}{32}$ "	2' 0 $\frac{13}{32}$ "
Hawa Clipo 26 GR IS	1' 4 $\frac{17}{32}$ "	2' 0 $\frac{13}{32}$ "
Hawa Clipo 36 G IS	1' 4 $\frac{17}{32}$ "	2' 0 $\frac{13}{32}$ "
Hawa Clipo 36 GPK IS	1' 4 $\frac{17}{32}$ "	2' 0 $\frac{13}{32}$ "
Hawa Clipo 36 GPPK IS	1' 4 $\frac{17}{32}$ "	2' 0 $\frac{13}{32}$ "
Hawa Regal C 26 HM IS	1' 4 $\frac{17}{32}$ "	2' 0 $\frac{13}{32}$ "
Hawa Regal C 26 GR IS	1' 3 $\frac{3}{4}$ "	1' 11 $\frac{5}{8}$ "

	Z ≥	
	1	2
Hawa Porta 40 H	420	620
Hawa Porta 40 GE	376	576
Hawa Clipo 26 H IS	420	620
Hawa Clipo 26 H MS	458	658
Hawa Clipo 36 H IS	420	620
Hawa Clipo 36 H MS	458	658
Hawa Clipo 36 HM IS	420	620
Hawa Clipo 26 GR IS	420	620
Hawa Clipo 36 G IS	420	620
Hawa Clipo 36 GPK IS	420	620
Hawa Clipo 36 GPPK IS	420	620
Hawa Regal C 26 HM IS	420	620
Hawa Regal C 26 GR IS	400	600

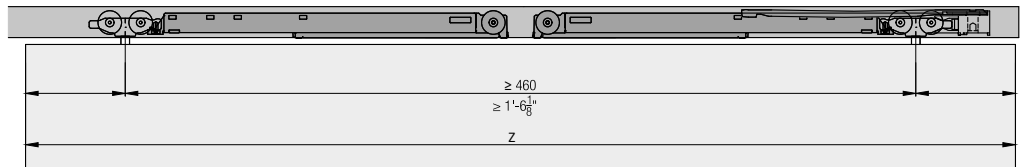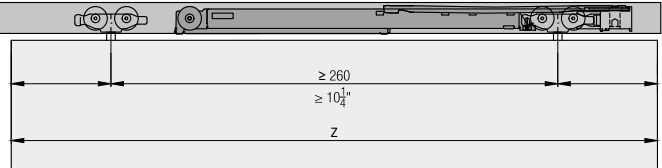

Accessories

– Straightening fitting from page 236

Planning/execution

Further information about the product can be found on www.hawa.com.