


Fitting for top-running glass doors up to 40 kg (88 lbs.), with surface mounted running track or running track flush with the ceiling. Optionally with soft and self closing mechanism. Wall or ceiling mounting. Minimal installation height.

Product highlights






-  **Productivity** Easy height adjustment via both suspensions on completely installed door
-  **Aesthetics** Cover caps in different design versions

Technical specifications


-  Max. 40 kg (88 lbs.)
-  Max. 4000 mm (13'1 15/32")
-  Max. 3000 mm (9'10 1/8")
-  8–12.7 mm (5/16" to 1/2")

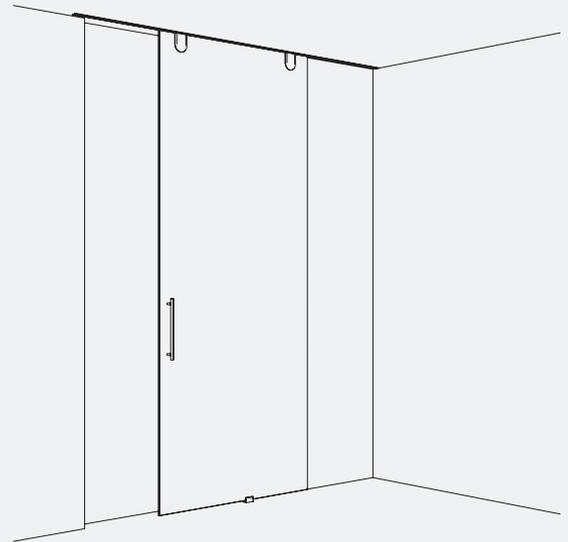


Installation examples

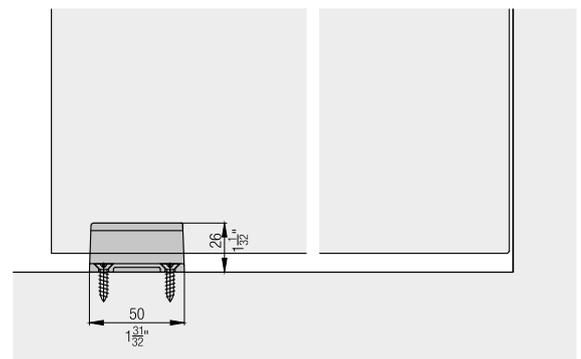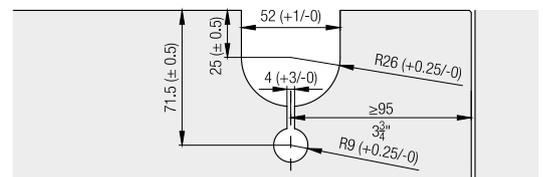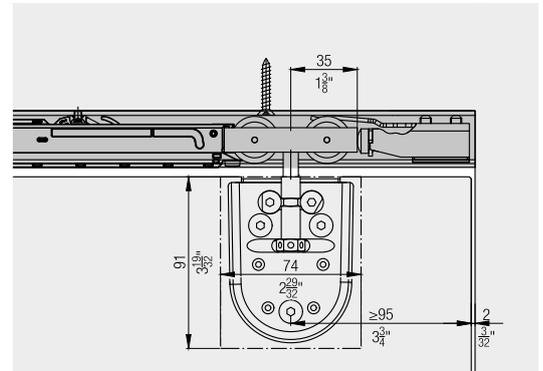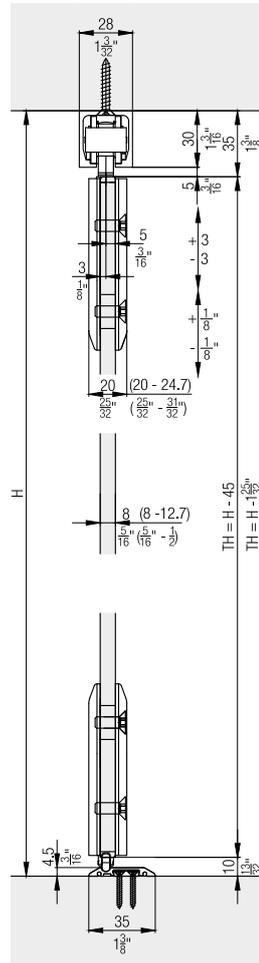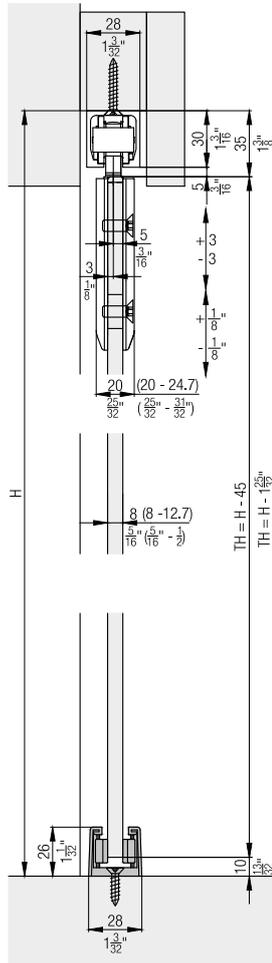


Further installation examples

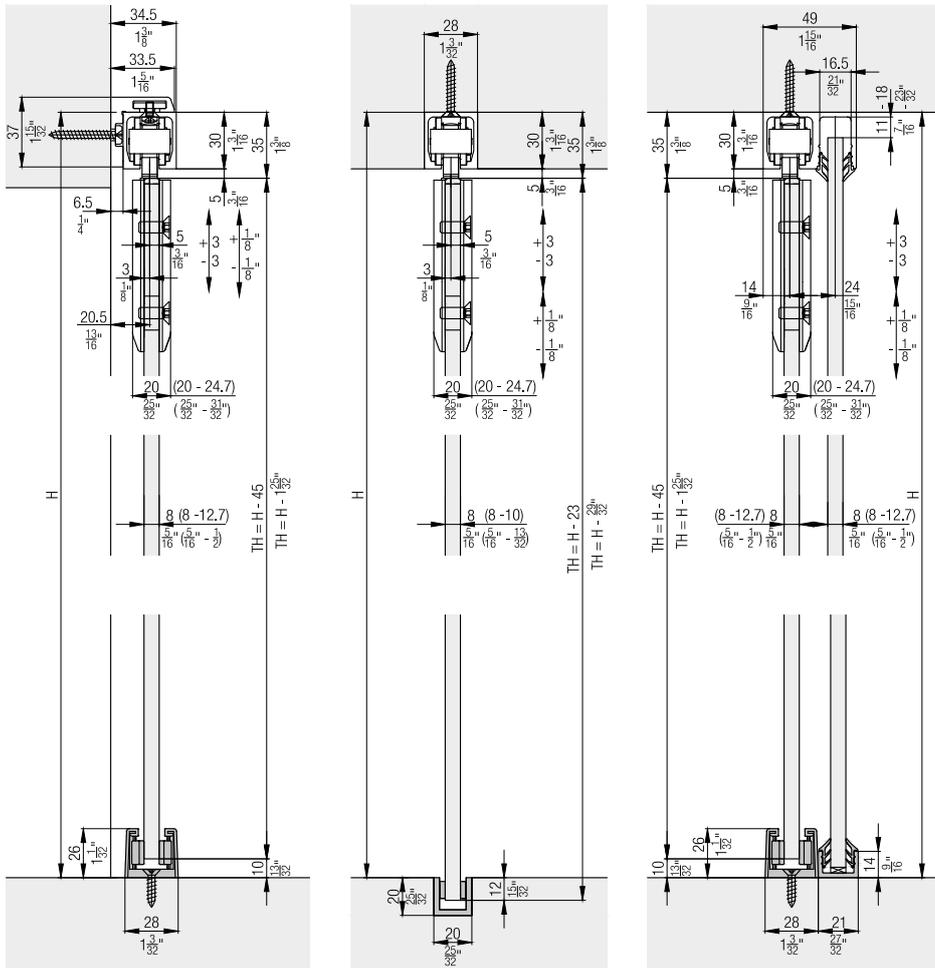

Set for 1 glass door up to 40 kg (88 lbs.)

		No.	
Hawa Junior 40 GP, for 1 door		25904	
		25904	No.
Set consisting of:			
	Two-wheeled running gear, M8, plastic wheels	2	25898
	Stopper, with adjustable retention spring	2	10640
	Suspension bolt M8 and mounting screws	2	16017
	Patch suspension, with glass holder insert, without mounting screws	2	20505
	Screw-on rubber door stop	1	10629
	Single use drilling jig	1	20400
	Vertical adjustment pin	1	16329


Bottom guides

		No.	
	Stop bumper, complete, for guide track 15405/15554	15636	
	Set of fixing parts for surface mounted bottom guide channel, 5-piece set	19162	
	Spring bottom guide for point fixing, with mounting screw	19118	
	Guide slider, rattle proof, plastic, with mounting screw, for patch suspension	16020	
	Patch suspension, with glass holder insert, without mounting screws	20505	
	Bottom guide, rattle proof, with self-adhesive sliders for satinised glass, glass thickness 8-12.7 mm (5/16"-1/2"), chrome-plated, matt	16029	
	Bottom guide, rattle proof, with self-adhesive sliders for satinised glass, glass thickness 8-12.7 mm (5/16"-1/2"), stainless steel look	21267	
	Sliders, for 10 mm glass (13/32"), self-adhesive, 6-piece set	16193	
	Sliders, for 8 mm (5/16") glass, self-adhesive, 6-piece set	16192	
	Distance plate to bottom guide	16657	

Cover caps

		No.
	Cover cap, rounded, plastic, chrome-plated, matt, 1 piece	16049
	Cover cap, rounded, plastic, chrome-plated, matt, 4-piece set	16042
	Cover cap, rounded, plastic, chromium finish polished, 1 piece	17161
	Cover cap, rounded, plastic, chromium finish polished, 4-piece set	17160
	Cover cap, rounded, plastic, stainless steel look, 1 piece	16051
	Cover cap, rounded, plastic, stainless steel look, 4-piece set	16044
	Cover cap, rounded, plastic, raw, 1 piece	15823
	Cover cap, square, plastic, chrome-plated, matt, 1 piece	19091
	Cover cap, square, plastic, chrome-plated, matt, 4-piece set	19092
	Cover cap, square, plastic, stainless steel look, 1 piece	19093
	Cover cap, square, plastic, stainless steel look, 4-piece set	19094
	Square cover plate, plastic, raw, 1 piece	19000
	Cover cap for running track Hawa Junior 40, plastic, anthracite	20901

Running tracks

		mm (inch)	No.
	Running track, aluminum, anodized, pre-drilled	1,400 (4' 7 1/8")	10213
		1,600 (5' 3")	10214
		1,800 (5' 10 7/8")	10215
		2,000 (6' 6 3/4")	10216
		2,500 (8' 2 7/16")	25997
		3,000 (9' 10 1/8")	18530
		4,000 (13' 1 15/32")	18531
		6,000 (19' 8 7/32")	10211
		cut to size	10217
	Running track, with fixed glass, aluminum, anodized, pre-drilled	cut to size	20103
	Cover profile to profile fixed glass, aluminum, anodized	cut to size	19548

Guide tracks

		mm (inch)	No.
	Surface-mounted guide track, aluminum, anodized	2,500 (8' 2 7/16")	19348
		3,500 (11' 5 25/32")	19349
		6,000 (19' 8 7/32")	18956
		cut to size	19350
	Guide track, aluminum, anodized, pre-drilled	6,000 (19' 8 7/32")	14414
		cut to size	14415
	Guide track, aluminum, anodized	6,000 (19' 8 7/32")	15405
		cut to size	15554

Running track set with fixed glazing, 2000 mm (6'6 3/4"), aluminum, anodized

		No.
Set running tracks, with fixed glass, aluminum, anodized, pre-drilled		20224

Set consisting of:

		mm (inch)	20224	No.
	Running track, with fixed glass, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	1	20101
	Cover profile to running track with fixed glass, aluminum, anodized	1,250 (4' 1 7/32 ")	1	19552

Running track set with fixed glazing, 6000 mm (19'8 7/32"), aluminum, anodized

		No.
Set running tracks, with fixed glass, aluminum, anodized, pre-drilled		20225

Set consisting of:

		mm (inch)	20225	No.
	Running track, with fixed glass, aluminum, anodized, pre-drilled	6,000 (19' 8 7/32 ")	1	20102
	Cover profile to running track with fixed glass, aluminum, anodized	3,000 (9' 10 1/8 ")	1	19562

Soft close SoftMove 40
For soft closing in opening and closing direction order 2 sets.

		No.
	Soft close SoftMove 40	25987


Angled profiles for wall mounting

		mm (inch)	No.
	Angled profile for wall mounting, aluminum, anodized, pre-drilled	2,000 (6' 6 3/4 ")	18291
		4,000 (13' 1 15/32 ")	18634
		6,000 (19' 8 7/32 ")	17691
		cut to size	17692

Individual components to angled profile

		No.
	Assembly set for wall mounting, 10-piece set	17785
	Cover cap, wall mounting, plastic, anthracite, 1 pair	20015

Base/wall profiles and rubber profiles for fixed glazing

		mm (inch)	No.
	Bottom-/wall profile to fixed glass, aluminum, anodized, pre-drilled	4,000 (13' 1 15/32 ")	19549
		6,000 (19' 8 7/32 ")	19561
		cut to size	20067
	Bottom-/wall profile to fixed glass, aluminum, stainless steel look, brushed, pre-drilled	4,000 (13' 1 15/32 ")	21285
		6,000 (19' 8 7/32 ")	21286
		cut to size	21287
	Rubber profile, black, to fixed glass 8-9.9 mm (5/16"-13/32")	10,000 (32' 9 11/16 ")	25787
		Rubber profile, black, to fixed glass 10-12 mm (13/32"-15/32")	10,000 (32' 9 11/16 ")
	Rubber profile, black, to fixed glass 12.1-13.1 mm (15/32"-1/2")	10,000 (32' 9 11/16 ")	25763

Vertical sealing profiles

		mm (inch)	No.
	Vertical seal 13/18, aluminum, anodized, for fixed glass with glass distance 13–18,5 mm (1/2"–3/4")	2,500 (8' 2 7/16")	20283
		3,500 (11' 5 25/32")	20284
	Vertical seal 13/18, aluminum, stainless steel look, brushed, for fixed glass distance 13–18,5 mm (1/2"–3/4")	2,500 (8' 2 7/16")	21290
		3,500 (11' 5 25/32")	21291
	Vertical seal 20/22, aluminum, anodized, for fixed glass with glass distance 20–22 mm (25/32"–7/8")	2,500 (8' 2 7/16")	20650
		3,500 (11' 5 25/32")	20651

Accessories

		No.
	Bottom door stopper, with centering, stainless steel look	21473
	Bottom door stopper, with centering, chrome-plated, matt	20773
	Centering assembly grey, for all glass sliding doors	18619
	Centering assembly black, for all glass sliding doors, to wall profile	18663

Wall connection


		mm (inch)	No.
	Wall profile, aluminum, anodized	2,500 (8' 2 7/16")	17020
		3,500 (11' 5 25/32")	17021
	Wall profile, aluminum, stainless steel look, brushed	2,500 (8' 2 7/16")	20119
		3,500 (11' 5 25/32")	20120
	Seal profile, black, for wall profile	2,500 (8' 2 7/16")	16452
		3,500 (11' 5 25/32")	16453

Protective edge trims

		mm (inch)	No.
	Rubber profile self-adhesive, black, for 8–12,7 mm (5/16"–1/2") glass thickness, glass distance 4 mm	5,000 (16' 4 27/32")	19442
		10,000 (32' 9 11/16")	19443
		50,000 (164' 1/2 ")	19444
	Rubber profile self-adhesive, translucent, for 8–12,7 mm (5/16"–1/2") glass thickness, glass distance 4 mm	5,000 (16' 4 27/32")	19445
		10,000 (32' 9 11/16")	19446
		50,000 (164' 1/2 ")	19447


Angled profile for wall mounting

The intelligent wall mounting with the angled profile for Hawa Junior running tracks for a door weight of up to 40 kg (88 lbs.).

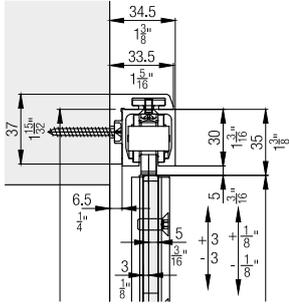


Base/wall profile for fixed glazing

The retainer profile, placed on the floor or flush with the floor, ensures the stability of the fixed glass panels.

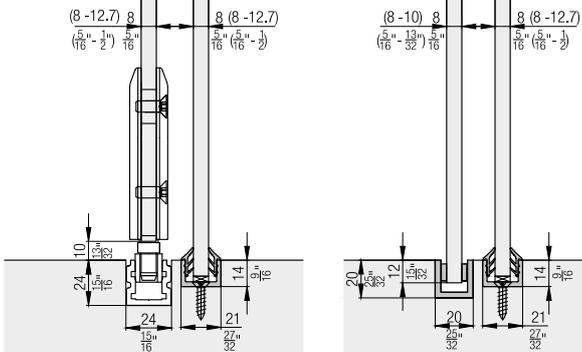


Rubber profile for glass edge protection

The self-adhesive rubber profile, mounted on the glass edge, reduces drafts to a minimum and protects the glass edge from collisions of the all-glass sliding doors.

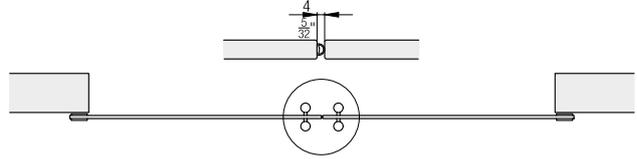


Vertical sealing profile

The vertical sealing profile is effective against draughts. The slim aluminium profile affixes frontally to glass elements 8–12 mm (5/16" to 15/32") thick using silicone adhesive. The two-part rubber seal is recessed into the profile and it slides almost noiselessly and creates minimal resistance to motion.

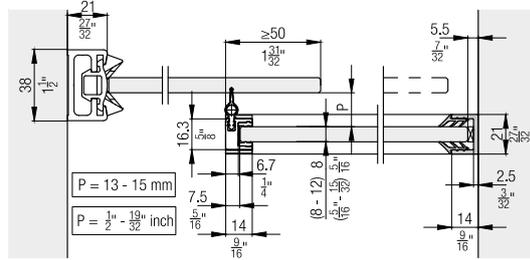



Wall connection

Optimal wall connection for all-glass sliding doors with unprotected glass edge.

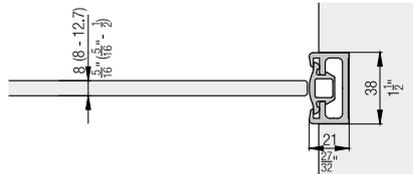

SoftMove 40 soft closing mechanism

Completely integrated into the running track, the SoftMove decelerates sliding doors and draws them into their final position.

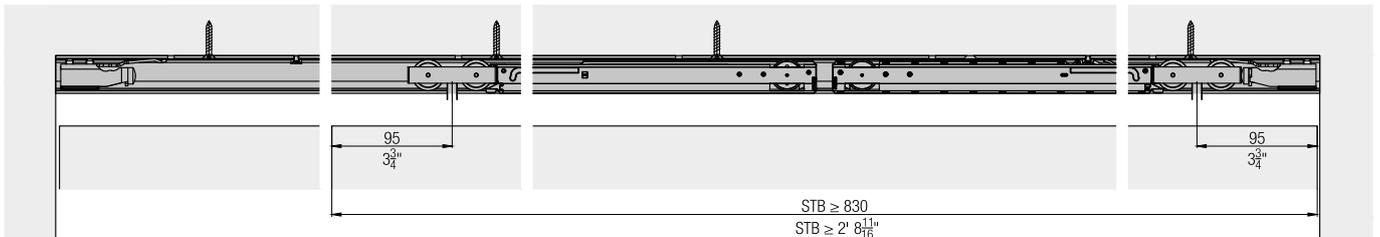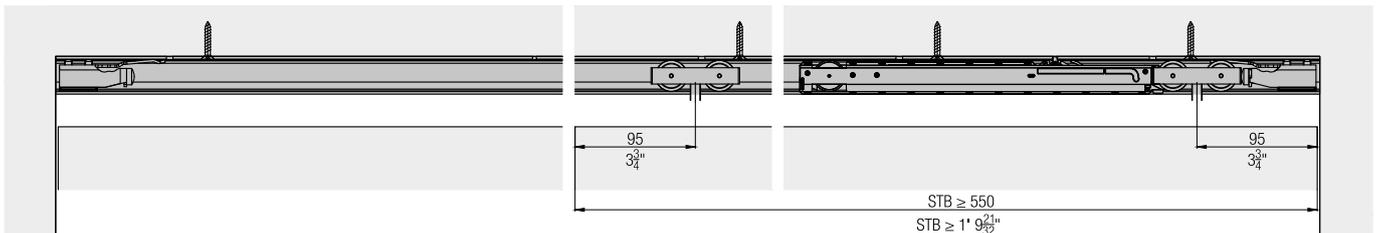

Accessories

- Lock solutions from page 511
- General accessories from page 518
- Glass recommendations from page 536

Planning/execution

Further information about the product can be found on www.hawa.com.