








Fitting for top-running glass doors up to 80 kg (176 lbs.), with surface mounted running track. Optionally with soft and self closing mechanism. Wall or ceiling mounting.

Product highlights


-  **Productivity** Easy clamping mounting of the glass door to the suspension without a glass cut-out
-  **Comfort** Very quiet running and smooth sliding with high quality soft and self closing system

Technical specifications

-  Max. 80 kg (176 lbs.)
-  Max. 4000 mm (13' 1 15/32")
-  Max. 3000 mm (9' 10 1/8")
-  8–12.7 mm (5/16" to 1/2")

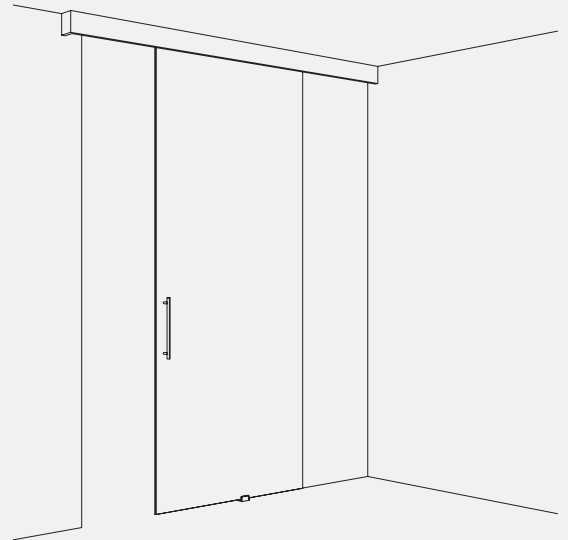





Installation examples

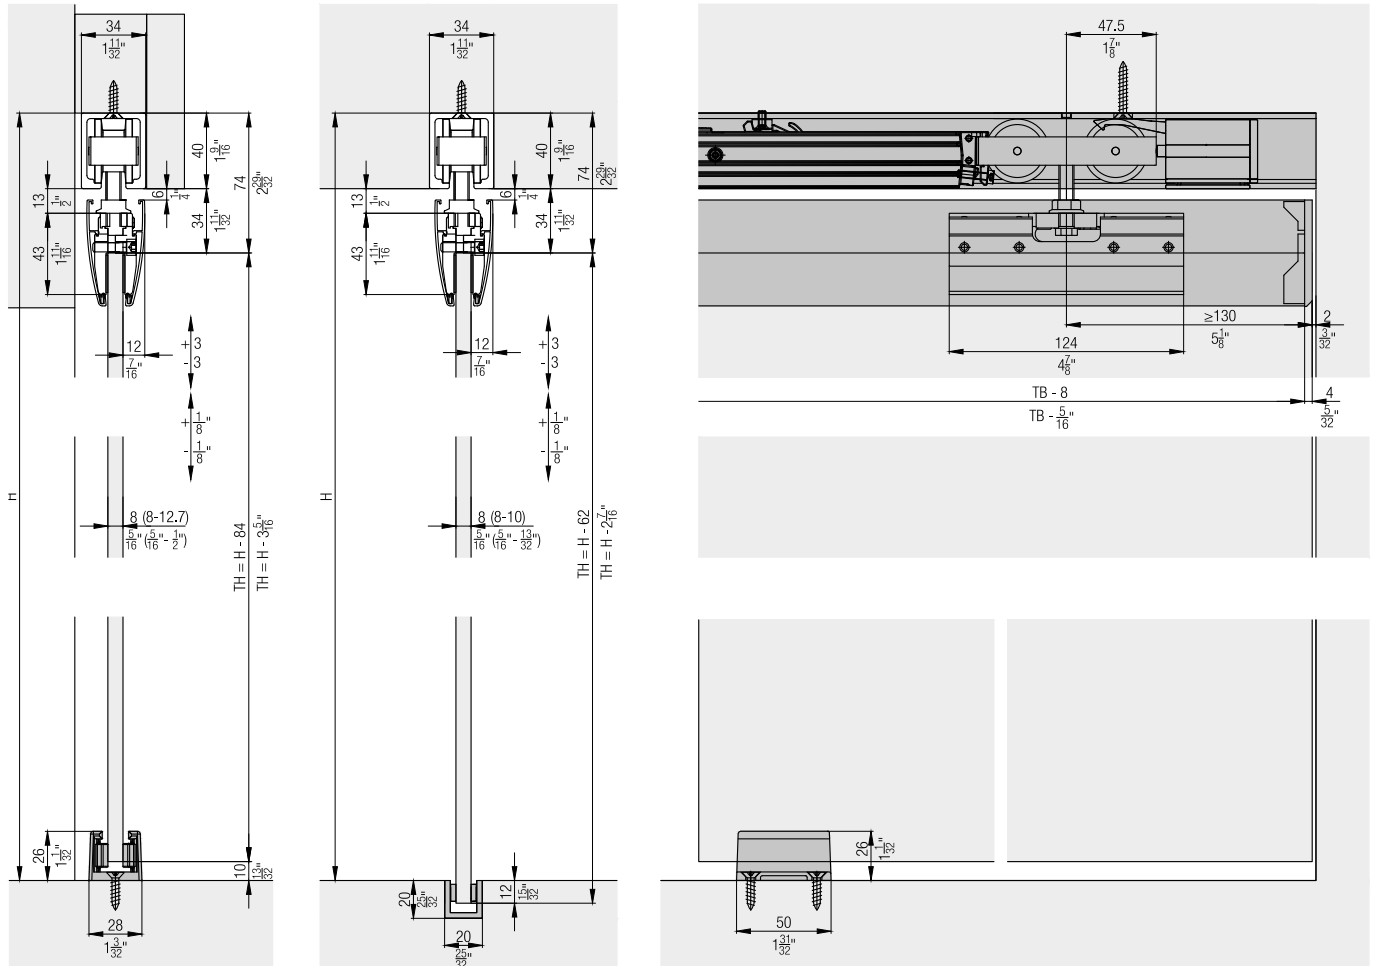





Set for 1 glass door up to 80 kg (176 lbs.)

| | No. |
|---------------------------|-------|
| Hawa Junior 80 GS, 1 door | 17941 |


Set consisting of:

| | 17941 | No. |
|--|-------|-------|
|  Running gear, 2-wheeled, M10, plastic wheels | 2 | 10407 |
|  Stopper Hawa Junior 80/100, with adjustable retention spring | 2 | 30138 |
|  Clamping shoe, with suspension bolt M10 | 2 | 16132 |
|  Screw-on rubber door stop | 1 | 10629 |


Running tracks

| | No. |
|---|-------|
|  Sliders, for 10 mm (13/32"), self-adhesive, 6-piece set | 16193 |
|  Sliders, for 8 mm (5/16") glass, self-adhesive, 6-piece set | 16192 |
|  Bottom guide, rattle proof, with self-adhesive sliders for satinised glass, glass thickness 8–12.7 mm (5/16" to 1/2"), chrome-plated, matt | 16029 |
|  Bottom guide, rattle proof, with self-adhesive sliders for satinised glass, glass thickness 8–12.7 mm (5/16" to 1/2"), stainless steel look | 21267 |


Running tracks

| | Running track, aluminum, anodized, pre-drilled | mm (inch) | No. |
|---|--|-----------------------|-------|
|  | | 1,400 (4' 7 1/8 ") | 10189 |
| | | 1,600 (5' 3 ") | 10190 |
| | | 1,800 (5' 10 7/8 ") | 10191 |
| | | 2,000 (6' 6 3/4 ") | 10192 |
| | | 2,200 (7' 2 5/8 ") | 10193 |
| | | 2,500 (8' 2 7/16 ") | 10194 |
| | | 3,000 (9' 10 1/8 ") | 18532 |
| | | 4,000 (13' 1 15/32 ") | 18533 |
| | | 6,000 (19' 8 7/32 ") | 10186 |
| | | cut to size | 10188 |







Guide tracks

| | Guide track, aluminum, anodized, pre-drilled | mm (inch) | No. |
|---|--|----------------------|-------|
|  | | 6,000 (19' 8 7/32 ") | 14414 |
| | | cut to size | 14415 |

Panels


| | Clip-on panel, for clamping shoe, aluminum, anodized | mm (inch) | No. |
|---|--|----------------------|--------------|
|  | | 2,500 (8' 2 7/16 ") | 057.3039.250 |
| | | 6,000 (19' 8 7/32 ") | 057.3039.600 |
| | | cut to size | 057.3039.990 |

End cap set


| | | No. | |
|---|---|--------------|--------------|
| End cap for panels | | 057.3061.072 | |
| | | 057.3061.072 | No. |
| Set consisting of: | | | |
|  | End cap, left for panel, plastique, anthracite | 2 | 057.3059.001 |
|  | End cap, right for panel, plastique, anthracite | 2 | 057.3059.002 |
|  | End cap holder, plastic, anthracite | 2 | 057.0141.001 |
|  | Clip to panel, plastic, gray | 4 | 057.3060.001 |
|  | Head cap screw, M5x18 mm (3/16"x23/32"), steel, zinc-plated | 8 | 600.0000.661 |
|  | Head cap screw, M5x20 mm (3/16"x25/32"), steel, zinc-plated | 8 | 763.0508.120 |

Soft close




For soft closing in opening and closing direction order 2 sets.

| | | No. |
|---|------------------------------------|-------|
|  | Soft closing mechanism SoftMove 80 | 22444 |



Angled profiles for wall mounting

| | | mm (inch) | No. |
|---|---|----------------------|-------|
|  | Angled profile for wall mounting, aluminum, anodized, pre-drilled | 2,500 (8' 2 7/16") | 24953 |
| | | 4,000 (13' 1 15/32") | 24952 |
| | | 6,000 (19' 8 7/32") | 24951 |
| | | cut to size | 24954 |


Individual components to angled profile

| | | No. |
|---|--|-------|
|  | Assembly set to angled profile, 10-piece set | 17786 |
|  | Cover cap to angled profile, steel, chrome-plated, matt, suitable to both side | 24961 |
|  | Connecting pins to profiles, 2-piece set | 21347 |





Wall connection

| | | mm (inch) | No. |
|--|---------------------------------------|----------------------|-------|
|  | Wall profile, aluminum, anodized | 2,500 (8' 2 7/16") | 17020 |
| | | 3,500 (11' 5 25/32") | 17021 |
|  | Seal profile, black, for wall profile | 2,500 (8' 2 7/16") | 16452 |
| | | 3,500 (11' 5 25/32") | 16453 |

Protective edge trims


| | | mm (inch) | No. |
|---|---|-----------------------|-------|
|  | Rubber profile self-adhesive, black, for 8–12.7 mm (5/16" to 1/2") glass thickness, glass distance 4 mm | 5,000 (16' 4 27/32") | 19442 |
| | | 10,000 (32' 9 11/16") | 19443 |
| | | 50,000 (164' 1/2") | 19444 |
| | Rubber profile self-adhesive, translucent, for 8–12.7 mm (5/16" to 1/2") glass thickness, glass distance 4 mm | 5,000 (16' 4 27/32") | 19445 |
| | | 10,000 (32' 9 11/16") | 19446 |
| | | 50,000 (164' 1/2") | 19447 |

Accessories

| | | No. |
|---|--|-------|
|  | Bottom door stopper, with centering, stainless steel look | 21473 |
|  | Bottom door stopper, with centering, chrome-plated, matt | 20773 |
|  | Centering assembly grey, for all glass sliding doors | 18619 |
|  | Centering assembly black, for all glass sliding doors, to wall profile | 18663 |


Angled profile for wall mounting

The intelligent wall mounting with the angled profile for Hawa Junior running tracks for a door weight of up to 80 kg (176 lbs.).

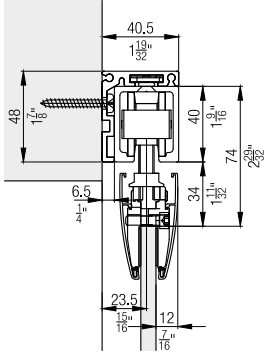


Wall connection

Optimal wall connection for all-glass sliding doors with unprotected glass edge.

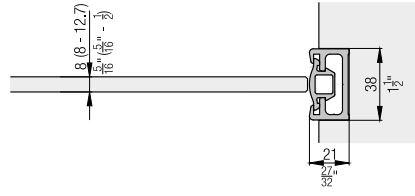


Rubber profile for glass edge protection

The self-adhesive rubber profile, mounted on the glass edge, reduces drafts to a minimum and protects the glass edge from collisions of the all-glass sliding doors.

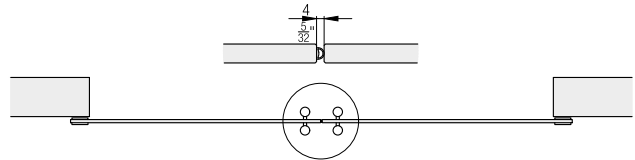

SoftMove 80 soft closing mechanism

Completely integrated into the running track, the SoftMove decelerates sliding doors and draws them into their final position.

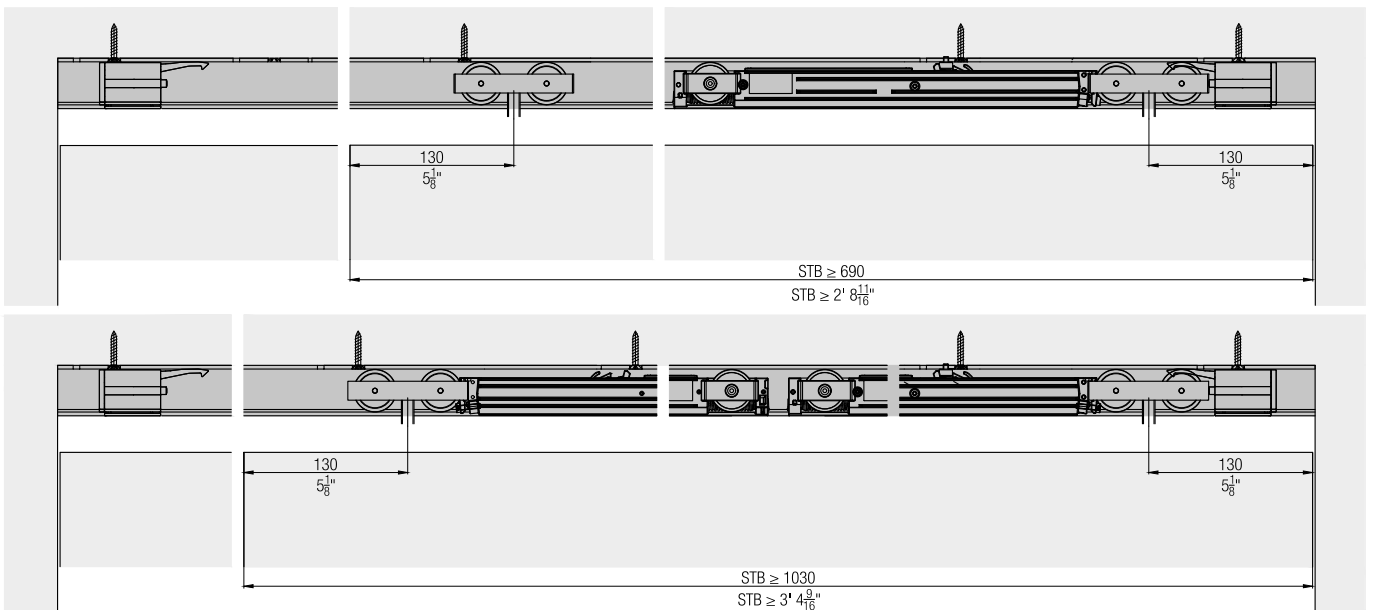

Accessories

- Lock solutions from page 511
- General accessories from page 518
- Glass recommendations from page 536

Planning/execution

Further information about the product can be found on www.hawa.com.